



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
781-181
 Component
Diesel Engine
 Fluid
{not provided} (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL06159617	RPL06001348	RPL05925889
Sample Date		Client Info		20 Apr 2024	25 Oct 2023	10 Aug 2023
Machine Age	mls	Client Info		293779	251539	224071
Oil Age	mls	Client Info		10199	27468	7502
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	26	36	15
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	6	9	9
Lead	ppm	ASTM D5185m	>40	<1	<1	<1
Copper	ppm	ASTM D5185m	>330	2	4	1
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	9	10
Potassium	ppm	ASTM D5185m	>20	6	14	11
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.7	0.8	0.4
Nitration	Abs/cm	*ASTM D7624	>20	11.5	13.4	10.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.0	29.2	24.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	3	1
Boron	ppm	ASTM D5185m		57	27	103
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		136	119	121
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		738	661	696
Calcium	ppm	ASTM D5185m		1777	1665	1614
Phosphorus	ppm	ASTM D5185m		710	581	698
Zinc	ppm	ASTM D5185m		912	781	878
Sulfur	ppm	ASTM D5185m		3007	2343	3004
Oxidation	Abs/.1mm	*ASTM D7414	>25	25.4	30.6	21.4
Base Number (BN)	mg KOH/g	ASTM D2896		5.0	▲ 3.2	6.4
Visc @ 100°C	cSt	ASTM D445		14.3	14.5	14.0

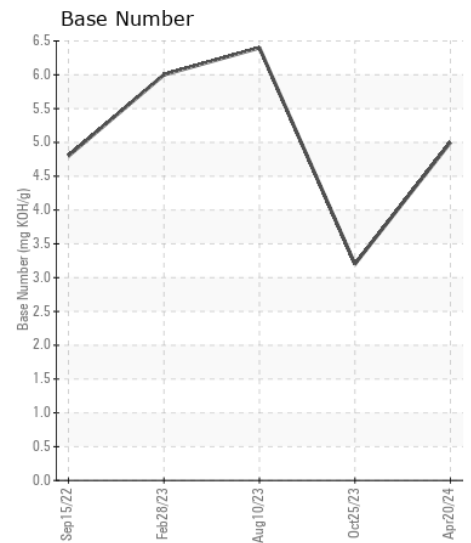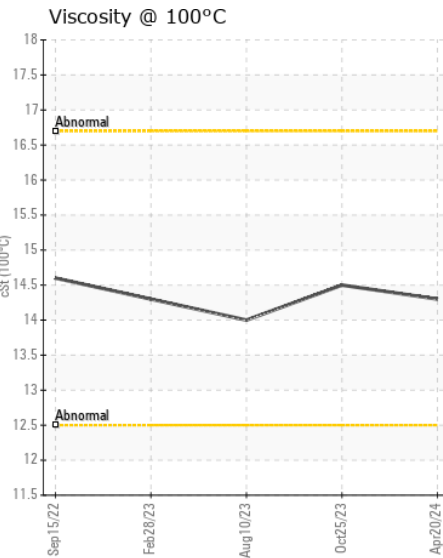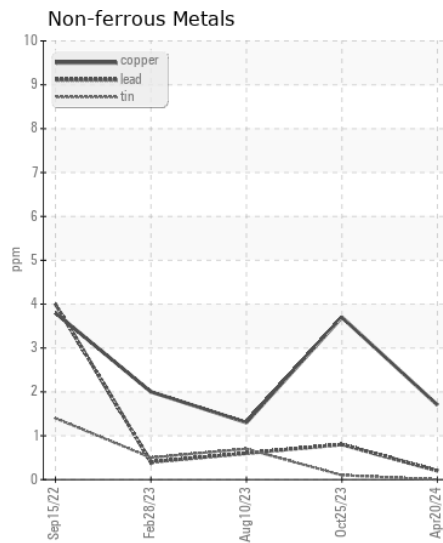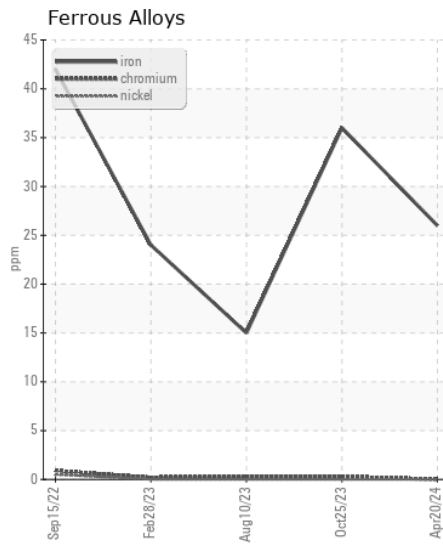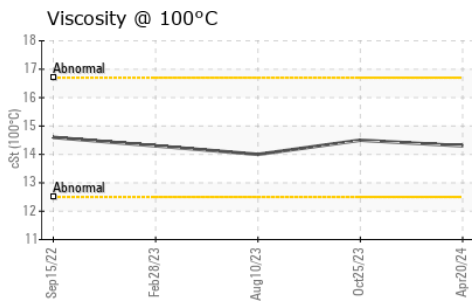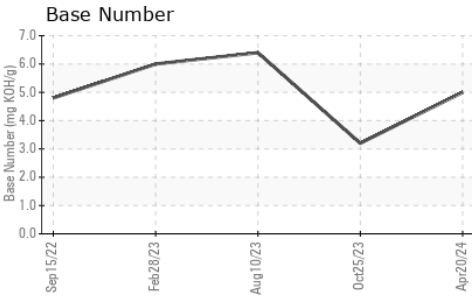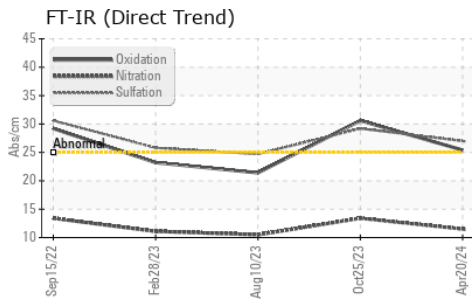

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL06159617
Lab Number : 06159617
Unique Number : 10995040
Test Package : FLEET

Received : 24 Apr 2024
Tested : 25 Apr 2024
Diagnosed : 26 Apr 2024 - Sean Felton

RTL PACLEASE - 7050 -Leasing Tyler
 10791 Hwy 69 North
 Tyler, TX
 US 75706

Contact: Justin Cooper
 CooperJ1@RushEnterprises.Com

T: (903)405-3000

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: