



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**ROBIN B INGRAM**  
Machine Id  
**[ROBIN B INGRAM] 006 617985-6**  
Component  
**Starboard Reduction Gear**  
Fluid  
**CHEVRON MEROPA 320 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW06159842</b>	MW0053729	MW06036192
Sample Date		Client Info		<b>29 Feb 2024</b>	01 Feb 2024	16 Dec 2023
Machine Age	hrs	Client Info		<b>63976</b>	63411	0
Oil Age	hrs	Client Info		<b>0</b>	63411	0
Filter Age	hrs	Client Info		<b>0</b>	400	0
Oil Changed		Client Info		<b>N/A</b>	Not Changd	N/A
Filter Changed		Client Info		<b>N/A</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>60</b>	50	62
Chromium	ppm	ASTM D5185m	>10	<b>1</b>	0	0
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>1</b>	0	<1
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>5</b>	4	4
Lead	ppm	ASTM D5185m	>100	<b>2</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>7</b>	5	6
Tin	ppm	ASTM D5185m	>10	<b>1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>12</b>	8	8
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	2	1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>11</b>	10	14
Boron	ppm	ASTM D5185m	20	<b>7</b>	4	5
Barium	ppm	ASTM D5185m		<b>39</b>	38	39
Molybdenum	ppm	ASTM D5185m	0	<b>3</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>2</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>4</b>	0	0
Calcium	ppm	ASTM D5185m	25	<b>48</b>	36	43
Phosphorus	ppm	ASTM D5185m	235	<b>243</b>	243	238
Zinc	ppm	ASTM D5185m		<b>15</b>	6	7
Sulfur	ppm	ASTM D5185m		<b>7795</b>	8435	7226
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	<b>0.99</b>	1.00	0.89
Visc @ 40°C	cSt	ASTM D445	304	<b>345</b>	341	341

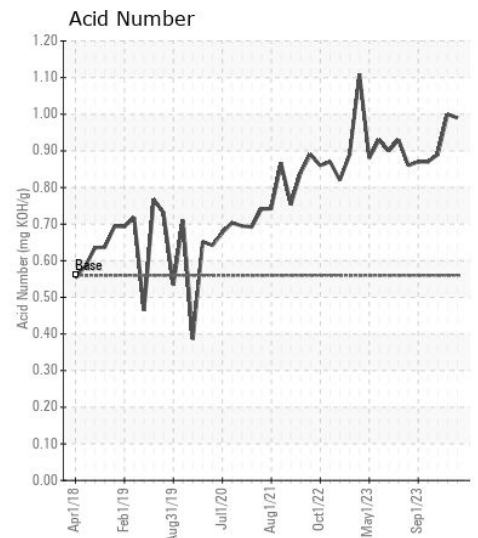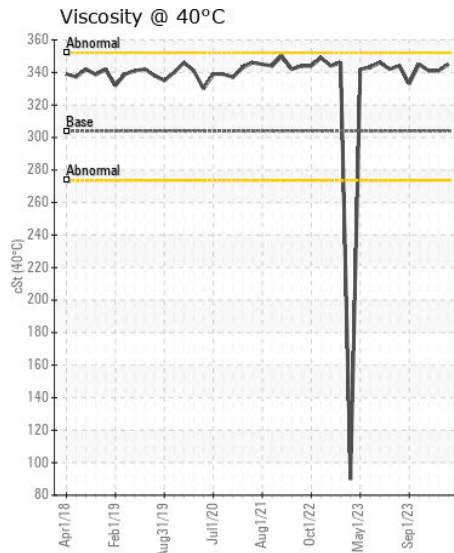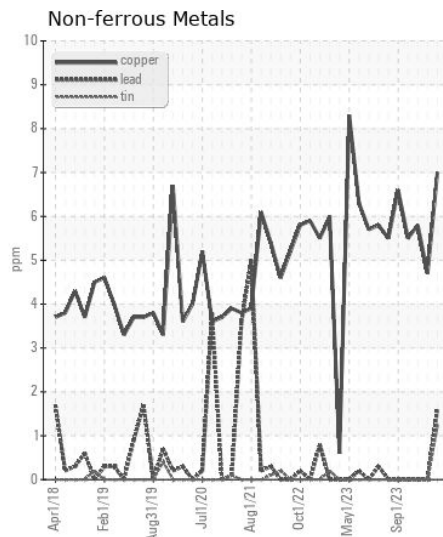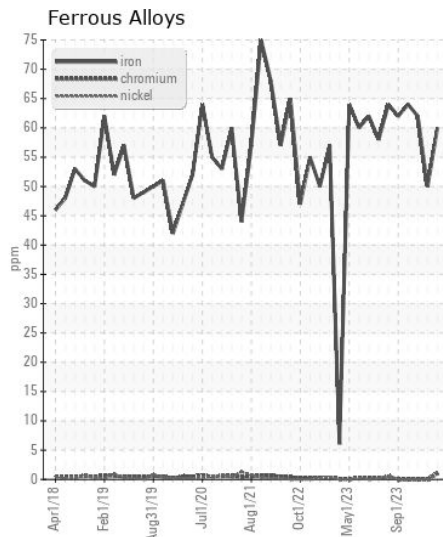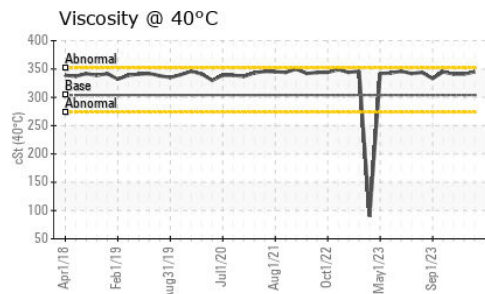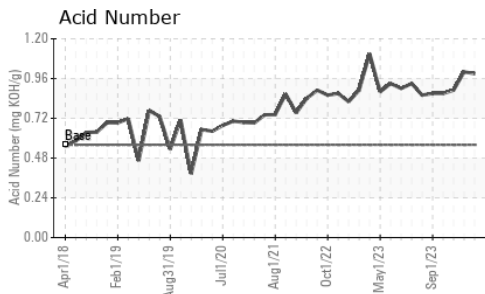

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW06159842

**Lab Number** : 06159842

**Unique Number** : 10995265

**Test Package** : MAR 2

**Received** : 24 Apr 2024

**Tested** : 25 Apr 2024

**Diagnosed** : 25 Apr 2024 - Wes Davis

**INGRAM BARGE**

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: ANTHONY VAN CURA

anthony.vancura@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)