



|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Area  
**CAMILLE B BARRETT**  
Machine Id  
**[CAMILLE B BARRETT] 002 538801-2**  
Component  
**Center Main Engine**  
Fluid  
**CHEVRON DELO 710 LS (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>MW0068681</b>   | MW0061373   | MW0061368   |
| Sample Date    |     | Client Info |           | <b>01 Apr 2024</b> | 20 Feb 2024 | 01 Feb 2024 |
| Machine Age    | hrs | Client Info |           | <b>31616</b>       | 30832       | 30181       |
| Oil Age        | hrs | Client Info |           | <b>31616</b>       | 30832       | 30181       |
| Filter Age     | hrs | Client Info |           | <b>419</b>         | 83          | 36          |
| Oil Changed    |     | Client Info |           | <b>Not Changd</b>  | Not Changd  | Not Changd  |
| Filter Changed |     | Client Info |           | <b>Not Changd</b>  | Changed     | Not Changd  |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

**WEAR**

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >75  | <b>14</b>    | 12   | 7    |
| Chromium     | ppm    | ASTM D5185m | >8   | <b>3</b>     | 2    | 1    |
| Nickel       | ppm    | ASTM D5185m | >2   | <b>1</b>     | <1   | 0    |
| Titanium     | ppm    | ASTM D5185m | >3   | <b>&lt;1</b> | <1   | 0    |
| Silver       | ppm    | ASTM D5185m | >2   | <b>&lt;1</b> | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >15  | <b>4</b>     | 2    | 2    |
| Lead         | ppm    | ASTM D5185m | >18  | <b>8</b>     | 5    | 5    |
| Copper       | ppm    | ASTM D5185m | >80  | <b>28</b>    | 20   | 16   |
| Tin          | ppm    | ASTM D5185m | >14  | <b>6</b>     | 4    | 3    |
| Vanadium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | <1   | 0    |
| White Metal  | scalar | *Visual     | NONE | <b>LIGHT</b> | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

**CONTAMINATION**

There is no indication of any contamination in the oil.


|                  |          |             |       |                |       |       |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon          | ppm      | ASTM D5185m | >20   | <b>7</b>       | 5     | 4     |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>3</b>       | 2     | 0     |
| Fuel             |          | WC Method   | >4.0  | <b>&lt;1.0</b> | <1.0  | <1.0  |
| Water            |          | WC Method   | >0.1  | <b>NEG</b>     | NEG   | NEG   |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | NEG   | NEG   |
| Soot %           | %        | *ASTM D7844 |       | <b>0.6</b>     | 0.5   | 0.5   |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>9.1</b>     | 9.1   | 9.3   |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>17.3</b>    | 17.4  | 17.5  |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Emulsified Water | scalar   | *Visual     | >0.1  | <b>NEG</b>     | NEG   | NEG   |

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |      |              |      |      |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium           | ppm      | ASTM D5185m | >75  | <b>12</b>    | 13   | 10   |
| Boron            | ppm      | ASTM D5185m |      | <b>59</b>    | 44   | 28   |
| Barium           | ppm      | ASTM D5185m |      | <b>&lt;1</b> | 0    | 0    |
| Molybdenum       | ppm      | ASTM D5185m |      | <b>71</b>    | 50   | 43   |
| Manganese        | ppm      | ASTM D5185m |      | <b>3</b>     | 2    | 1    |
| Magnesium        | ppm      | ASTM D5185m |      | <b>18</b>    | 13   | 17   |
| Calcium          | ppm      | ASTM D5185m |      | <b>5209</b>  | 3512 | 3299 |
| Phosphorus       | ppm      | ASTM D5185m |      | <b>15</b>    | 7    | 9    |
| Zinc             | ppm      | ASTM D5185m |      | <b>8</b>     | 5    | 9    |
| Sulfur           | ppm      | ASTM D5185m |      | <b>3827</b>  | 2288 | 2109 |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25  | <b>9.3</b>   | 9.2  | 9.4  |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 10.5 | <b>9.01</b>  | 8.94 | 9.22 |
| Visc @ 100°C     | cSt      | ASTM D445   | 15.5 | <b>15.0</b>  | 14.9 | 14.9 |


**FT-IR (Direct Trend)**

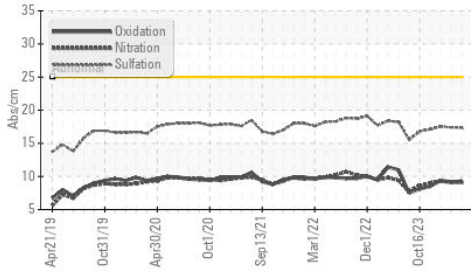


**Base Number**

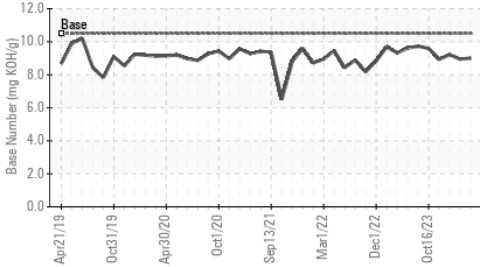


**Viscosity @ 100°C**

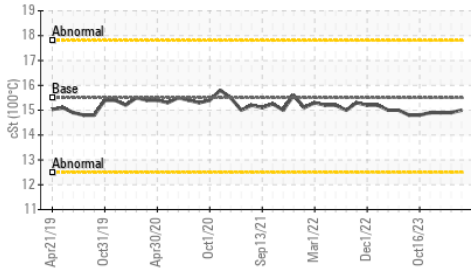


**Ferrous Alloys**

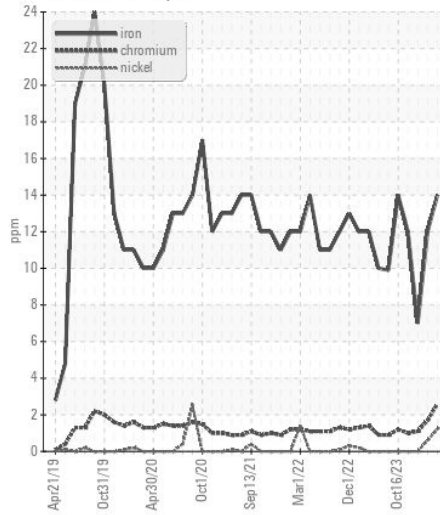


**Non-ferrous Metals**

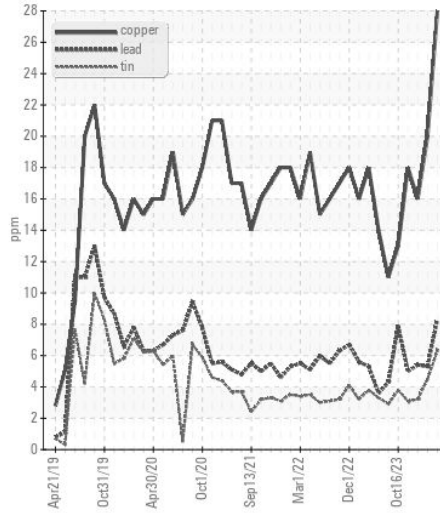

**Viscosity @ 100°C**

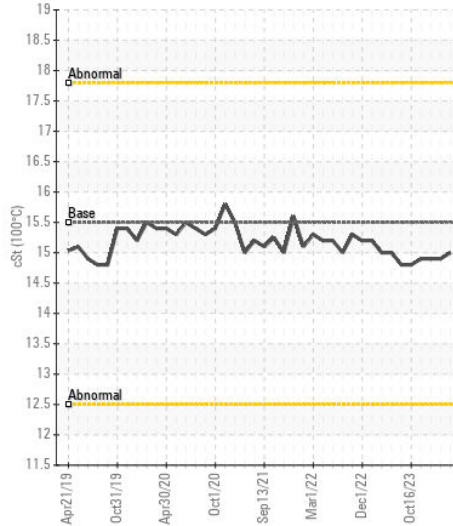

**Base Number**

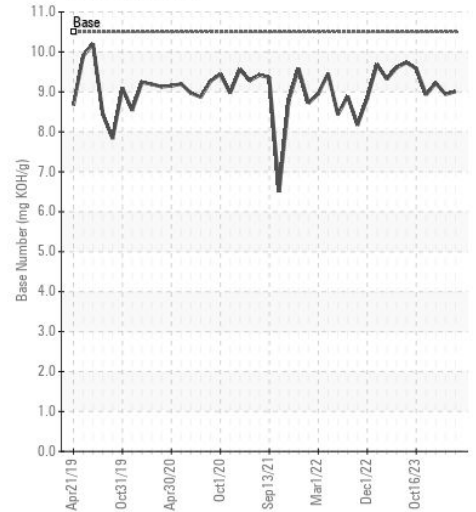

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0068681 **Received** : 24 Apr 2024  
**Lab Number** : 06159851 **Tested** : 25 Apr 2024  
**Unique Number** : 10995274 **Diagnosed** : 26 Apr 2024 - Sean Felton  
**Test Package** : MAR 2

**INGRAM BARGE**  
 900 S 3RD ST  
 PADUCAH, KY  
 US 42003

Contact: GLENN ELLIS  
 glen.ellis@ingrambarga.com  
 T: (270)415-4467  
 F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)