



WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 325G 1T0325GKCMJ394970**

Component  
**Right Final Drive**

Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0205894	---	---
Sample Date		Client Info		19 Apr 2024	---	---
Machine Age	hrs	Client Info		1610	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

### WEAR

Gear wear is indicated.

PQ		ASTM D8184	>1250	171	---	---
Iron	ppm	ASTM D5185m	>750	▲ 940	---	---
Chromium	ppm	ASTM D5185m	>9	▲ 12	---	---
Nickel	ppm	ASTM D5185m	>10	10	---	---
Titanium	ppm	ASTM D5185m		2	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>40	22	---	---
Lead	ppm	ASTM D5185m	>15	2	---	---
Copper	ppm	ASTM D5185m	>40	3	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		1	---	---
White Metal	scalar	*Visual	NONE	MODER	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	63	---	---
Potassium	ppm	ASTM D5185m	>20	15	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	5	---	---
Boron	ppm	ASTM D5185m	400	34	---	---
Barium	ppm	ASTM D5185m	200	37	---	---
Molybdenum	ppm	ASTM D5185m	12	3	---	---
Manganese	ppm	ASTM D5185m		10	---	---
Magnesium	ppm	ASTM D5185m	12	7	---	---
Calcium	ppm	ASTM D5185m	150	16	---	---
Phosphorus	ppm	ASTM D5185m	1650	505	---	---
Zinc	ppm	ASTM D5185m	125	28	---	---
Sulfur	ppm	ASTM D5185m	22500	24562	---	---
Visc @ 40°C	cSt	ASTM D445	143	146	---	---

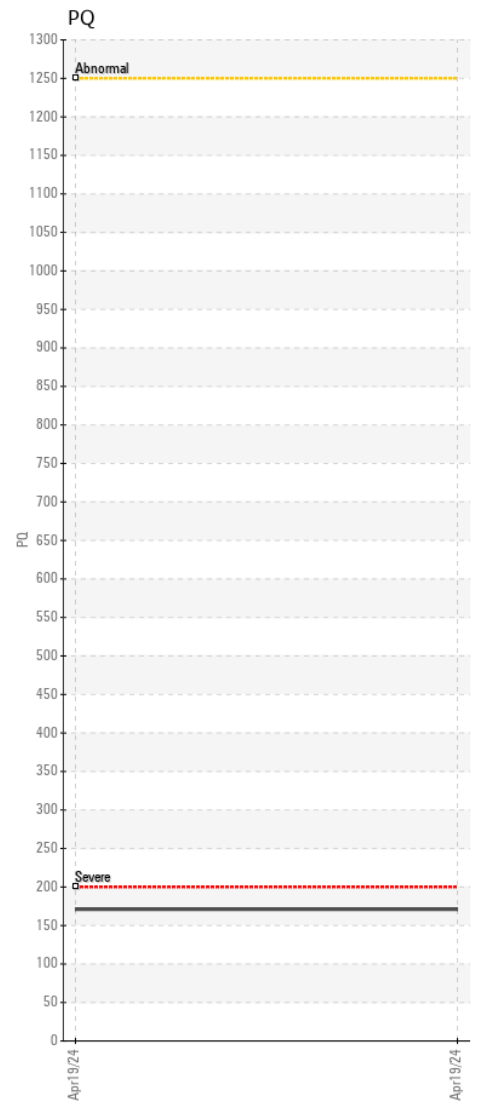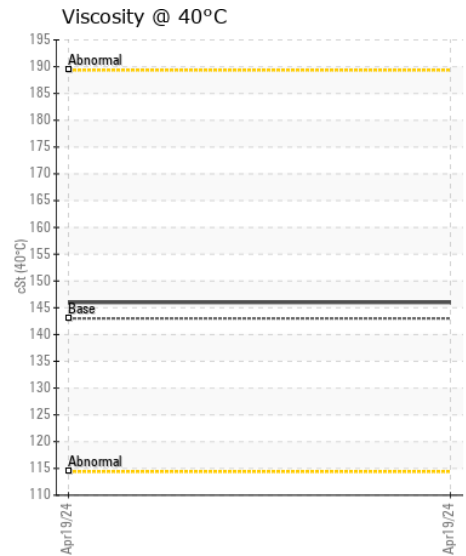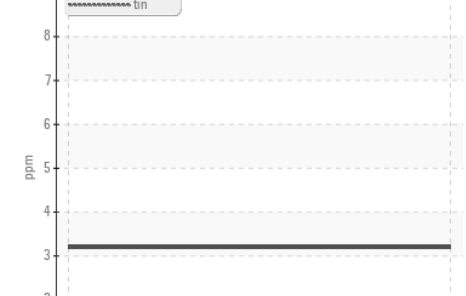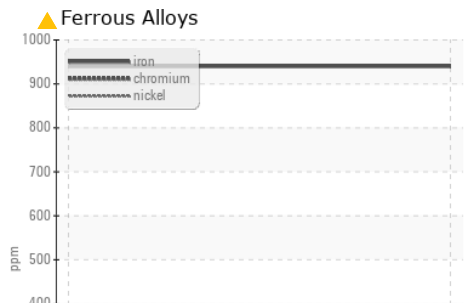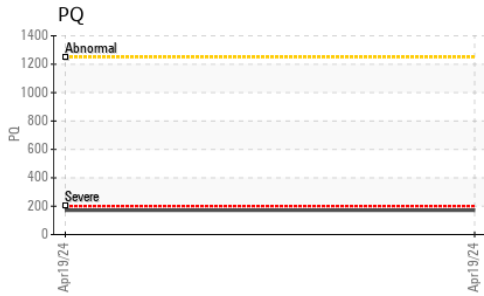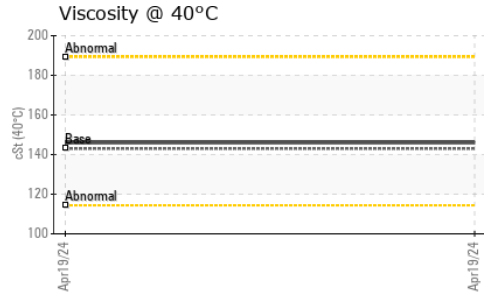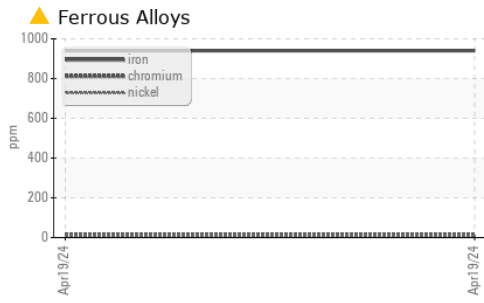

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0205894 **Received** : 24 Apr 2024  
**Lab Number** : 06159884 **Tested** : 25 Apr 2024  
**Unique Number** : 10995307 **Diagnosed** : 26 Apr 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - CHARLOTTE**  
 9550 STATESVILLE ROAD  
 CHARLOTTE, NC  
 US 28269

Contact: CHARLOTTE SHOP  
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211  
 F: (704)596-6198