



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KOMATSU DOZ-5
Component
Right Final Drive
Fluid
TDTO FLUID SAE 30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CL0005374	CL0004129	CL0003269
Sample Date		Client Info		18 Apr 2024	16 Mar 2023	06 Jun 2022
Machine Age	hrs	Client Info		4140	3595	2904
Oil Age	hrs	Client Info		545	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	47	134	91
Chromium	ppm	ASTM D5185m	>10	1	2	2
Nickel	ppm	ASTM D5185m	>10	1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		<1	0	<1
Aluminum	ppm	ASTM D5185m	>25	2	4	4
Lead	ppm	ASTM D5185m	>25	1	<1	0
Copper	ppm	ASTM D5185m	>50	6	23	15
Tin	ppm	ASTM D5185m	>10	1	0	0
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	18	26	25
Potassium	ppm	ASTM D5185m	>20	3	0	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	<1	0
Boron	ppm	ASTM D5185m	37	3	13	18
Barium	ppm	ASTM D5185m	7	0	0	2
Molybdenum	ppm	ASTM D5185m	5	8	9	8
Manganese	ppm	ASTM D5185m		1	2	1
Magnesium	ppm	ASTM D5185m	40	64	48	42
Calcium	ppm	ASTM D5185m	2650	3339	4020	3893
Phosphorus	ppm	ASTM D5185m	1050	1078	842	872
Zinc	ppm	ASTM D5185m	1075	1231	1068	1076
Sulfur	ppm	ASTM D5185m	5750	5673	6330	5886
Visc @ 40°C	cSt	ASTM D445	101	92.3	90.5	88.6

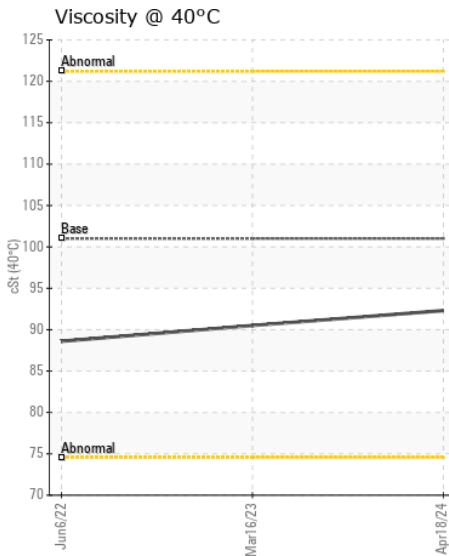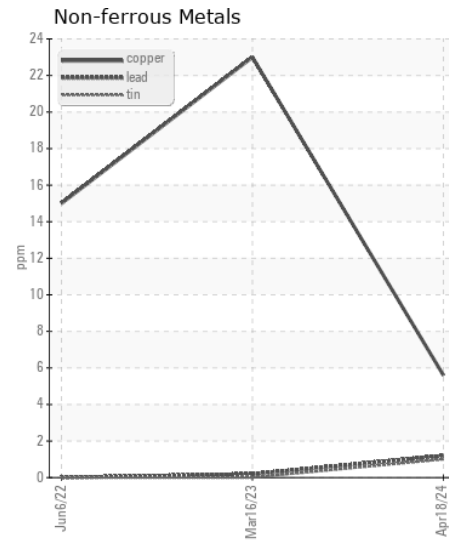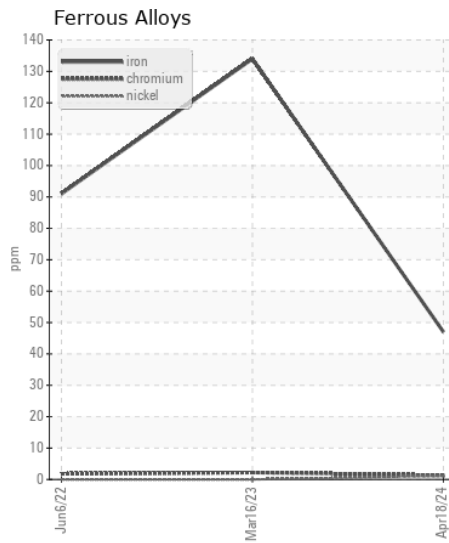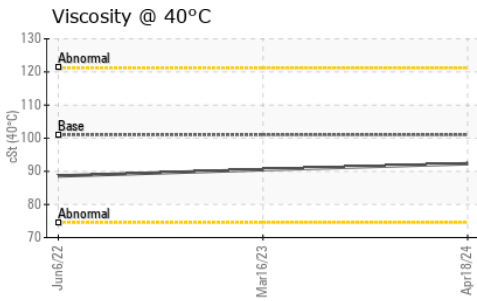

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : CL0005374
Lab Number : 06159903
Unique Number : 10995326
Test Package : CONST
Received : 24 Apr 2024
Tested : 25 Apr 2024
Diagnosed : 25 Apr 2024 - Wes Davis

BULLSEYE CONSTRUCTION
 581 N POLK ST
 PINEVILLE, NC
 US 28134
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: