



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**KOMATSU PC-300 LC-7HD TH-7 (S/N A86079)**  
Component  
**Left Final Drive**  
Fluid  
**TDTO FLUID SAE 30 (3 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>CL0005331</b>	CL0004742	CL0004296
Sample Date		Client Info		<b>15 Apr 2024</b>	18 Sep 2023	07 May 2023
Machine Age	hrs	Client Info		<b>22705</b>	22070	21500
Oil Age	hrs	Client Info		<b>635</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>35</b>	44	23
Chromium	ppm	ASTM D5185m	>10	<b>1</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	4	0
Lead	ppm	ASTM D5185m	>25	<b>1</b>	<1	0
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>10	<b>1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>75	<b>25</b>	30	19
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	<1	2
Boron	ppm	ASTM D5185m	37	<b>&lt;1</b>	<1	0
Barium	ppm	ASTM D5185m	7	<b>&lt;1</b>	2	0
Molybdenum	ppm	ASTM D5185m	5	<b>4</b>	1	3
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	0
Magnesium	ppm	ASTM D5185m	40	<b>44</b>	60	53
Calcium	ppm	ASTM D5185m	2650	<b>3351</b>	3286	2814
Phosphorus	ppm	ASTM D5185m	1050	<b>1095</b>	1013	846
Zinc	ppm	ASTM D5185m	1075	<b>1259</b>	1187	1059
Sulfur	ppm	ASTM D5185m	5750	<b>5649</b>	4966	4701
Visc @ 40°C	cSt	ASTM D445	101	<b>95.3</b>	94.9	95.1


Viscosity @ 40°C

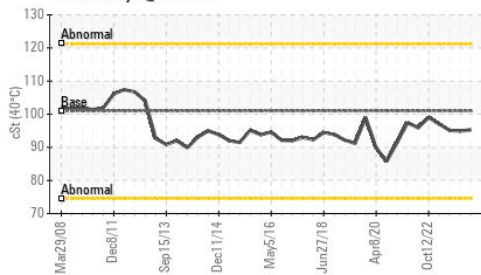


Ferrous Alloys

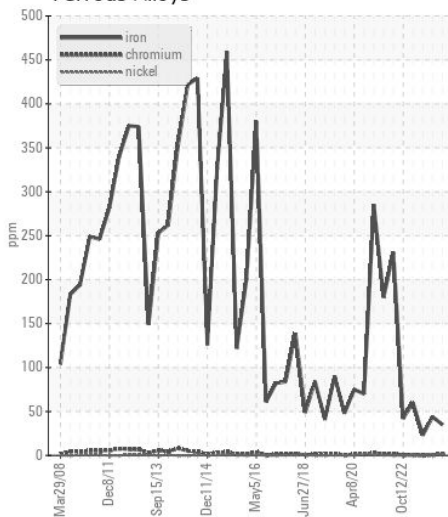

Non-ferrous Metals

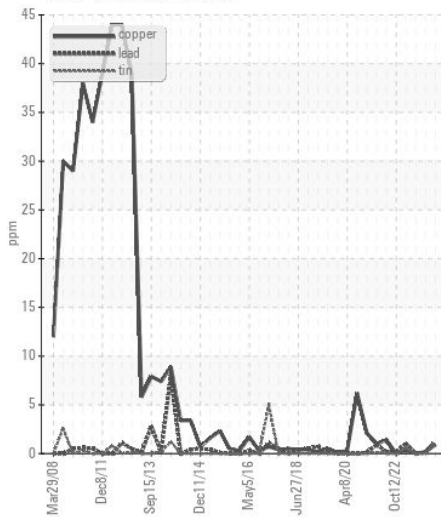

Viscosity @ 40°C

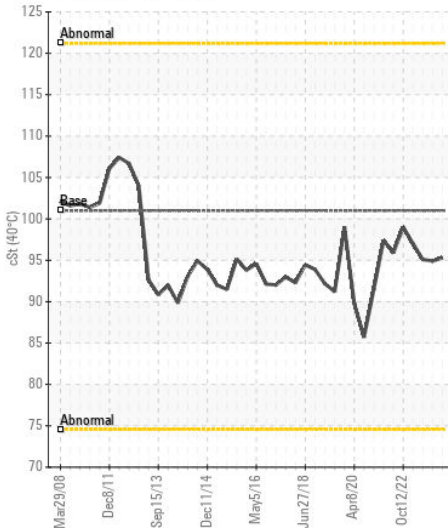

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : CL0005331  
**Lab Number** : 06159906  
**Unique Number** : 10995329  
**Test Package** : CONST  
**Received** : 24 Apr 2024  
**Tested** : 25 Apr 2024  
**Diagnosed** : 25 Apr 2024 - Wes Davis

**PEDULLA**  
 146 MCLELLAND  
 MOORESVILLE, NC  
 US 28115  
 Contact: LARRY

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: