



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
K5 CONSTRUCTION CORPORATION - HODGKINS IL

Machine Id
2028
Component
3 Conveyor Gearbox

Fluid
LEAHY WOLF SYNMASTER 75W90 (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0122067	LW0004320	LWI-K74361
Sample Date		Client Info		19 Apr 2024	11 Feb 2022	23 Apr 2018
Machine Age	hrs	Client Info		5847	5818	5331
Oil Age	hrs	Client Info		29	395	2365
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	Not Changed
Sample Status				NORMAL	NORMAL	SEVERE

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	19	11	▲ 850
Chromium	ppm	ASTM D5185m	>10	<1	0	▲ 11
Nickel	ppm	ASTM D5185m	>10	2	<1	1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m		2	0	0
Lead	ppm	ASTM D5185m		1	0	0
Copper	ppm	ASTM D5185m		1	0	11
Tin	ppm	ASTM D5185m		1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		5	4	8
Potassium	ppm	ASTM D5185m	>20	2	<1	9
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	<1	13
Boron	ppm	ASTM D5185m	328	291	330	240
Barium	ppm	ASTM D5185m	1	<1	0	2
Molybdenum	ppm	ASTM D5185m		1	<1	5
Manganese	ppm	ASTM D5185m		1	0	10
Magnesium	ppm	ASTM D5185m	1	<1	<1	2
Calcium	ppm	ASTM D5185m	7	9	6	264
Phosphorus	ppm	ASTM D5185m	1145	1290	1291	1168
Zinc	ppm	ASTM D5185m	3	18	0	120
Sulfur	ppm	ASTM D5185m	17909	25204	20514	---
Visc @ 40°C	cSt	ASTM D445	99.6	94.8	98.8	---

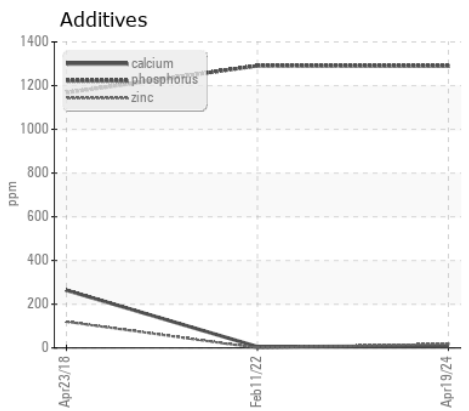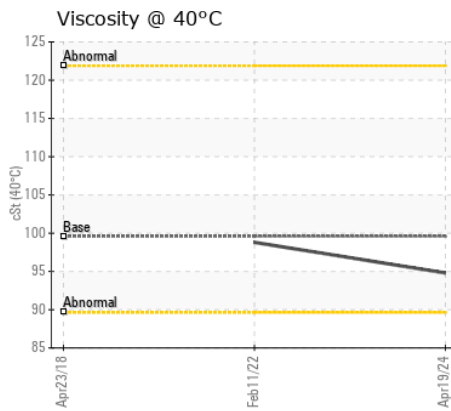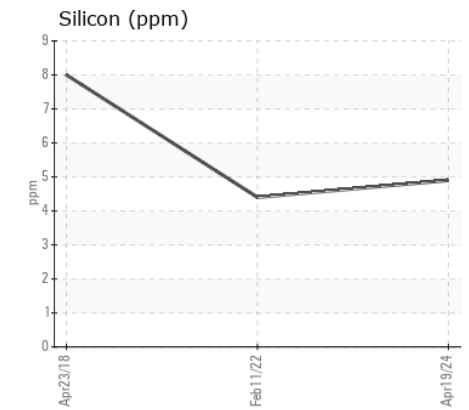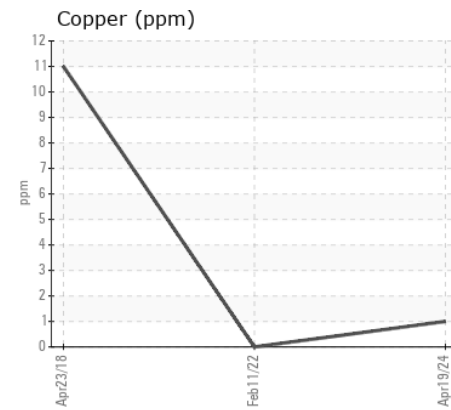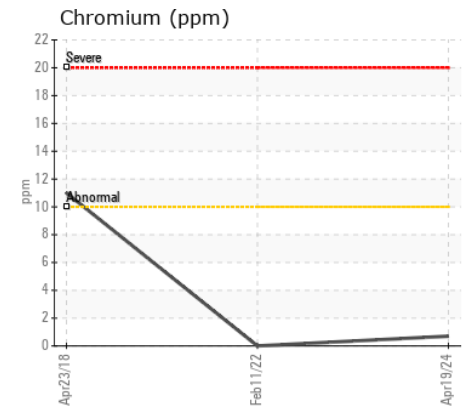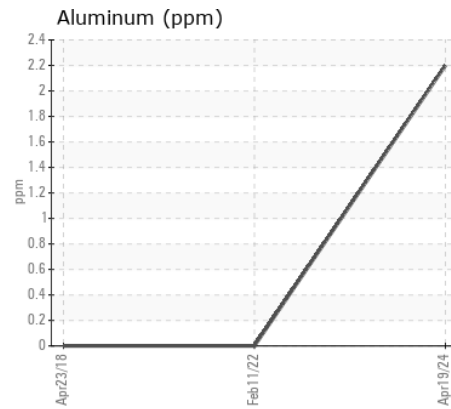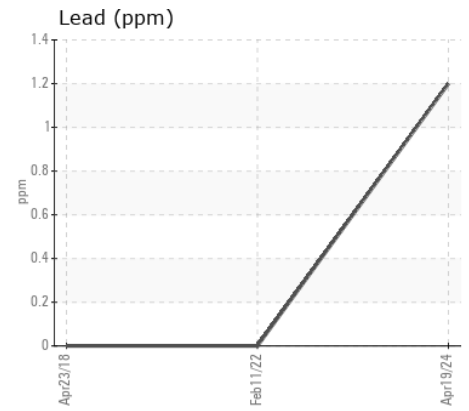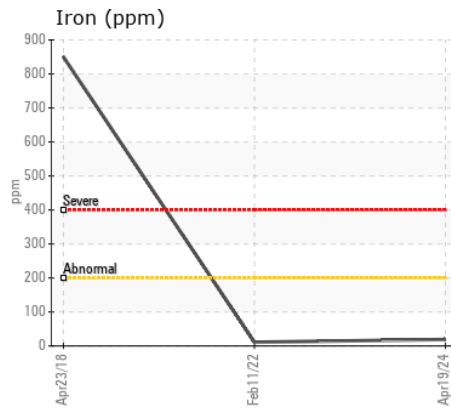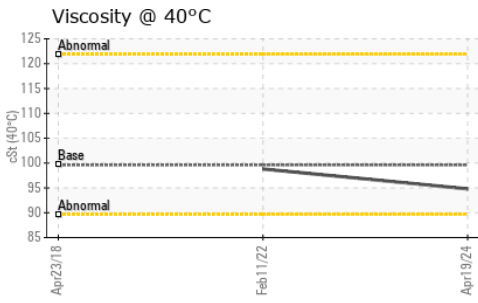

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0122067
Lab Number : 06159936
Unique Number : 10995359
Test Package : MOB 1
Received : 24 Apr 2024
Tested : 25 Apr 2024
Diagnosed : 26 Apr 2024 - Don Baldrige

K5 CONSTRUCTION CORPORATION
 6301 S EAST AVENUE
 HODGKINS, IL
 US 60525
 Contact: FRANCISCO MUNOZ
 franciscom@k-five.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: