



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ATTENTION</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**KOMATSU TH-43**  
Component  
**Hydraulic System**  
Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

**RECOMMENDATION**

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

**WEAR**

All component wear rates are normal.










**CONTAMINATION**

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>CL0005377</b>	---	---
Sample Date		Client Info		<b>18 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>3340</b>	---	---
Oil Age	hrs	Client Info		<b>3340</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Changd</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>ATTENTION</b>	---	---
Iron	ppm	ASTM D5185m	>20	<b>8</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>10	<b>4</b>	---	---
Copper	ppm	ASTM D5185m	>75	<b>13</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silicon	ppm	ASTM D5185m	>20	<b>6</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Particles >4µm		ASTM D7647	>5000	<b>9689</b>	---	---
Particles >6µm		ASTM D7647	>1300	<b>939</b>	---	---
Particles >14µm		ASTM D7647	>160	<b>42</b>	---	---
Particles >21µm		ASTM D7647	>40	<b>12</b>	---	---
Particles >38µm		ASTM D7647	>10	<b>0</b>	---	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>20/17/13</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---
Sodium	ppm	ASTM D5185m		<b>0</b>	---	---
Boron	ppm	ASTM D5185m	5	<b>2</b>	---	---
Barium	ppm	ASTM D5185m	5	<b>1</b>	---	---
Molybdenum	ppm	ASTM D5185m	5	<b>2</b>	---	---
Manganese	ppm	ASTM D5185m		<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m	25	<b>17</b>	---	---
Calcium	ppm	ASTM D5185m	200	<b>306</b>	---	---
Phosphorus	ppm	ASTM D5185m	300	<b>301</b>	---	---
Zinc	ppm	ASTM D5185m	370	<b>349</b>	---	---
Sulfur	ppm	ASTM D5185m	2500	<b>1224</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	<b>0.43</b>	---	---
Visc @ 40°C	cSt	ASTM D445	46	<b>42.1</b>	---	---

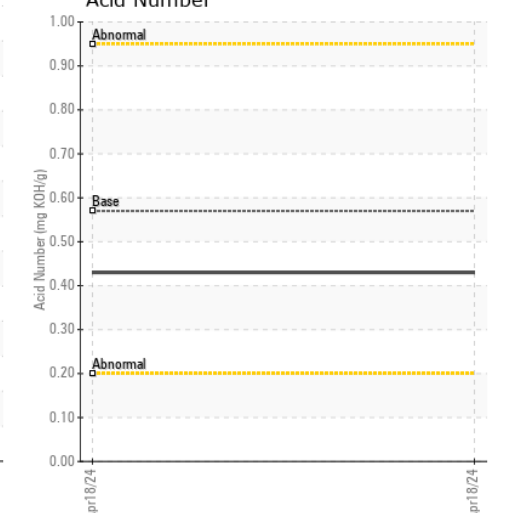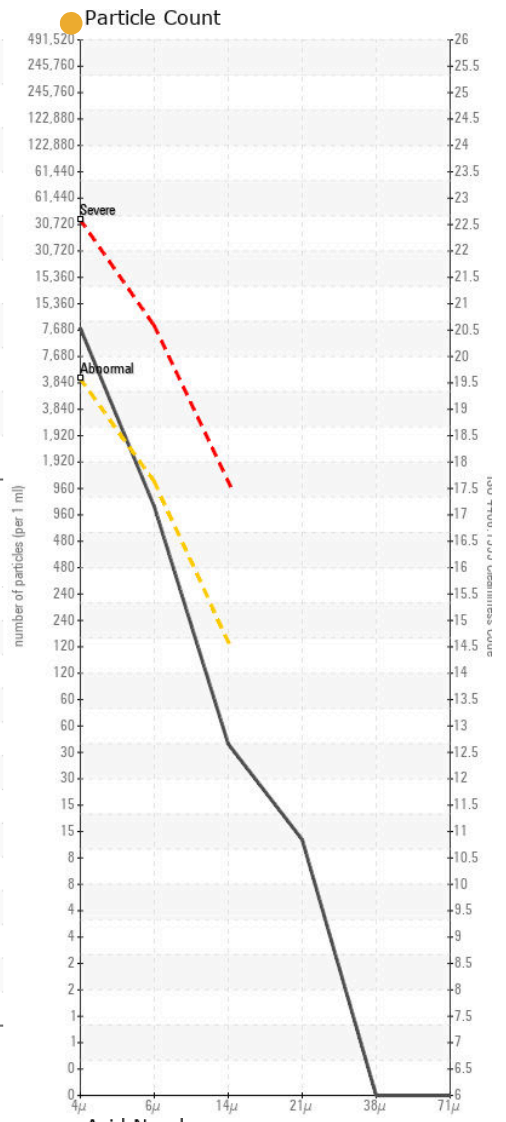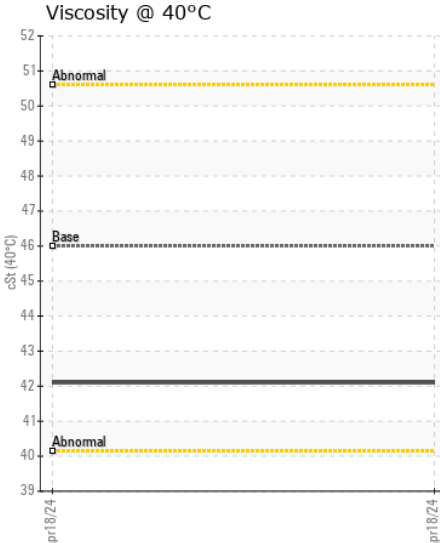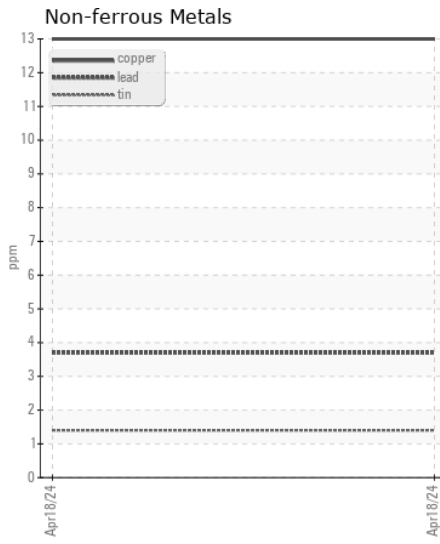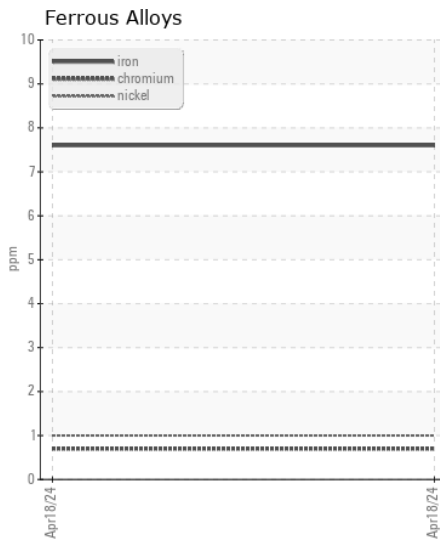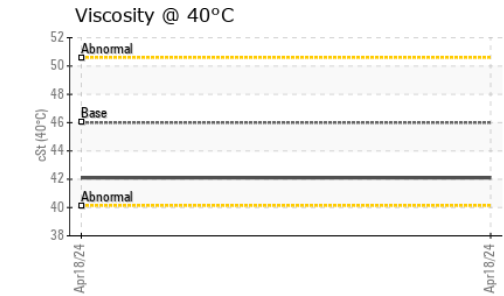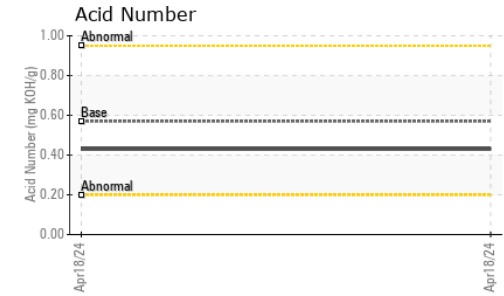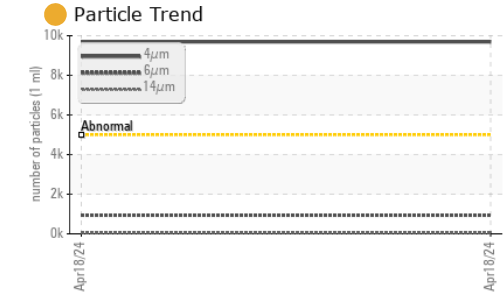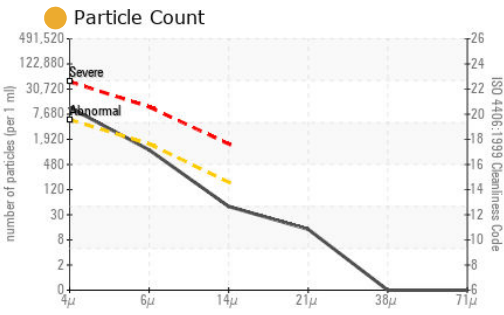

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : CL0005377  
 Lab Number : 06159951  
 Unique Number : 10995374  
 Test Package : CONST

Received : 24 Apr 2024  
 Tested : 25 Apr 2024  
 Diagnosed : 25 Apr 2024 - Wes Davis

**PEDULLA**  
 146 MCLELLAND  
 MOORESVILLE, NC  
 US 28115  
 Contact: LARRY

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: