



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**UH-1H N911KP**  
 Component  
**Turbine**  
 Fluid  
**{not provided} (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GF0001489</b>	---	---
Sample Date		Client Info		<b>29 Mar 2024</b>	---	---
TSN	hrs	Client Info		<b>3999</b>	---	---
TSO	hrs	Client Info		<b>3999</b>	---	---
Oil Age	hrs	Client Info		<b>2937</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>15	<b>0</b>	---	---
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>2	<b>1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Lead	ppm	ASTM D5185m		<b>1</b>	---	---
Copper	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m	>5	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>15	<b>5</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	---	---
Water		WC Method	>0.03	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.03	<b>NEG</b>	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	---	---
Boron	ppm	ASTM D5185m		<b>0</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185m		<b>4</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>2675</b>	---	---
Zinc	ppm	ASTM D5185m		<b>0</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>0</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>25.3</b>	---	---

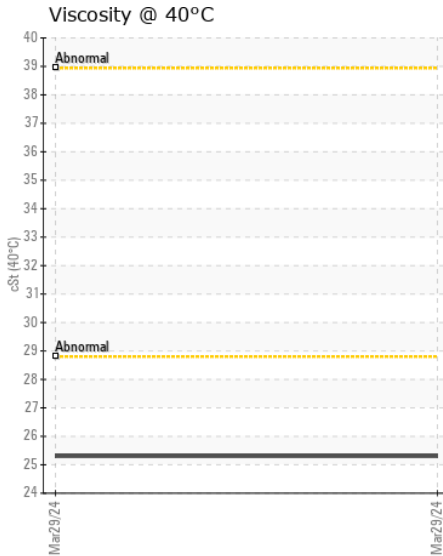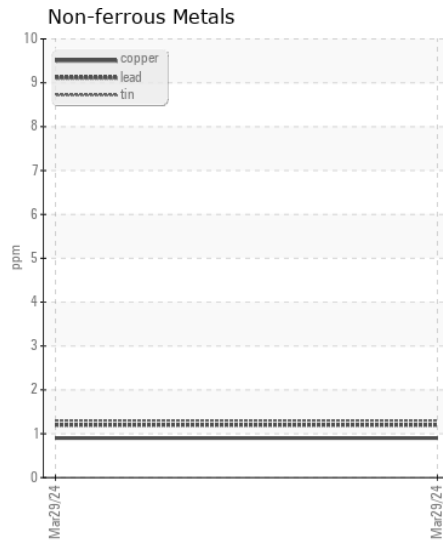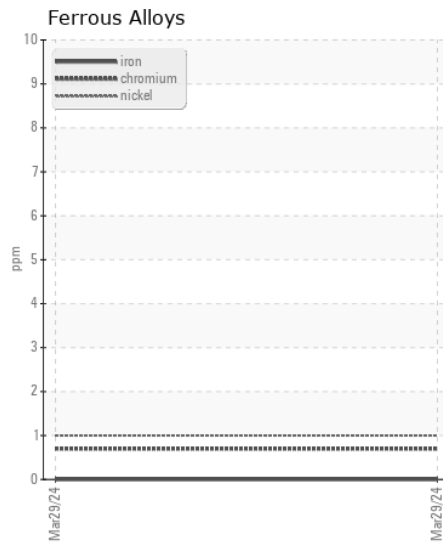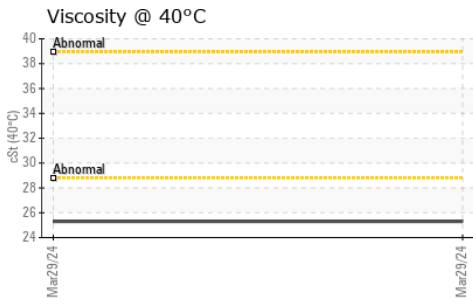

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : GF0001489

**Lab Number** : 06159958

**Unique Number** : 10995381

**Test Package** : AVI 1

**Received** : 24 Apr 2024

**Tested** : 25 Apr 2024

**Diagnosed** : 26 Apr 2024 - Don Baldrige

**ROTORCRAFT SUPPORT INC**

67 D STREET

FILMORE, CA

US 93015

Contact: PHIL DIFIORE

phil@rotorcrafternsupport.com

T: (818)997-7667

F: (818)997-1513

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)