



WEAR CHECK

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
174
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION


Elemental level of silicon (Si) above normal indicating ingress of seal material.

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC06160028	WC06160025	---
Sample Date		Client Info		24 Apr 2024	24 Apr 2024	---
Machine Age	mls	Client Info		759188	759188	---
Oil Age	mls	Client Info		0	0	---
Filter Age	mls	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				ABNORMAL	---	---
Iron	ppm	ASTM D5185m	>100	74	67	---
Chromium	ppm	ASTM D5185m	>20	2	<1	---
Nickel	ppm	ASTM D5185m	>4	0	0	---
Titanium	ppm	ASTM D5185m		85	2	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	3	3	---
Lead	ppm	ASTM D5185m	>40	6	0	---
Copper	ppm	ASTM D5185m	>330	2	16	---
Tin	ppm	ASTM D5185m	>15	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>25	▲ 29	23	---
Potassium	ppm	ASTM D5185m	>20	2	▲ 124	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	1.2	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	10.3	3.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.5	▲ 31.7	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Sodium	ppm	ASTM D5185m	>216	5	21	---
Boron	ppm	ASTM D5185m	250	47	29	---
Barium	ppm	ASTM D5185m	10	0	<1	---
Molybdenum	ppm	ASTM D5185m	100	14	<1	---
Manganese	ppm	ASTM D5185m		1	2	---
Magnesium	ppm	ASTM D5185m	450	447	33	---
Calcium	ppm	ASTM D5185m	3000	2075	3296	---
Phosphorus	ppm	ASTM D5185m	1150	1097	884	---
Zinc	ppm	ASTM D5185m	1350	1341	877	---
Sulfur	ppm	ASTM D5185m	4250	4555	2925	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.3	▲ 29.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.1	16.6	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.9	11.0	---


▲ Silicon (ppm)

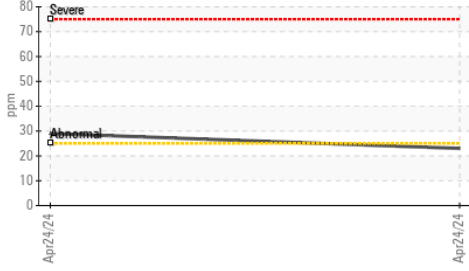


Ferrous Alloys

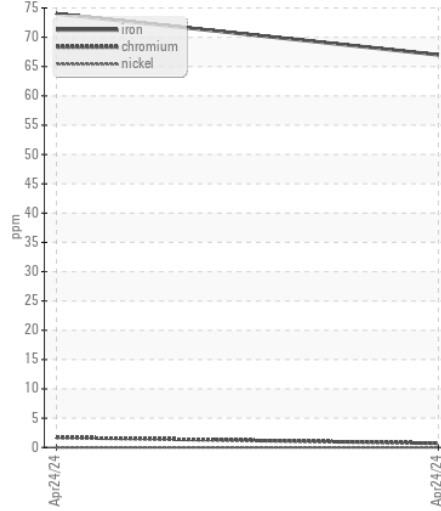


FT-IR (Direct Trend)

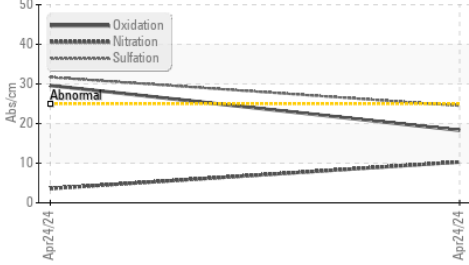


Non-ferrous Metals

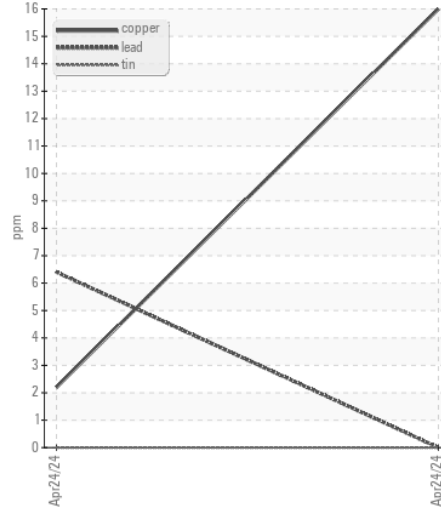


Base Number

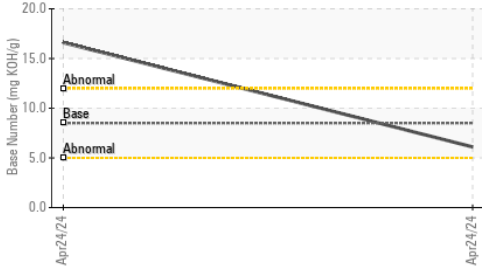


Viscosity @ 100°C

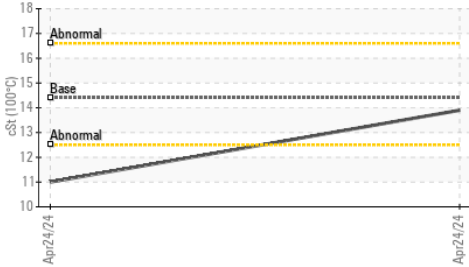

Viscosity @ 100°C

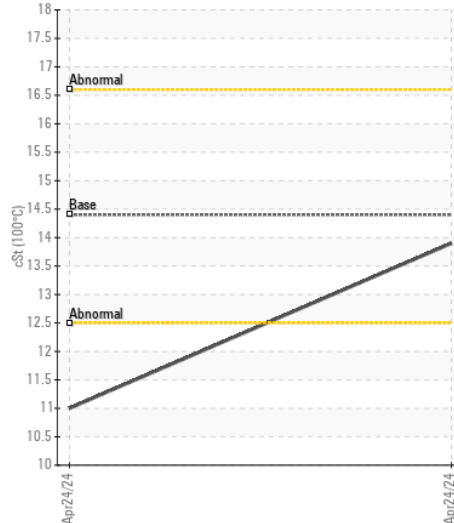

Base Number

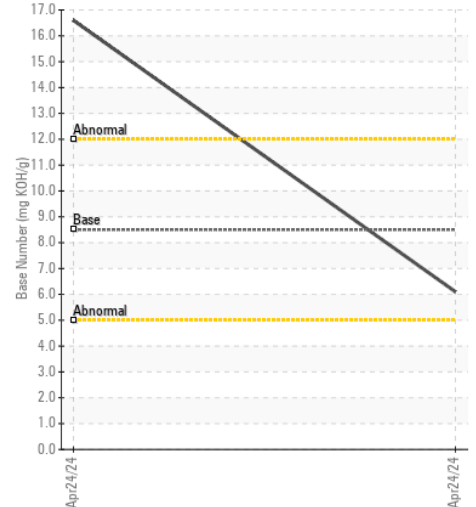

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC06160028

Lab Number : 06160028

Unique Number : 10995451

Test Package : FLEET

Received : 25 Apr 2024

Tested : 25 Apr 2024

Diagnosed : 26 Apr 2024 - Sean Felton

LONGIE SONGER

1820 SHELTON MISSION RD

GREENEVILLE, TN

US 37743

Contact: LONGIE SONGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: