



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

(75593A)

Machine Id

PETERBILT ASL-13

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0875516	WC0875553	---
Sample Date		Client Info		09 Apr 2024	04 Mar 2024	---
Machine Age	hrs	Client Info		2191	1866	---
Oil Age	hrs	Client Info		600	600	---
Filter Age	hrs	Client Info		0	600	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	5	9	---
Chromium	ppm	ASTM D5185m	>20	0	1	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	6	9	---
Lead	ppm	ASTM D5185m	>40	0	<1	---
Copper	ppm	ASTM D5185m	>330	0	4	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	3	5	---
Potassium	ppm	ASTM D5185m	>20	12	23	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	7.0	6.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.8	17.3	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	0	0	---
Boron	ppm	ASTM D5185m	250	7	10	---
Barium	ppm	ASTM D5185m	10	0	<1	---
Molybdenum	ppm	ASTM D5185m	100	68	80	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m	450	856	793	---
Calcium	ppm	ASTM D5185m	3000	1196	1164	---
Phosphorus	ppm	ASTM D5185m	1150	1070	1082	---
Zinc	ppm	ASTM D5185m	1350	1265	1150	---
Sulfur	ppm	ASTM D5185m	4250	3623	3294	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.4	13.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.3	8.8	---
Visc @ 100°C	cSt	ASTM D445	14.4	14.2	14.0	---

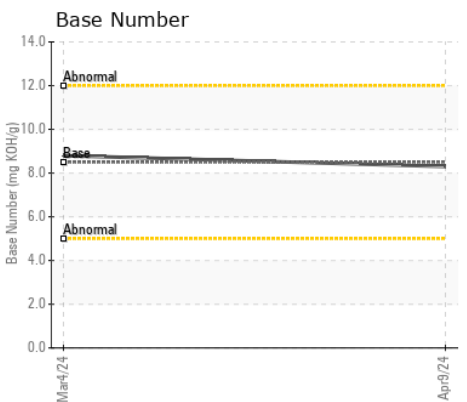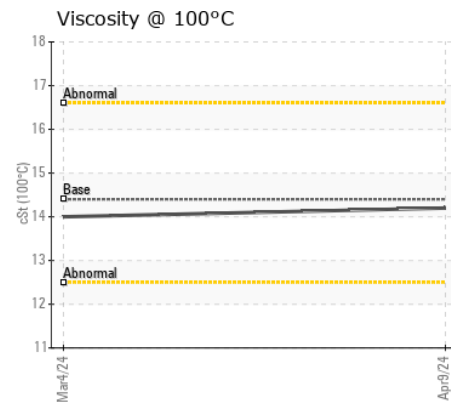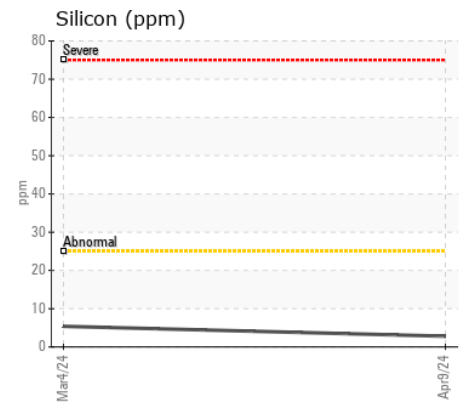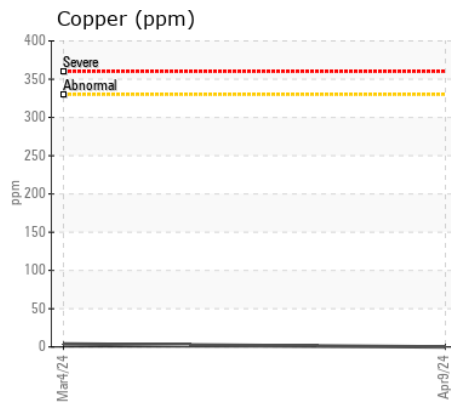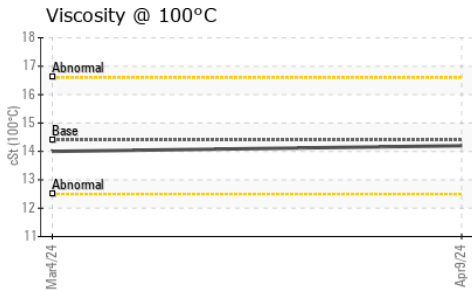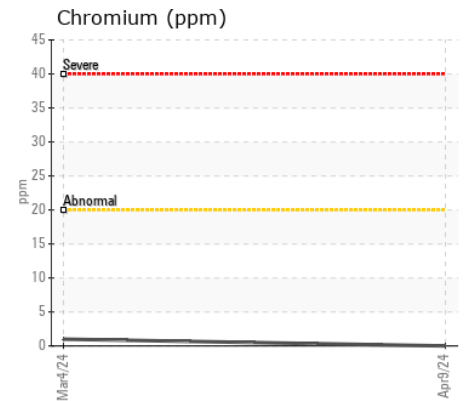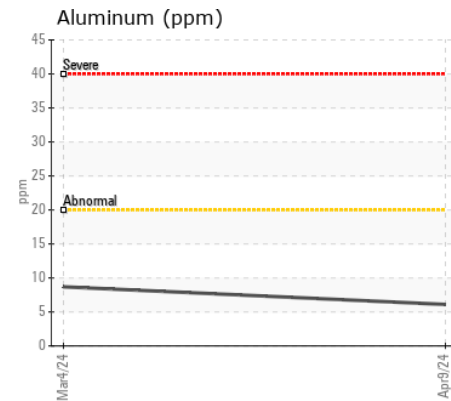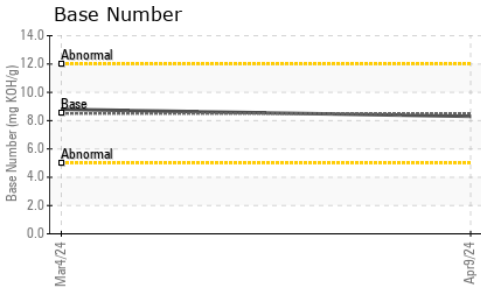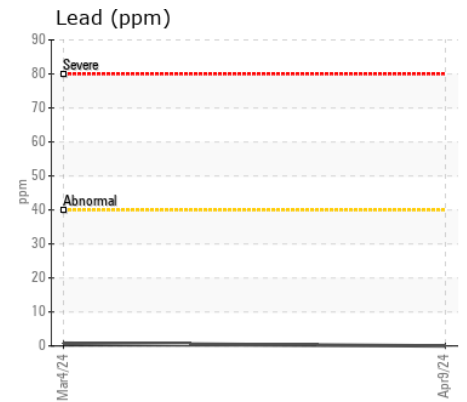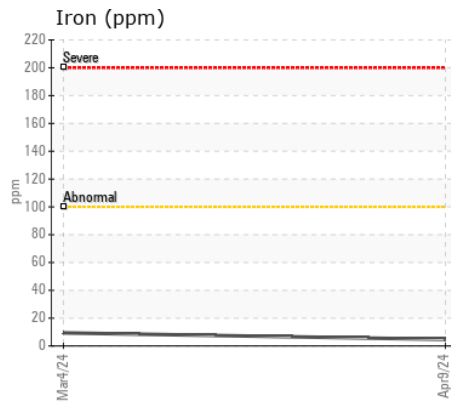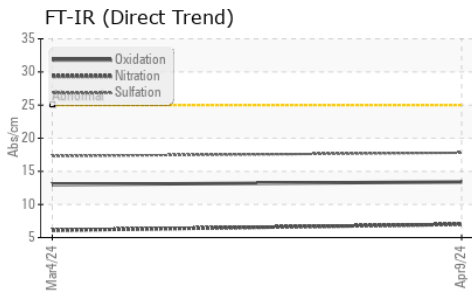

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0875516 **Received** : 25 Apr 2024
Lab Number : 06160178 **Tested** : 26 Apr 2024
Unique Number : 10995601 **Diagnosed** : 26 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

OAKRIDGE WASTE
 307 WHITE ST
 DANBURY, CT
 US 06810

Contact: CHRIS CONTI
 chris.conti@oakridgewaste.com

T:
 F: