



WEAR CHECK

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
GEN 2
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (4 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KL0011521	KL0011672	KL0011676
Sample Date		Client Info		12 Apr 2024	11 Mar 2024	12 Feb 2024
Machine Age	hrs	Client Info		1870	1320	1040
Oil Age	hrs	Client Info		250	250	290
Filter Age	hrs	Client Info		250	250	290
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	8	9	7
Chromium	ppm	ASTM D5185m	>20	1	<1	0
Nickel	ppm	ASTM D5185m	>4	1	<1	0
Titanium	ppm	ASTM D5185m		2	2	<1
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	2	1	<1
Lead	ppm	ASTM D5185m	>40	1	<1	0
Copper	ppm	ASTM D5185m	>330	1	3	8
Tin	ppm	ASTM D5185m	>15	1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	10	9
Potassium	ppm	ASTM D5185m	>20	5	4	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	7.7	7.5	7.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.9	17.8	18.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	<1	3
Boron	ppm	ASTM D5185m		91	108	87
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		5	5	2
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		720	739	677
Calcium	ppm	ASTM D5185m		1337	1400	1301
Phosphorus	ppm	ASTM D5185m	1360	659	774	649
Zinc	ppm	ASTM D5185m	1480	802	848	672
Sulfur	ppm	ASTM D5185m		3116	3180	2766
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.9	12.9	13.2
Base Number (BN)	mg KOH/g	ASTM D2896	12.2	7.7	8.2	8.2
Visc @ 100°C	cSt	ASTM D445	15.1	12.9	12.9	13.0

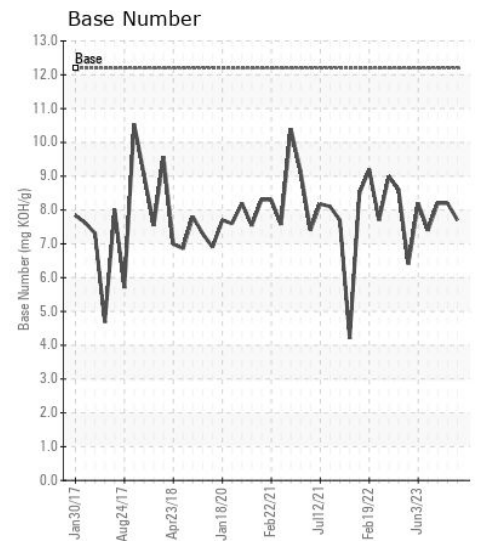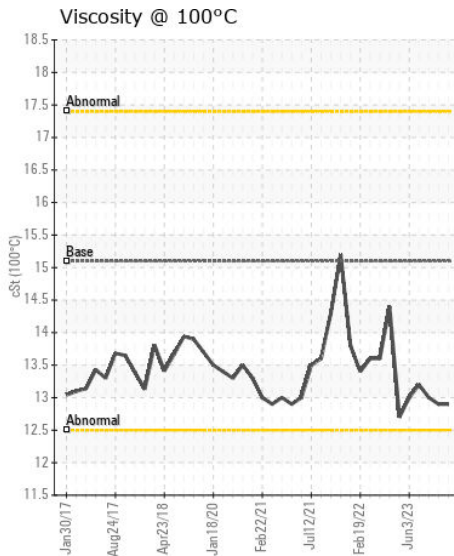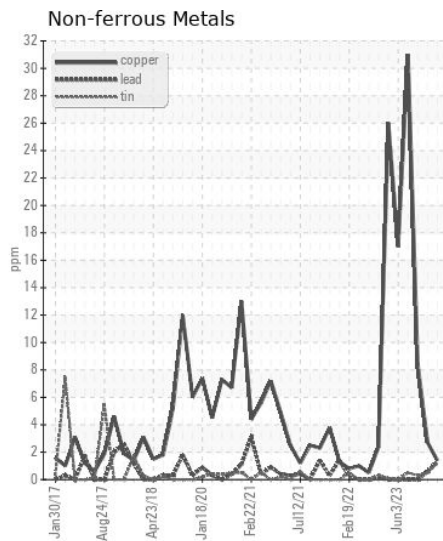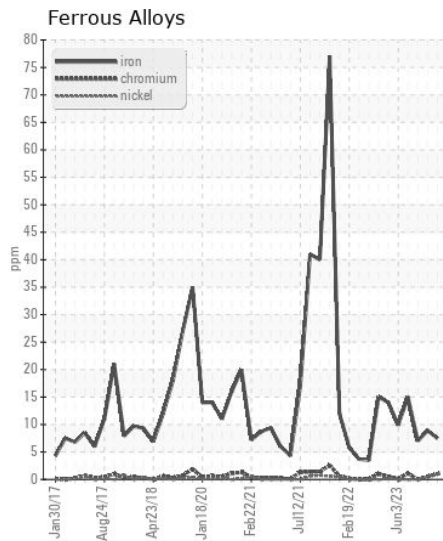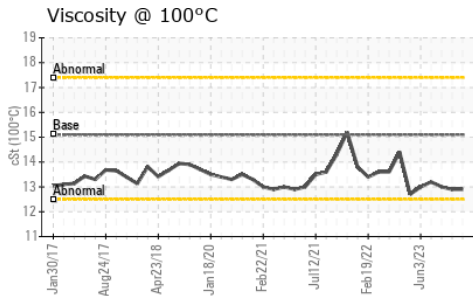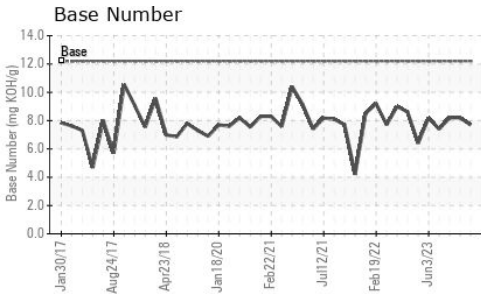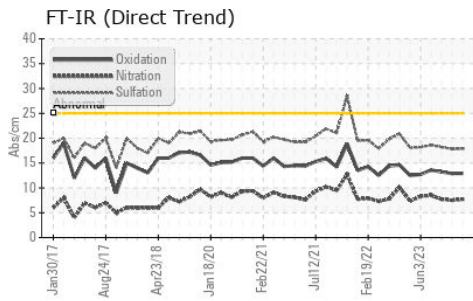

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0011521
Lab Number : 06160197
Unique Number : 10995620
Test Package : FLEET
Received : 25 Apr 2024
Tested : 26 Apr 2024
Diagnosed : 26 Apr 2024 - Wes Davis

JUSTIN JOHNSON
 222 BRUSH TRAIL
 EDDYVILLE, OR
 US 97393
 Contact: JUSTIN JOHNSON
 capelookout1@gmail.com
 T: (541)272-2739
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)