



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 250D 638351
Component
Hydraulic System
Fluid
{not provided} (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0170707	---	---
Sample Date		Client Info		24 Apr 2024	---	---
Machine Age	hrs	Client Info		6727	---	---
Oil Age	hrs	Client Info		500	---	---
Filter Age	hrs	Client Info		500	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				ABNORMAL	---	---

WEAR

The chromium level is abnormal. All other component wear rates are normal.

PQ		ASTM D8184	>50	24	---	---
Iron	ppm	ASTM D5185m	>23	22	---	---
Chromium	ppm	ASTM D5185m	>9	▲ 14	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>9	4	---	---
Lead	ppm	ASTM D5185m	>28	0	---	---
Copper	ppm	ASTM D5185m	>51	8	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	9	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.075	NEG	---	---
Particles >4µm		ASTM D7647	>80000	70596	---	---
Particles >6µm		ASTM D7647	>20000	3362	---	---
Particles >14µm		ASTM D7647	>640	16	---	---
Particles >21µm		ASTM D7647	>160	6	---	---
Particles >38µm		ASTM D7647	>40	1	---	---
Particles >71µm		ASTM D7647	>10	0	---	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	23/19/11	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	6	---	---
Boron	ppm	ASTM D5185m		77	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		33	---	---
Calcium	ppm	ASTM D5185m		1213	---	---
Phosphorus	ppm	ASTM D5185m		877	---	---
Zinc	ppm	ASTM D5185m		711	---	---
Sulfur	ppm	ASTM D5185m		2027	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.09	---	---
Visc @ 40°C	cSt	ASTM D445		42.0	---	---

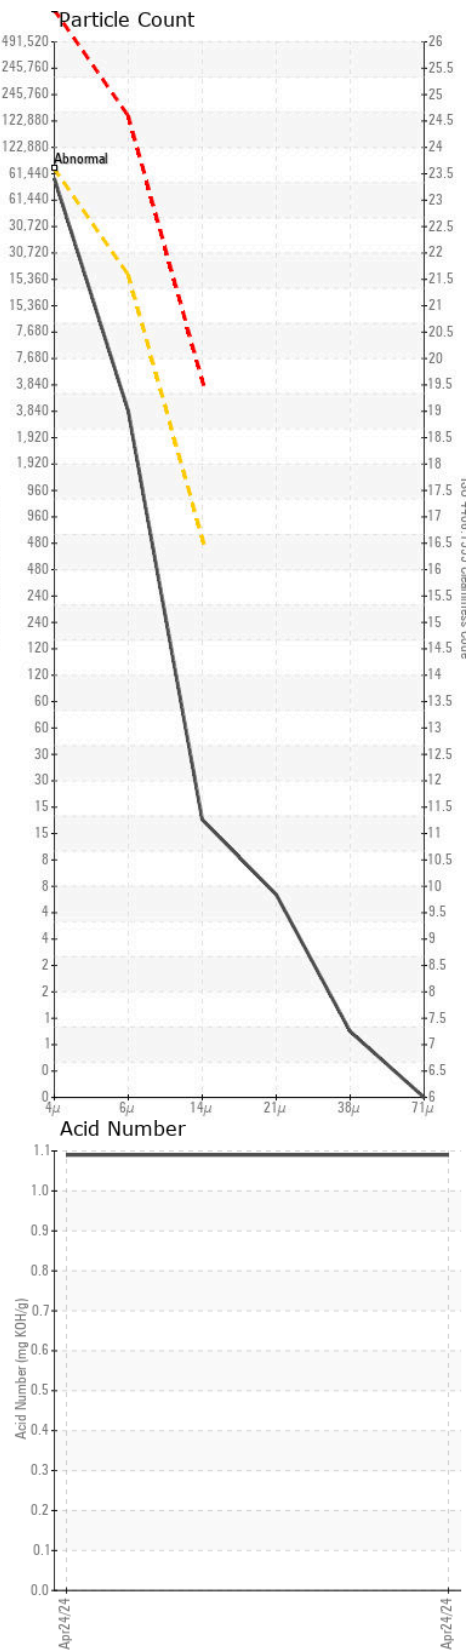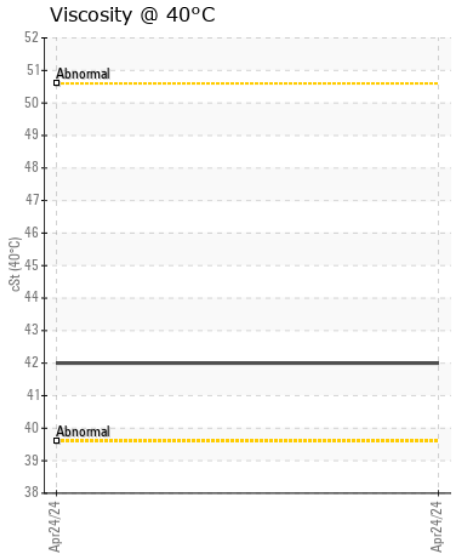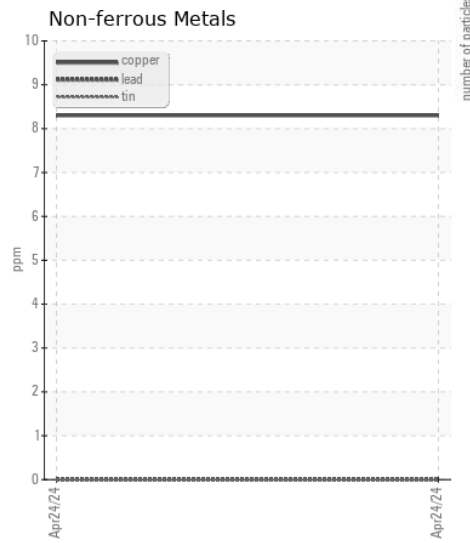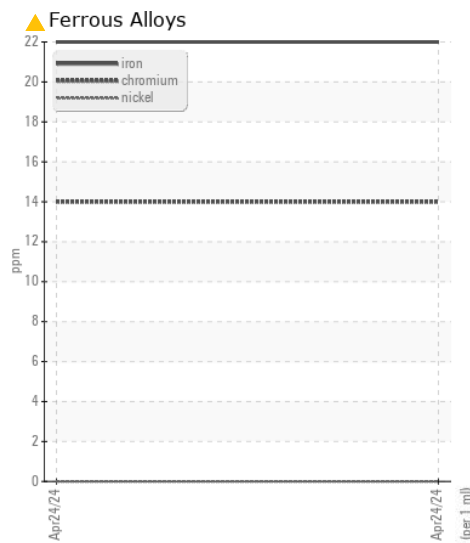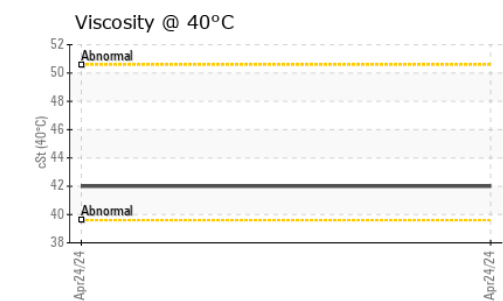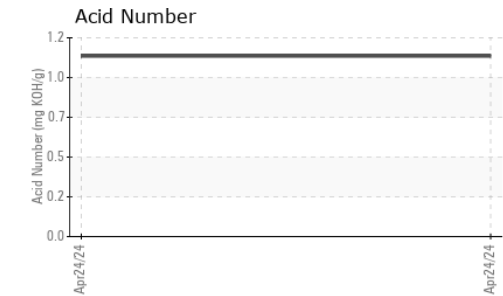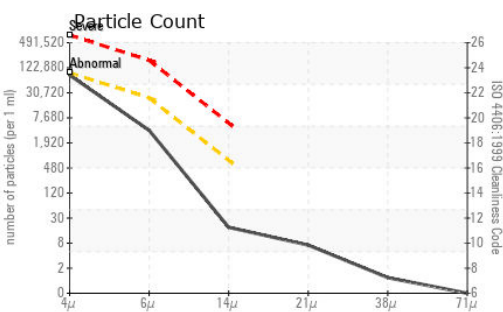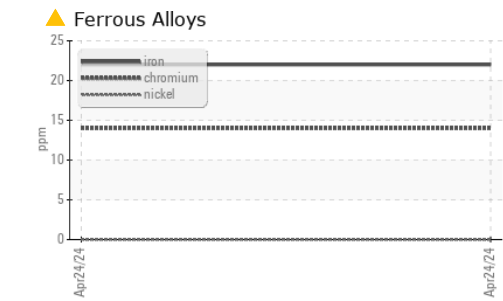

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0170707 **Received** : 25 Apr 2024
Lab Number : 06160264 **Tested** : 26 Apr 2024
Unique Number : 10995687 **Diagnosed** : 26 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - RICHLANDS
 450 FRONT ST
 RICHLANDS, VA
 US 24641
 Contact: RONNIE MITCHELL
 ronnie.mitchell@jre.com
 T: (540)380-2011
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)