



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Machine Id
CATERPILLAR 299D3 SL8301 (S/N JDY904881)
 Component
Left Final Drive
 Fluid
DURALENE Fleet Gear Syn 75W90 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0035672	---	---
Sample Date		Client Info		21 Apr 2024	---	---
Machine Age	hrs	Client Info		1069	---	---
Oil Age	hrs	Client Info		1069	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

Gear wear is indicated. All other metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>800	▲ 1383	---	---
Chromium	ppm	ASTM D5185m	>10	▲ 21	---	---
Nickel	ppm	ASTM D5185m	>5	3	---	---
Titanium	ppm	ASTM D5185m	>15	1	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>75	8	---	---
Lead	ppm	ASTM D5185m	>10	2	---	---
Copper	ppm	ASTM D5185m	>75	35	---	---
Tin	ppm	ASTM D5185m	>8	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	27	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The oil viscosity is higher than normal. The AN level is acceptable for this fluid.

Sodium	ppm	ASTM D5185m		12	---	---
Boron	ppm	ASTM D5185m		101	---	---
Barium	ppm	ASTM D5185m		9	---	---
Molybdenum	ppm	ASTM D5185m		1	---	---
Manganese	ppm	ASTM D5185m		13	---	---
Magnesium	ppm	ASTM D5185m		3	---	---
Calcium	ppm	ASTM D5185m		15	---	---
Phosphorus	ppm	ASTM D5185m		2091	---	---
Zinc	ppm	ASTM D5185m		50	---	---
Sulfur	ppm	ASTM D5185m		37176	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		2.72	---	---
Visc @ 40°C	cSt	ASTM D445		● 185	---	---

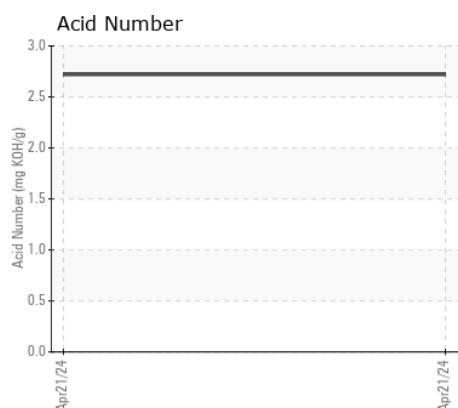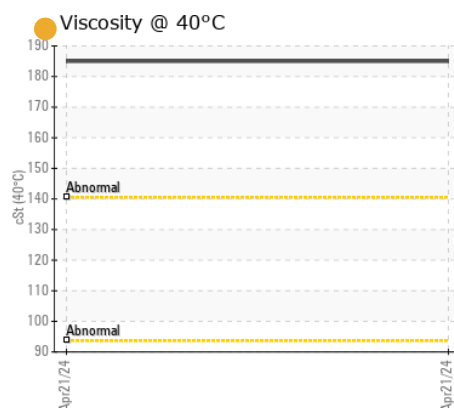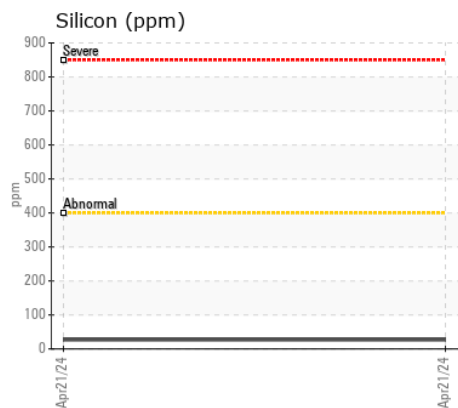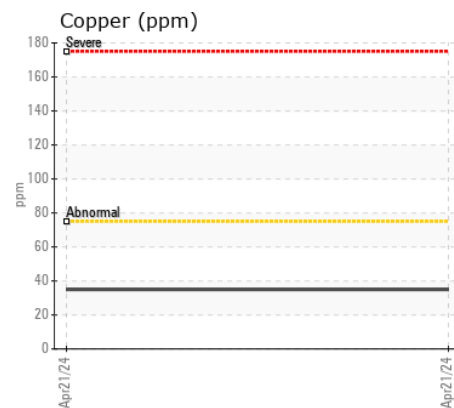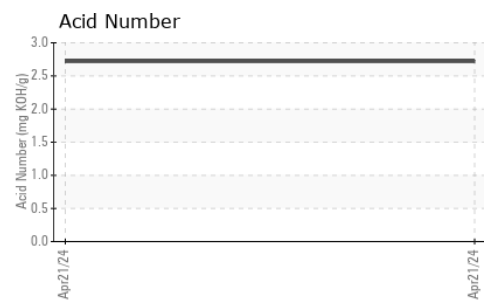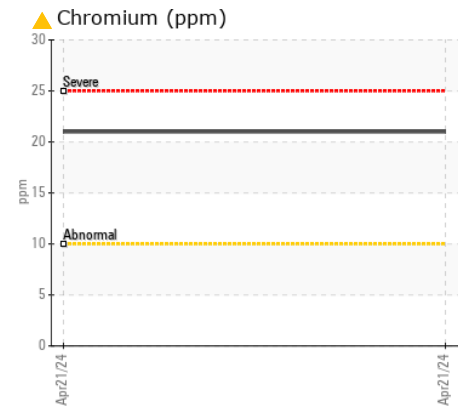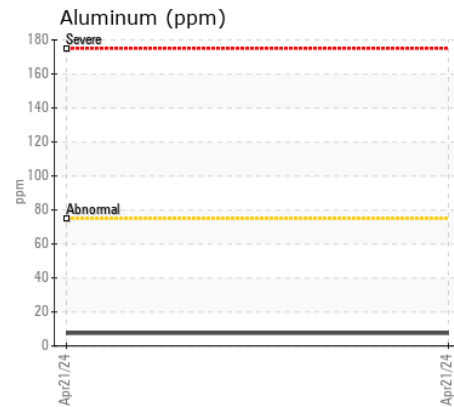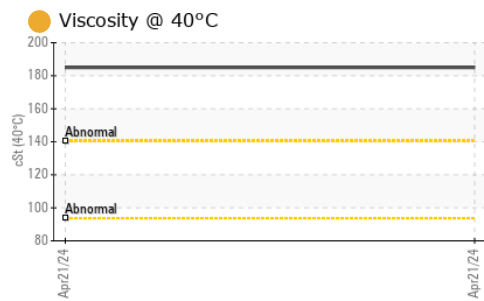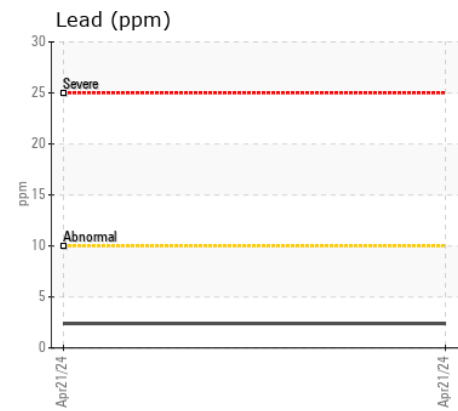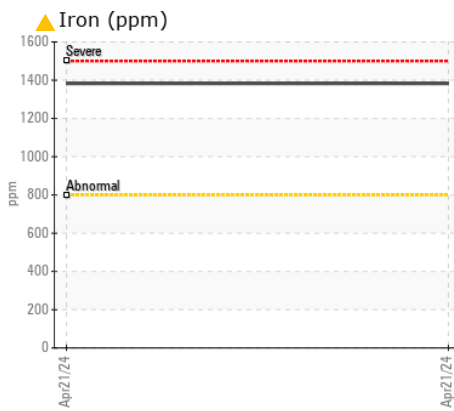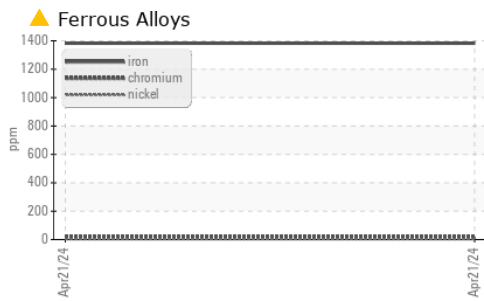

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0035672
Lab Number : 06160561
Unique Number : 10995984
Test Package : MOB 2
Received : 25 Apr 2024
Tested : 26 Apr 2024
Diagnosed : 27 Apr 2024 - Don Baldrige

COMER CONSTRUCTION
 2100 SLADE LANE
 FOREST HILL, MD
 US 21050
 Contact: RANDY SLADE
 rslade@comerconstruction.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)