



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 460P 1DW460PAAPFB06454
 Component
Center Differential
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0212429	JR0209579	JR0197636
Sample Date		Client Info		24 Apr 2024	26 Mar 2024	16 Jan 2024
Machine Age	hrs	Client Info		1988	1870	1479
Oil Age	hrs	Client Info		1988	1870	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		19	18	13
Iron	ppm	ASTM D5185m	>500	23	43	1
Chromium	ppm	ASTM D5185m	>10	<1	<1	0
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>25	2	2	<1
Lead	ppm	ASTM D5185m	>25	11	19	0
Copper	ppm	ASTM D5185m	>100	27	50	<1
Tin	ppm	ASTM D5185m	>10	3	5	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	6	6	5
Potassium	ppm	ASTM D5185m	>20	2	3	0
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	3	1
Boron	ppm	ASTM D5185m	6	2	4	0
Barium	ppm	ASTM D5185m	0	<1	3	0
Molybdenum	ppm	ASTM D5185m	0	3	4	<1
Manganese	ppm	ASTM D5185m		1	2	0
Magnesium	ppm	ASTM D5185m	145	100	100	102
Calcium	ppm	ASTM D5185m	3570	3423	3553	3391
Phosphorus	ppm	ASTM D5185m	1290	1130	1078	1041
Zinc	ppm	ASTM D5185m	1640	1267	1277	1179
Sulfur	ppm	ASTM D5185m		4327	3910	3823
Visc @ 40°C	cSt	ASTM D445	57.0	53.9	50.2	58.1

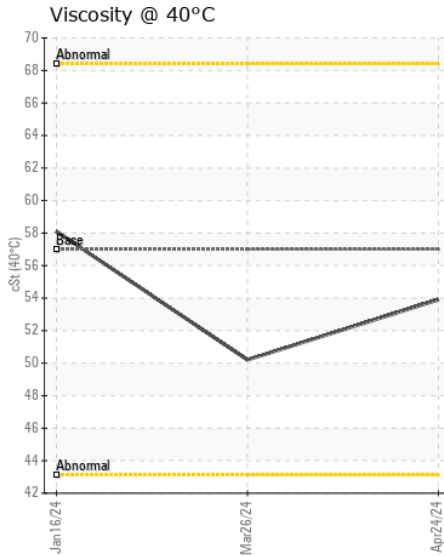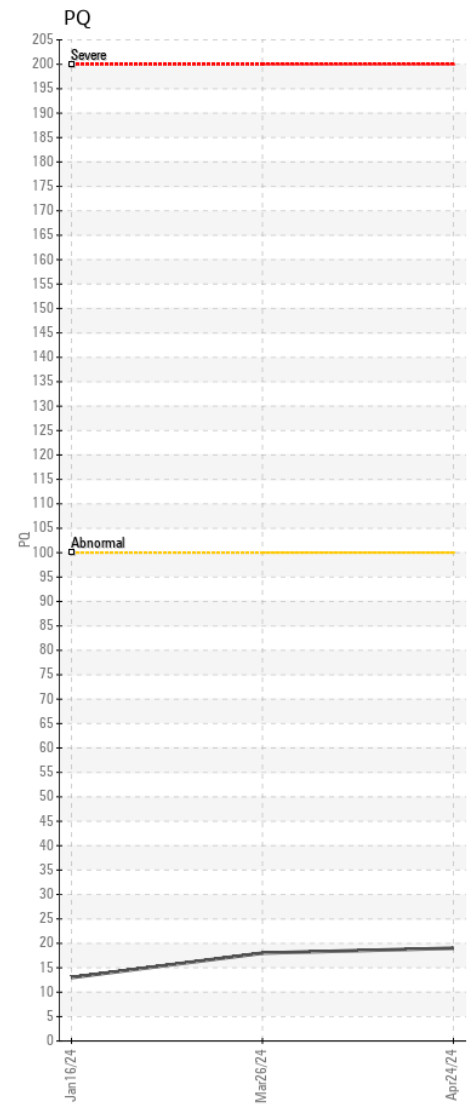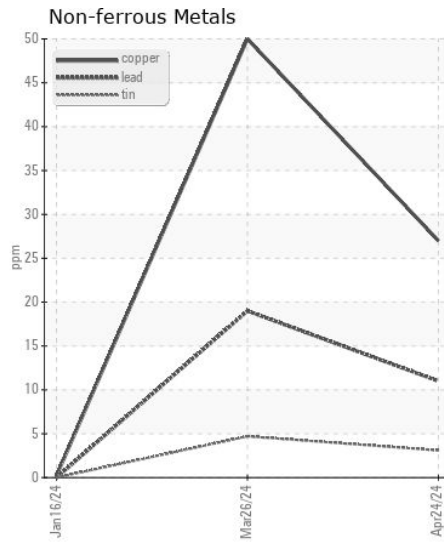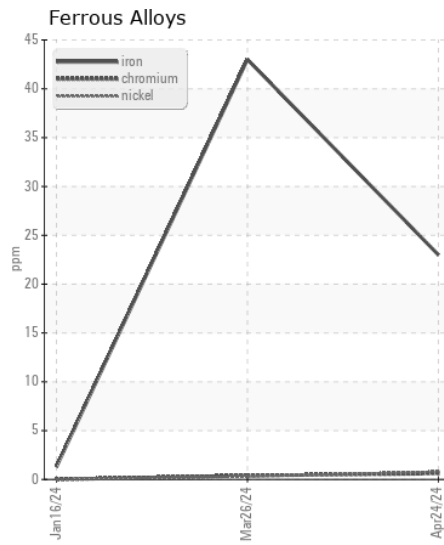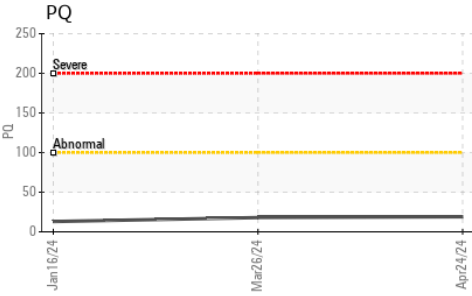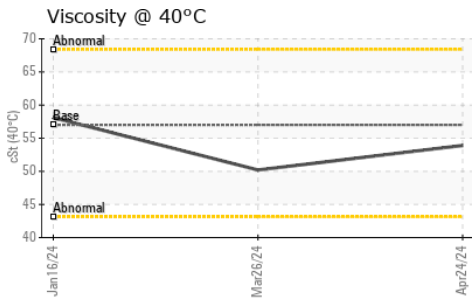

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0212429 **Received** : 25 Apr 2024
Lab Number : 06160624 **Tested** : 26 Apr 2024
Unique Number : 10996047 **Diagnosed** : 27 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529
 Contact: JOHN GUASCHINO
 john.guaschino@jamesriverequipment.com
 T:
 F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)