



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 350P 1FF350PAJPF000941
 Component
Right Final Drive
 Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0212383	JR0197324	---
Sample Date		Client Info		23 Apr 2024	05 Jan 2024	---
Machine Age	hrs	Client Info		975	537	---
Oil Age	hrs	Client Info		975	537	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		200	173	---
Iron	ppm	ASTM D5185m	>500	259	257	---
Chromium	ppm	ASTM D5185m	>10	4	3	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	0	0	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>50	0	0	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	15	12	---
Potassium	ppm	ASTM D5185m	>20	0	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	LIGHT	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	0	<1	---
Boron	ppm	ASTM D5185m	400	93	94	---
Barium	ppm	ASTM D5185m	200	3	1	---
Molybdenum	ppm	ASTM D5185m	12	0	0	---
Manganese	ppm	ASTM D5185m		5	4	---
Magnesium	ppm	ASTM D5185m	12	2	0	---
Calcium	ppm	ASTM D5185m	150	19	10	---
Phosphorus	ppm	ASTM D5185m	1650	544	555	---
Zinc	ppm	ASTM D5185m	125	14	2	---
Sulfur	ppm	ASTM D5185m	22500	17028	15861	---
Visc @ 40°C	cSt	ASTM D445	143	187	188	---

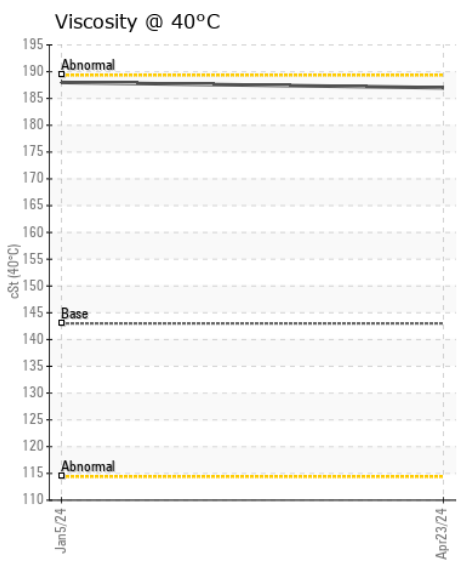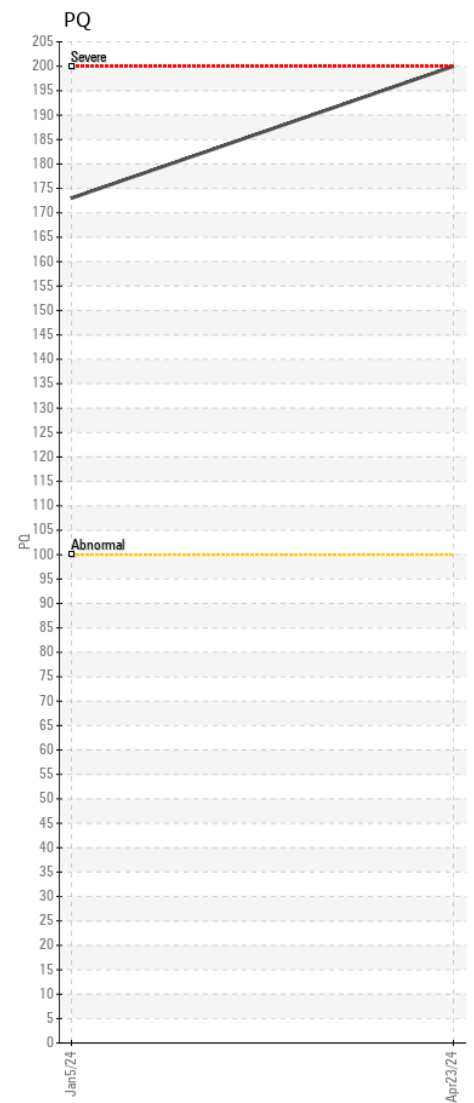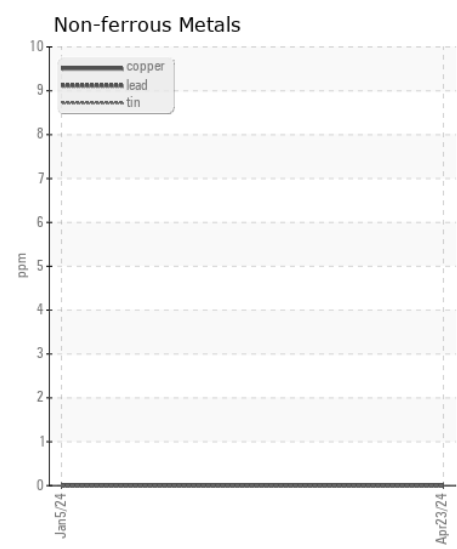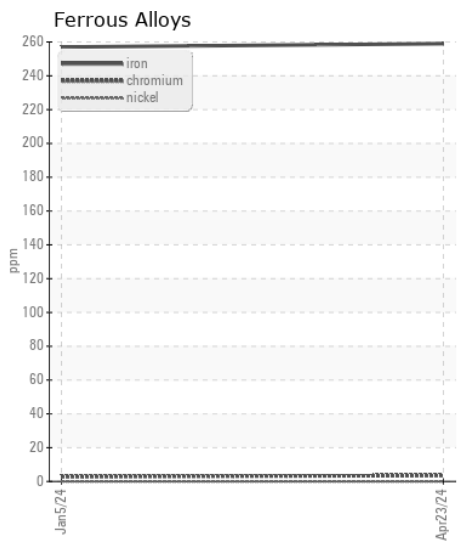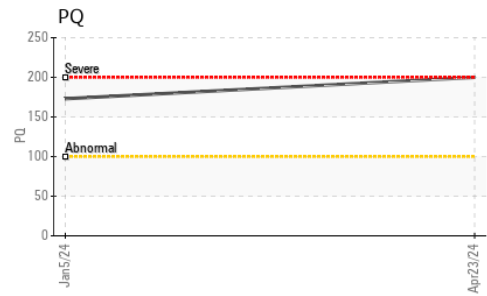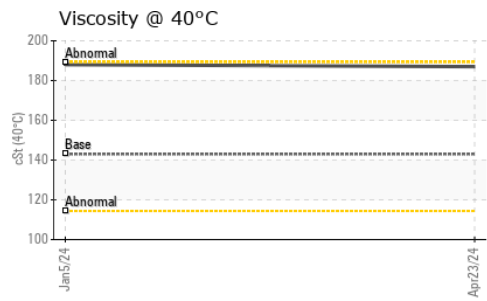

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0212383 **Received** : 25 Apr 2024
Lab Number : 06160629 **Tested** : 26 Apr 2024
Unique Number : 10996052 **Diagnosed** : 26 Apr 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529
 Contact: RENN MASHBURN
 renn.mashburn@jamesriverequipment.com
 T:
 F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)