



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[W65831]
 Machine Id
TEREX TA300 TTHA1189JK0111047
 Component
Front Differential
 Fluid
GEAR OIL SAE 80W90 (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W65831)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0206804	JR0119757	---
Sample Date		Client Info		23 Apr 2024	19 Apr 2022	---
Machine Age	hrs	Client Info		4846	1704	---
Oil Age	hrs	Client Info		4846	500	---
Filter Age	hrs	Client Info		0	500	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		42	42	---
Iron	ppm	ASTM D5185m	>500	68	93	---
Chromium	ppm	ASTM D5185m	>10	0	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	0	1	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>100	5	11	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	16	12	---
Potassium	ppm	ASTM D5185m	>20	<1	1	---
Water		WC Method	>.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	2	0	---
Boron	ppm	ASTM D5185m	400	6	21	---
Barium	ppm	ASTM D5185m	200	0	0	---
Molybdenum	ppm	ASTM D5185m	12	0	<1	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m	12	12	23	---
Calcium	ppm	ASTM D5185m	150	7	38	---
Phosphorus	ppm	ASTM D5185m	1650	2377	315	---
Zinc	ppm	ASTM D5185m	125	17	9	---
Sulfur	ppm	ASTM D5185m	22500	34461	14936	---
Visc @ 40°C	cSt	ASTM D445	143	144	133	---

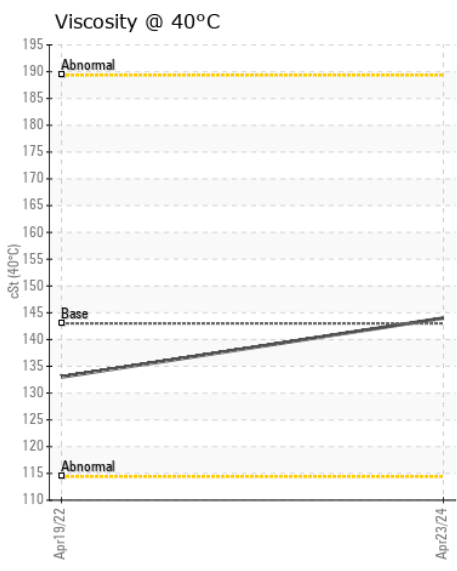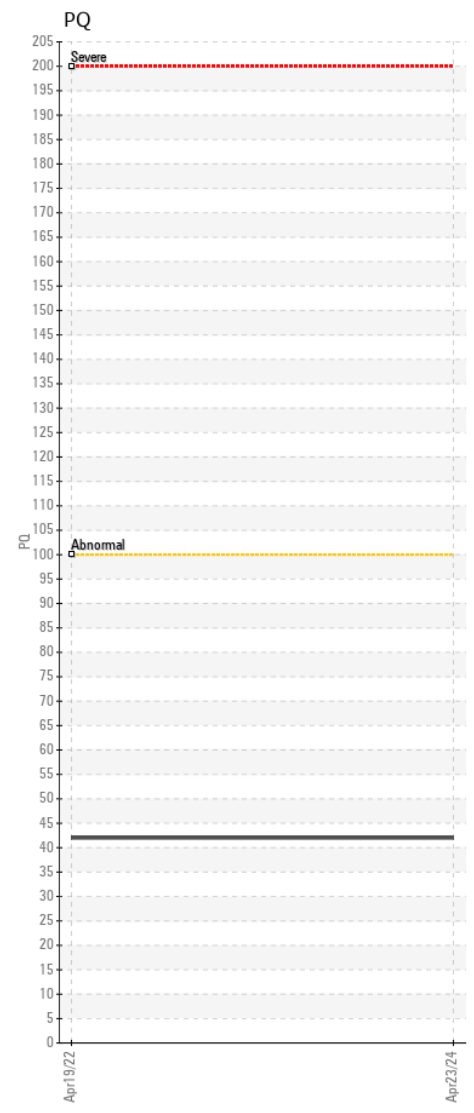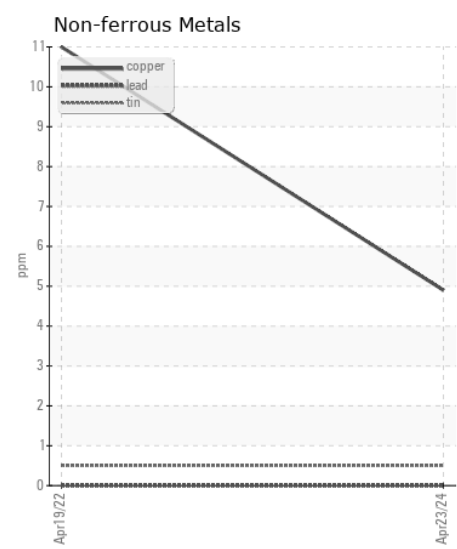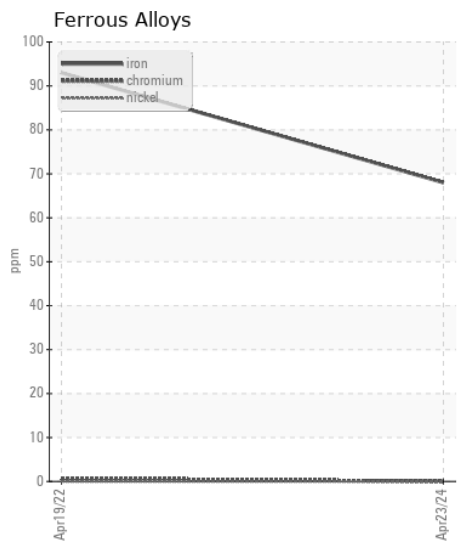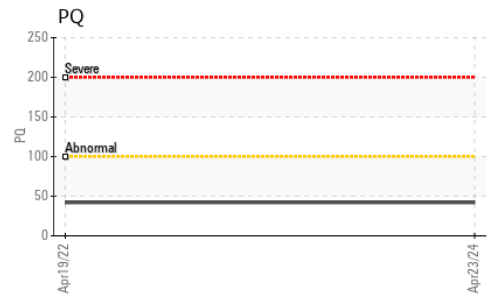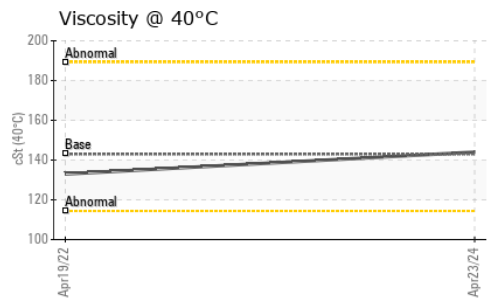

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0206804
Lab Number : 06160657
Unique Number : 10996080
Test Package : CONST (Additional Tests: PQ)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269
 Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com
 T: (704)597-0211
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)