



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 4 - Fairmont
Machine Id
JOHN DEERE 210G 1FF210GXCNF530233
Component
Swing Drive
Fluid
JOHN DEERE HY-GARD HYD/TRANS (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0049085	LEC0042188	LEC0042188
Sample Date		Client Info		16 Apr 2024	30 Aug 2023	30 Aug 2023
Machine Age	hrs	Client Info		1494	882	882
Oil Age	hrs	Client Info		612	424	424
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Changed	Changed
Filter Changed		Client Info		N/A	None	None
Sample Status				NORMAL	ATTENTION	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		46	22	110
Iron	ppm	ASTM D5185m	>151	70	87	108
Chromium	ppm	ASTM D5185m	>11	1	<1	2
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>21	0	<1	<1
Lead	ppm	ASTM D5185m	>51	0	0	0
Copper	ppm	ASTM D5185m	>51	0	<1	<1
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>31	12	30	15
Potassium	ppm	ASTM D5185m	>20	0	3	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	2	2
Boron	ppm	ASTM D5185m	6	29	52	106
Barium	ppm	ASTM D5185m	0	2	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	9	<1
Manganese	ppm	ASTM D5185m		1	1	3
Magnesium	ppm	ASTM D5185m	145	81	109	0
Calcium	ppm	ASTM D5185m	3570	2639	2697	48
Phosphorus	ppm	ASTM D5185m	1290	935	911	522
Zinc	ppm	ASTM D5185m	1640	978	990	7
Sulfur	ppm	ASTM D5185m		7143	7276	17884
Visc @ 40°C	cSt	ASTM D445	57.0	74.2	76.2	186

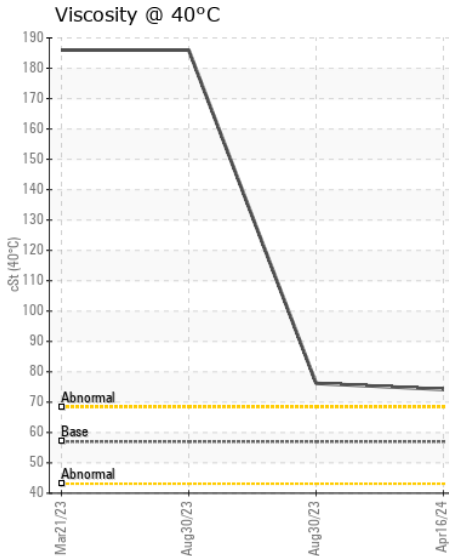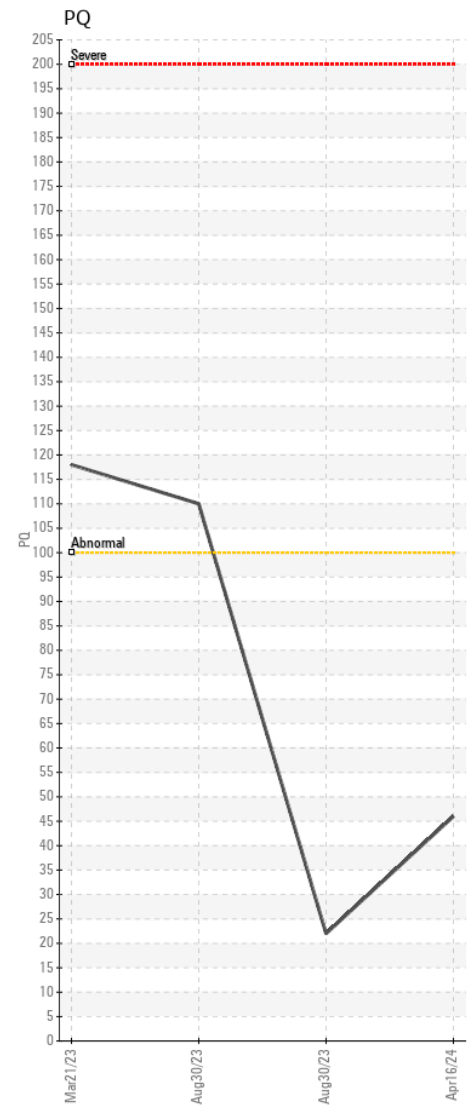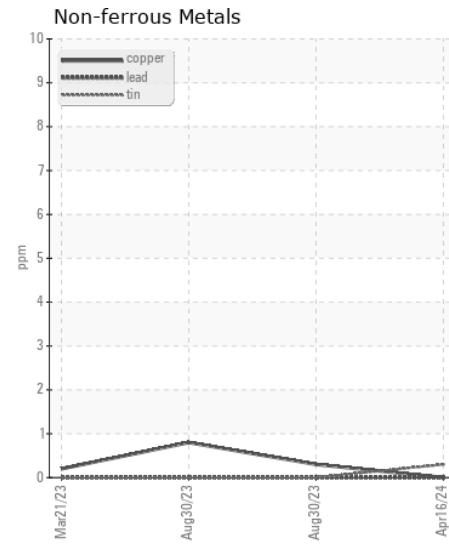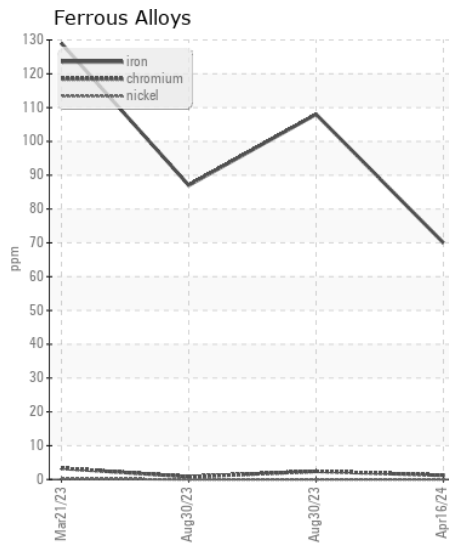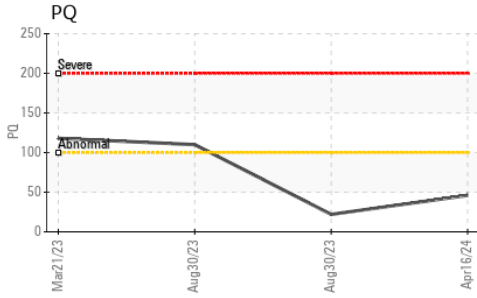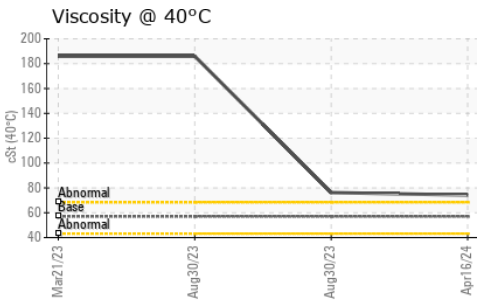

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0049085 **Received** : 25 Apr 2024
Lab Number : 06160694 **Tested** : 26 Apr 2024
Unique Number : 10996117 **Diagnosed** : 29 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (740)373-5570