



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Store 8 - Pikeville [RO#150127]
Machine Id
JOHN DEERE 260E 1DW260ETHJF693225
Component
Front Axle
Fluid
JOHN DEERE HY-GARD HYD/TRANS (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0048834	LEC0044100	LEC0042245
Sample Date		Client Info		22 Apr 2024	24 Jan 2024	22 Jun 2023
Machine Age	hrs	Client Info		5020	4437	3855
Oil Age	hrs	Client Info		583	2474	1892
Filter Age	hrs	Client Info		0	0	634
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		N/A	N/A	Not Changd
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		129	244	228
Iron	ppm	ASTM D5185m	>1501	204	449	930
Chromium	ppm	ASTM D5185m	>11	<1	2	4
Nickel	ppm	ASTM D5185m	>10	2	7	7
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>21	2	8	4
Lead	ppm	ASTM D5185m	>51	0	0	<1
Copper	ppm	ASTM D5185m	>101	41	97	▲ 209
Tin	ppm	ASTM D5185m	>10	2	4	7
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	12	29	25
Potassium	ppm	ASTM D5185m	>20	0	<1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	LIGHT	LIGHT
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	3	1
Boron	ppm	ASTM D5185m	6	4	9	19
Barium	ppm	ASTM D5185m	0	1	2	0
Molybdenum	ppm	ASTM D5185m	0	1	4	9
Manganese	ppm	ASTM D5185m		5	13	21
Magnesium	ppm	ASTM D5185m	145	108	97	94
Calcium	ppm	ASTM D5185m	3570	3585	3277	3550
Phosphorus	ppm	ASTM D5185m	1290	1081	1018	1051
Zinc	ppm	ASTM D5185m	1640	1282	1217	1266
Sulfur	ppm	ASTM D5185m		3916	3220	4203
Visc @ 40°C	cSt	ASTM D445	57.0	53.1	53.9	52.0

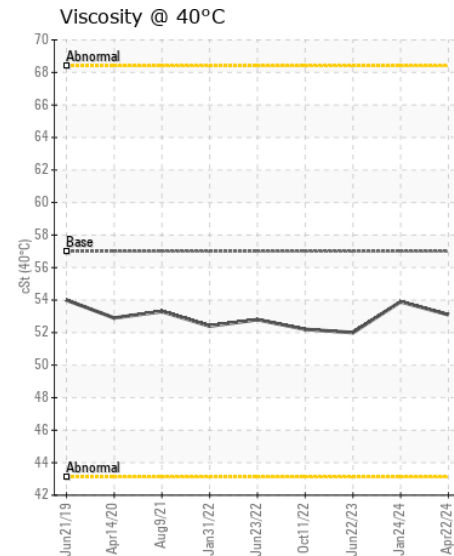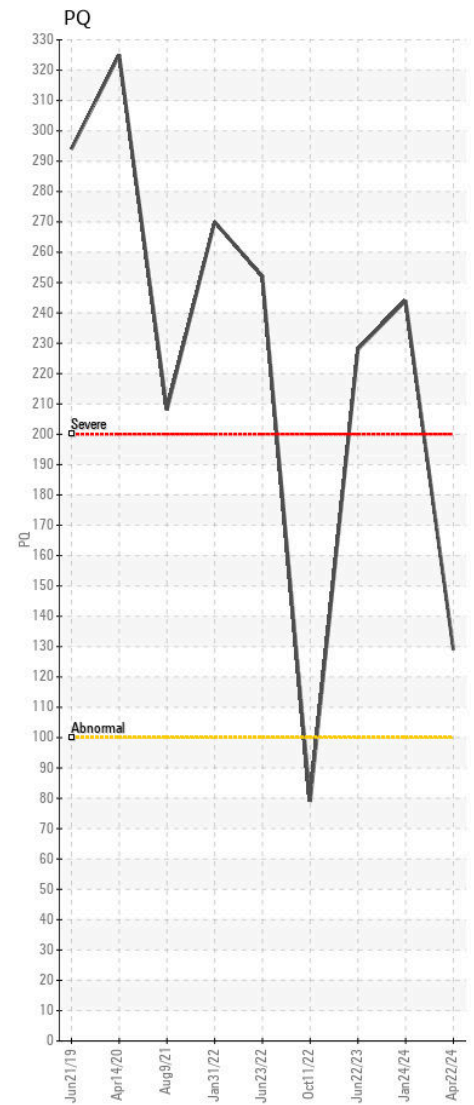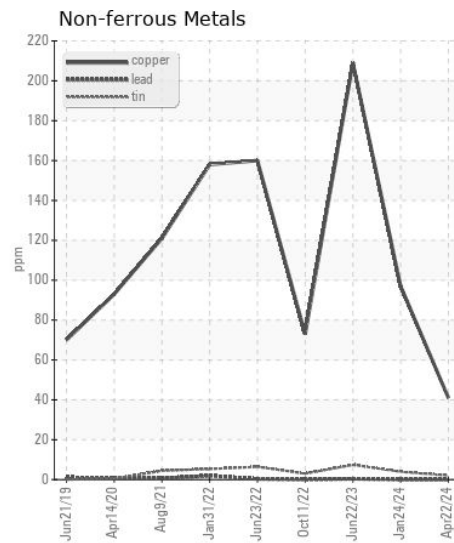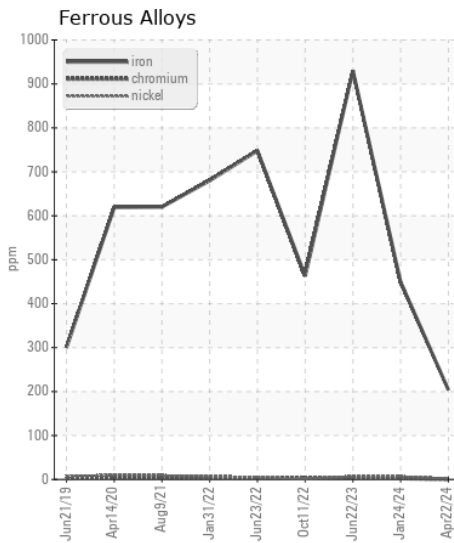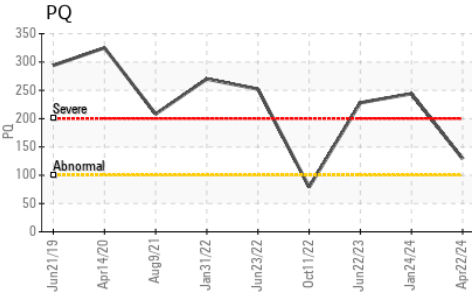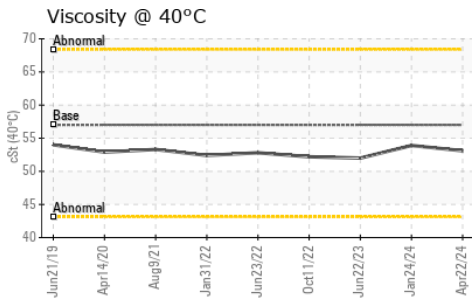

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0048834 **Received** : 25 Apr 2024
Lab Number : 06160707 **Tested** : 26 Apr 2024
Unique Number : 10996130 **Diagnosed** : 26 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)