



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Area
Store 2 - Beaver [Ro#150153]
Machine Id
JOHN DEERE 333G 1T0333GMVPF449803
Component
Right Propel Gearbox
Fluid
JOHN DEERE HY-GARD HYD/TRANS (1 QTS)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0048909	LEC0046907	---
Sample Date		Client Info		22 Apr 2024	24 Jan 2024	---
Machine Age	hrs	Client Info		975	626	---
Oil Age	hrs	Client Info		349	626	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR

The chromium level is abnormal. All other component wear rates are normal.

PQ		ASTM D8184		75	129	---
Iron	ppm	ASTM D5185m	>1250	1006	▲ 2738	---
Chromium	ppm	ASTM D5185m	>10	▲ 19	▲ 51	---
Nickel	ppm	ASTM D5185m	>10	0	4	---
Titanium	ppm	ASTM D5185m		1	3	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m		● 11	● 24	---
Lead	ppm	ASTM D5185m		0	0	---
Copper	ppm	ASTM D5185m		0	2	---
Tin	ppm	ASTM D5185m		<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m		▲ 57	▲ 99	---
Potassium	ppm	ASTM D5185m	>20	8	25	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	3	---
Boron	ppm	ASTM D5185m	6	1	4	---
Barium	ppm	ASTM D5185m	0	33	93	---
Molybdenum	ppm	ASTM D5185m	0	0	3	---
Manganese	ppm	ASTM D5185m		10	21	---
Magnesium	ppm	ASTM D5185m	145	96	7	---
Calcium	ppm	ASTM D5185m	3570	3089	32	---
Phosphorus	ppm	ASTM D5185m	1290	1040	271	---
Zinc	ppm	ASTM D5185m	1640	1134	3	---
Sulfur	ppm	ASTM D5185m		6485	17684	---
Visc @ 40°C	cSt	ASTM D445	57.0	58.6	135	---

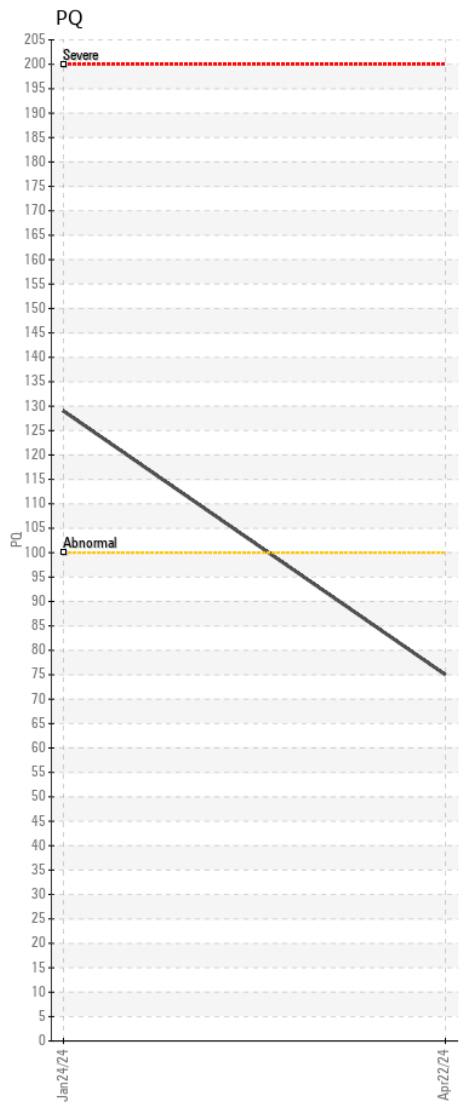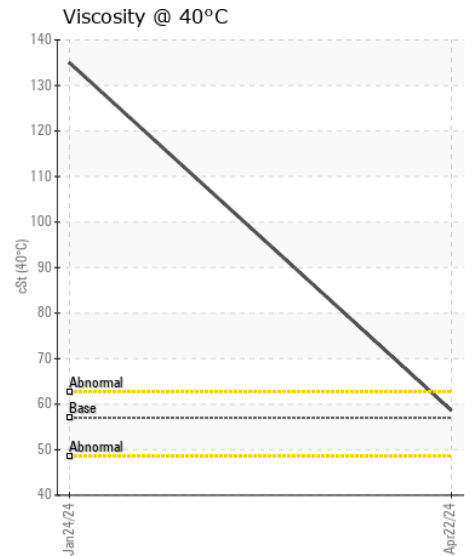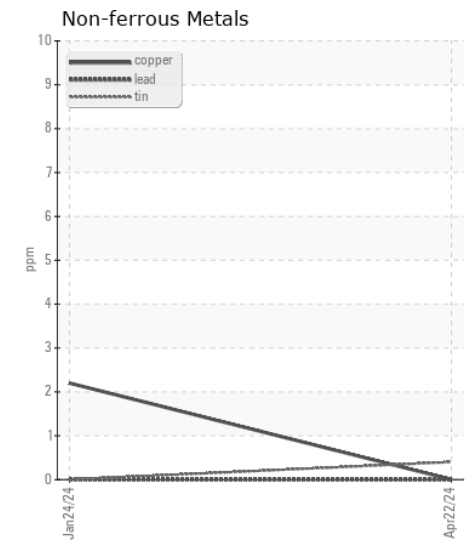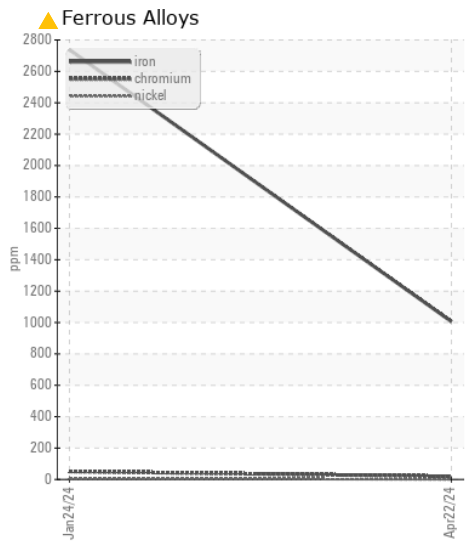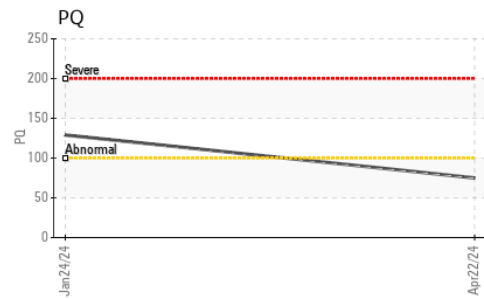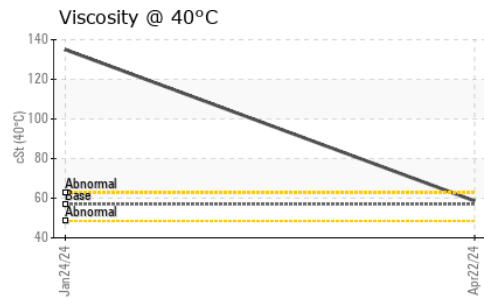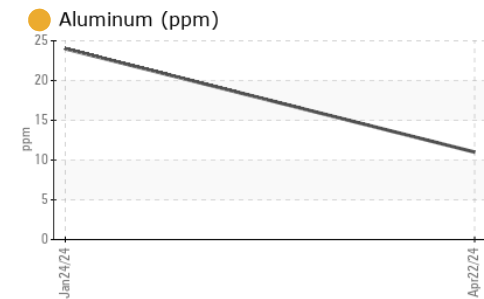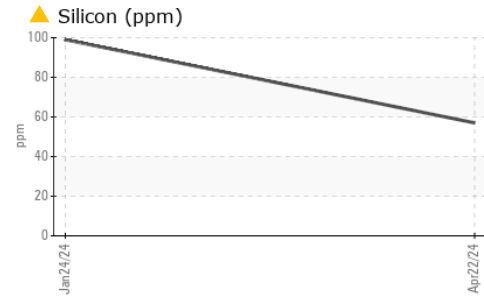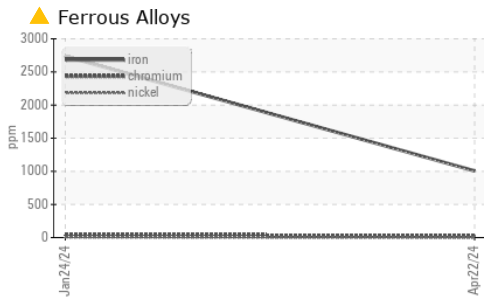

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0048909 **Received** : 25 Apr 2024
Lab Number : 06160710 **Tested** : 26 Apr 2024
Unique Number : 10996133 **Diagnosed** : 29 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)