



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
K5 CONSTRUCTION CORPORATION - HODGKINS IL

Machine Id
2028
Component
Front Right Planetary

Fluid
LEAHY WOLF SYNMASTER 80W140 (1 hrs)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LW0008852	LW0004325	LWI-K94662
Sample Date		Client Info		19 Apr 2024	11 Feb 2022	01 May 2018
Machine Age	hrs	Client Info		5847	5818	5331
Oil Age	hrs	Client Info		29	395	1819
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	Not Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	74	127	33
Chromium	ppm	ASTM D5185m	>10	0	1	0
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	<1	0
Lead	ppm	ASTM D5185m	>25	0	2	0
Copper	ppm	ASTM D5185m	>75	3	17	5
Tin	ppm	ASTM D5185m	>10	<1	2	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	23	47	6
Potassium	ppm	ASTM D5185m	>20	3	9	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	LIGHT	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	3	0
Boron	ppm	ASTM D5185m	202	265	242	277
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		<1	2	0
Magnesium	ppm	ASTM D5185m		<1	2	0
Calcium	ppm	ASTM D5185m		11	32	5
Phosphorus	ppm	ASTM D5185m	1209	1376	1297	1156
Zinc	ppm	ASTM D5185m		27	108	11
Sulfur	ppm	ASTM D5185m	20439	26635	20802	---
Visc @ 40°C	cSt	ASTM D445	230	241	227	---

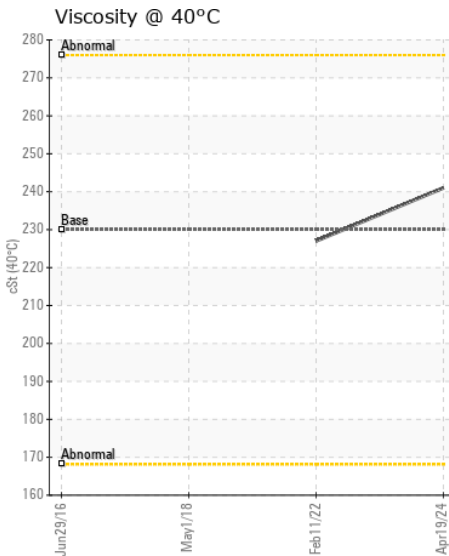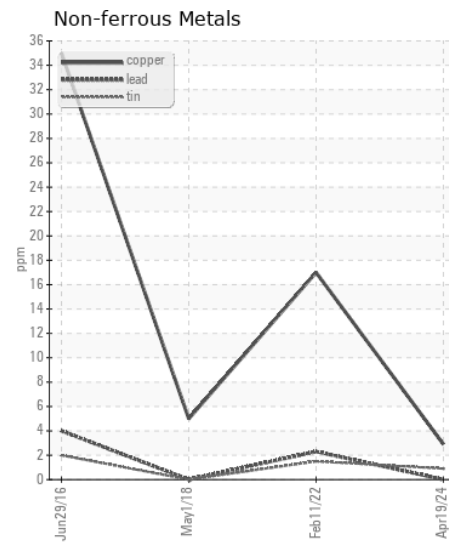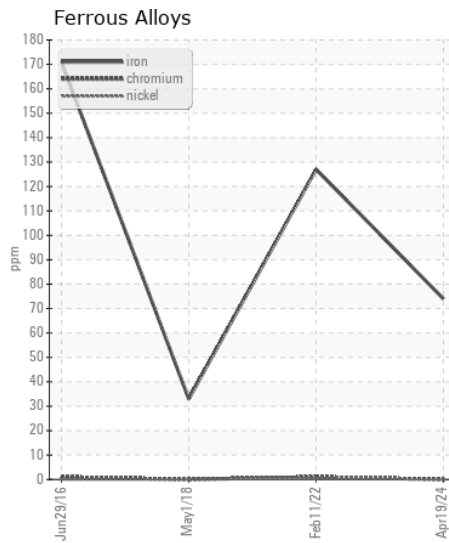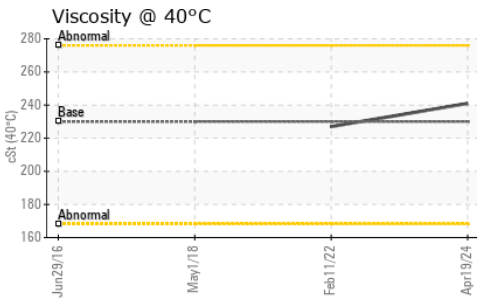

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LW0008852
Lab Number : 06160799
Unique Number : 10996222
Test Package : FLEET

Received : 25 Apr 2024
Tested : 26 Apr 2024
Diagnosed : 29 Apr 2024 - Sean Felton

K5 CONSTRUCTION CORPORATION
 6301 S EAST AVENUE
 HODGKINS, IL
 US 60525
 Contact: FRANCISCO MUNOZ
 franciscom@k-five.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: