



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
TOTE 112
 Component
New (Unused) Oil
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

This is a baseline read-out on the submitted sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TLC0001636	---	---
Sample Date		Client Info		19 Apr 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

Iron	ppm	ASTM D5185m	>5	0	---	---
Chromium	ppm	ASTM D5185m	>5	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>5	0	---	---
Aluminum	ppm	ASTM D5185m	>5	<1	---	---
Lead	ppm	ASTM D5185m	>5	0	---	---
Copper	ppm	ASTM D5185m	>5	0	---	---
Tin	ppm	ASTM D5185m	>5	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---









CONTAMINATION

There is a high amount of silt (particulates < 6 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>15	6	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Water	%	ASTM D6304		NEG	---	---
Particles >4µm		ASTM D7647	>5000	▲ 11800	---	---
Particles >6µm		ASTM D7647	>1300	973	---	---
Particles >14µm		ASTM D7647	>160	35	---	---
Particles >21µm		ASTM D7647	>40	11	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 21/17/12	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---

FLUID CONDITION

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m		103	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		45	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		199	---	---
Calcium	ppm	ASTM D5185m		870	---	---
Phosphorus	ppm	ASTM D5185m		479	---	---
Zinc	ppm	ASTM D5185m		535	---	---
Sulfur	ppm	ASTM D5185m		2528	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.12	---	---
Visc @ 40°C	cSt	ASTM D445		53.97	---	---
Visc @ 100°C	cSt	ASTM D445		9.35	---	---
Viscosity Index (VI)	Scale	ASTM D2270		156	---	---

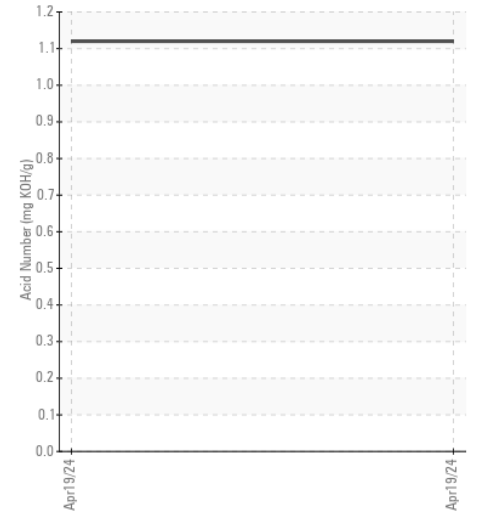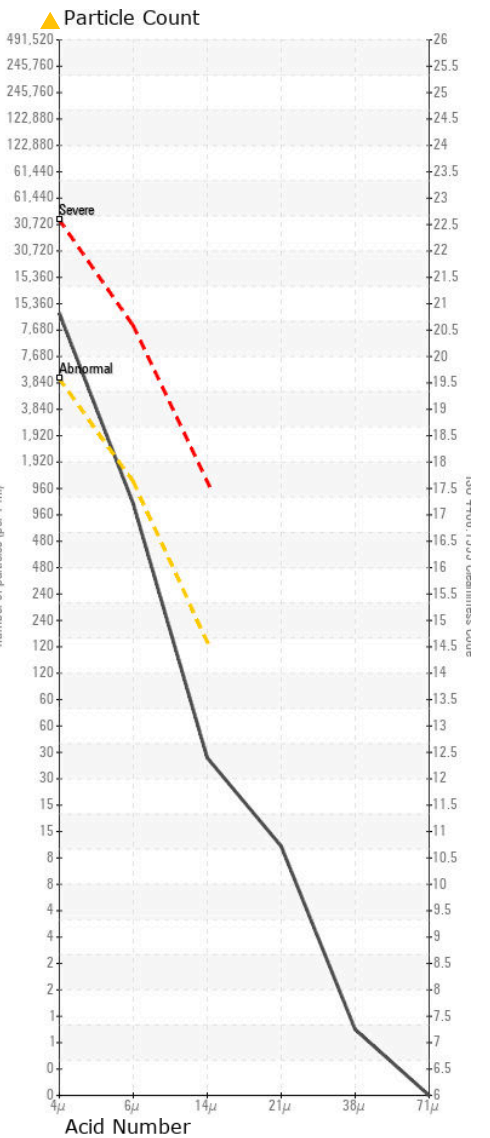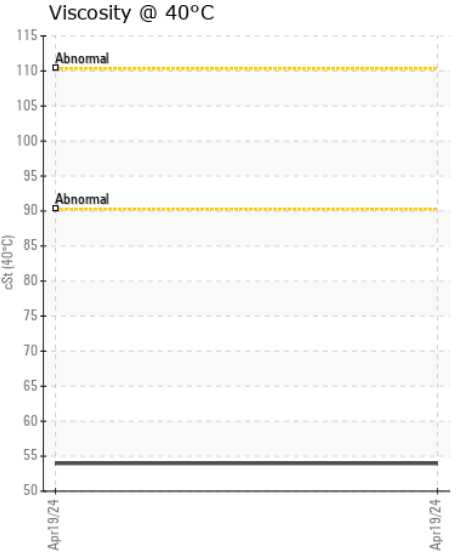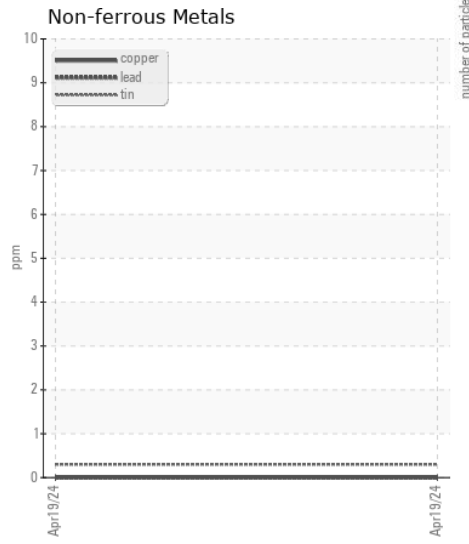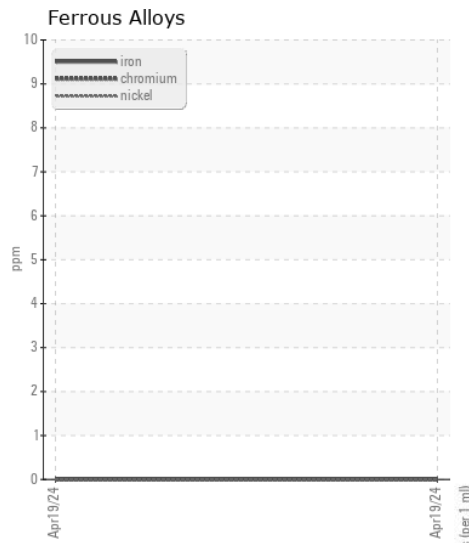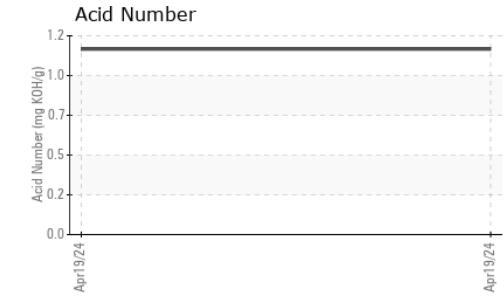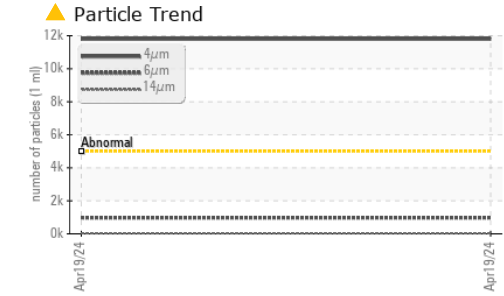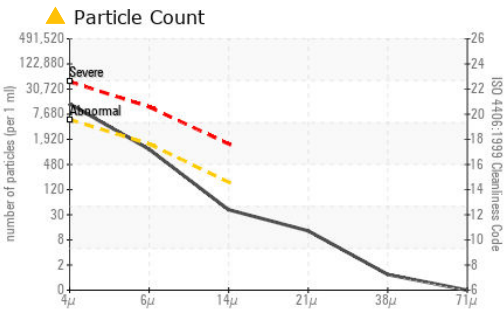

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TLC0001636 **Received** : 25 Apr 2024
Lab Number : 06160884 **Tested** : 30 Apr 2024
Unique Number : 10996307 **Diagnosed** : 30 Apr 2024 - Jonathan Hester
Test Package : PLANT (Additional Tests: FT-IR, ICP-NewOil, KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

SUPPLY PRO
 115 EMPIRE WAY
 ATLANTA, GA
 US 30354
 Contact: MICHAEL JACKSON
 mjackson@supplypro1.com
 T: (470)991-1693
 F: