

Machine Id CATERPILLAR CS323C PA Component Anti-Freeze Fluid {not provided} (GAL)	ADFOOT R	L272	22 (S/N	EAS	00290))	
RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
The fluid is suitable for further service.	Sample Number		Client Info		DC0032449		
	Sample Date		Client Info		24 Apr 2024		
	Machine Age	hrs	Client Info		738		
	Oil Age	hrs	Client Info		0		
	Filter Age	hrs	Client Info		0		
	Oil Changed		Client Info		N/A		
	Filter Changed		Client Info		N/A		
	Sample Status				NORMAL		
WEAR	Total Dissolved Solids				388.5		
	Coolant Appearance		*Visual	Clear	normal		
CONTAMINATION	Water		WC Method		NEG		
FLUID CONDITION nation in the coolant.	Boiling Point	°C	WC Method		226		
Glycol and nitrite levels are acceptable. The pH level of this fluid is within the acceptable limits.	Specific Gravity		*ASTM D1298		1.069		
	рН	Scale 0-14	ASTM D1287		7.98		

Nitrites

Percentage Glycol %

Freezing Point °F

Carboxylate

Coolant Color

ppm

Reserve Alkalinity Scale 0-20 *ASTM D1121

AP-053:2009

ASTM D3321

ASTM D3321

*Visual


524


51.1


-38

n/a

Orange

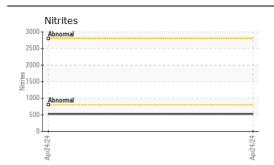

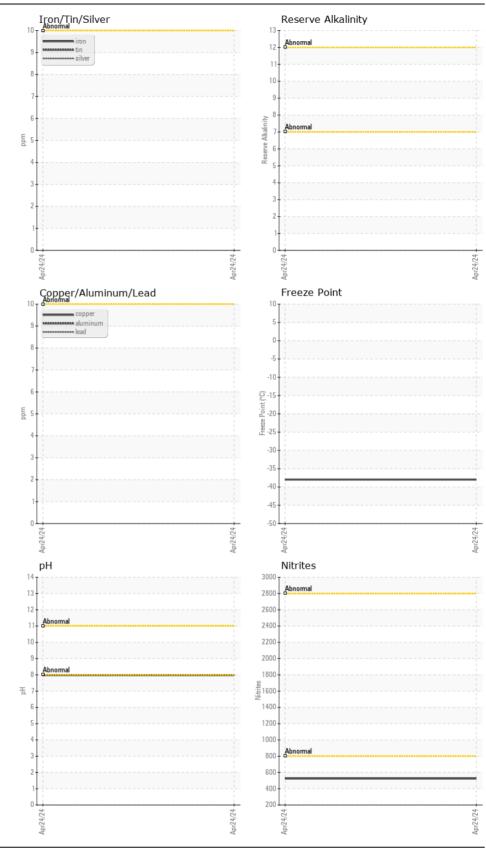

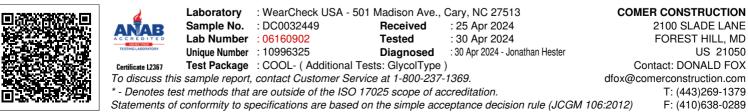

Contact/Location: DONALD FOX - COMFORMD Page 2 of 2