



VOLVO PENTA

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area

[DUNN]

Machine Id

VOLVO PENTA 3200000455

Component

Port IPS

Fluid

{not provided} (--- QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.











CONTAMINATION

There is a light concentration of water present in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA053610	---	---
Sample Date		Client Info		23 Apr 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---
PQ		ASTM D8184		23	---	---
Iron	ppm	ASTM D5185m	>200	28	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		0	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		3	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m		<1	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water	%	ASTM D6304	>0.2	▲ 0.284	---	---
ppm Water	ppm	ASTM D6304	>2000	▲ 2840	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	▲ 0.2%	---	---
Sodium	ppm	ASTM D5185m		6	---	---
Boron	ppm	ASTM D5185m		316	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		34	---	---
Calcium	ppm	ASTM D5185m		69	---	---
Phosphorus	ppm	ASTM D5185m		1419	---	---
Zinc	ppm	ASTM D5185m		18	---	---
Sulfur	ppm	ASTM D5185m		27956	---	---
Visc @ 40°C	cSt	ASTM D445		104.1	---	---

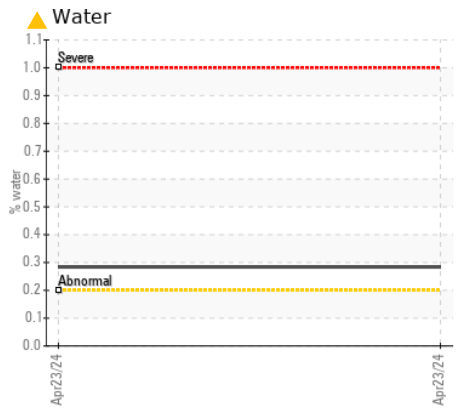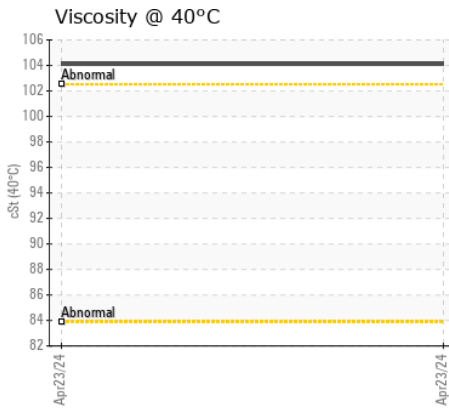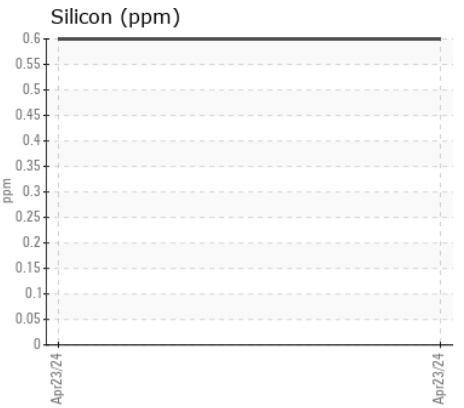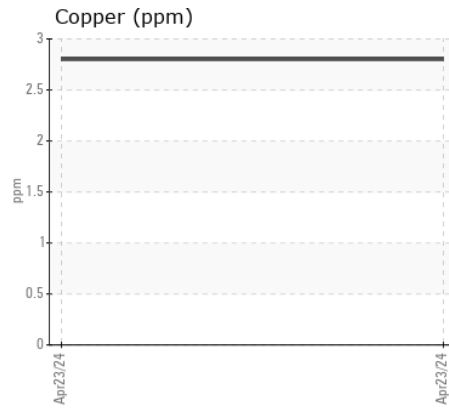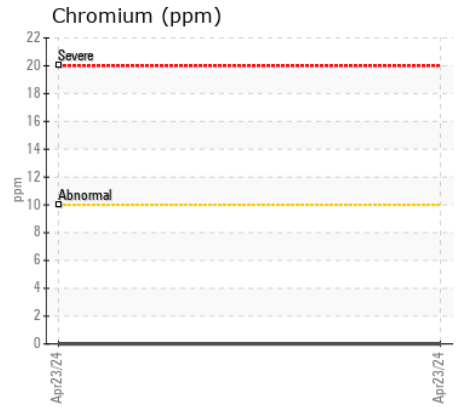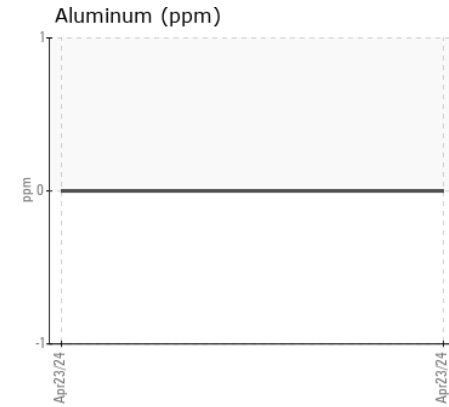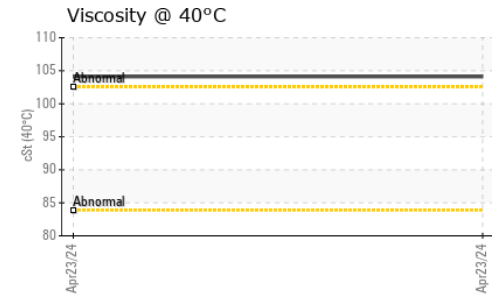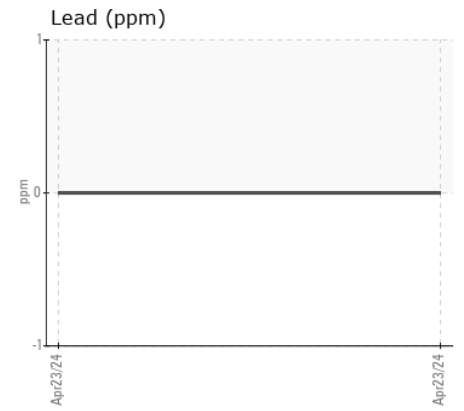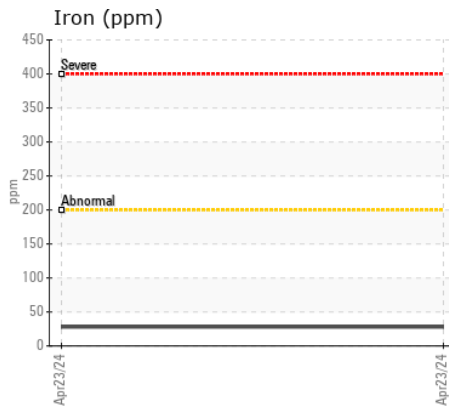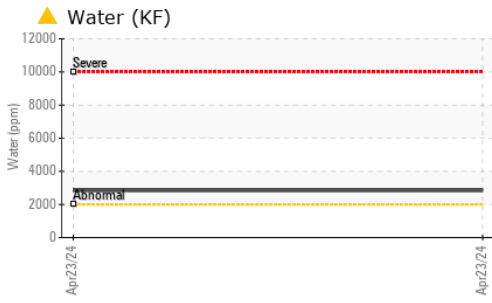

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA053610 **Received** : 25 Apr 2024
Lab Number : 06160914 **Tested** : 25 Apr 2024
Unique Number : 10996337 **Diagnosed** : 25 Apr 2024 - Sean Felton
Test Package : MOB 1 (Additional Tests: KF, PQ)

Harry's Marine Service LLC
 1141 N. Citrus St.
 Orange, CA
 US 92887
 Contact: TARAH AULD
 info@harrysmarine.com
 T: (714)771-7899
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)