



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
WIRTGEN 621
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (9 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RW0005163	RW0005473	RW0001971
Sample Date		Client Info		14 Feb 2024	14 Feb 2024	25 Feb 2021
Machine Age	hrs	Client Info		5377	5346	4207
Oil Age	hrs	Client Info		441	199	0
Filter Age	hrs	Client Info		441	199	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	---	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	17	11	41
Chromium	ppm	ASTM D5185m	>20	0	0	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	3	3	3
Lead	ppm	ASTM D5185m	>40	0	<1	1
Copper	ppm	ASTM D5185m	>330	2	6	3
Tin	ppm	ASTM D5185m	>15	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	2	4	<1
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1	0.2	1.7
Nitration	Abs/cm	*ASTM D7624	>20	7.0	6.6	9.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.5	18.2	22
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<1	<1	3
Boron	ppm	ASTM D5185m	250	5	97	17
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	64	67	71
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	1031	456	752
Calcium	ppm	ASTM D5185m	3000	1267	1977	1318
Phosphorus	ppm	ASTM D5185m	1150	1149	1153	967
Zinc	ppm	ASTM D5185m	1350	1405	1397	1246
Sulfur	ppm	ASTM D5185m	4250	4192	4561	2420
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.1	13.8	14
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.69	9.33	9.07
Visc @ 100°C	cSt	ASTM D445	14.4	12.8	12.4	12.8

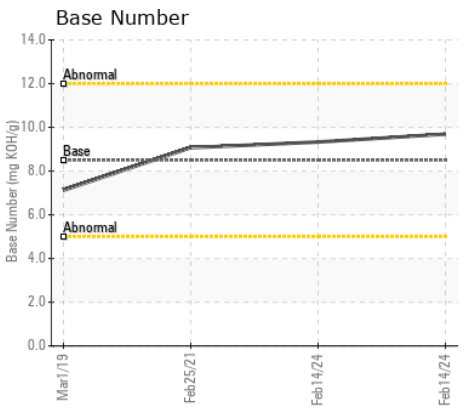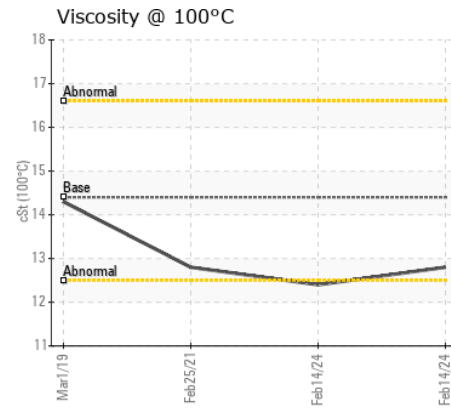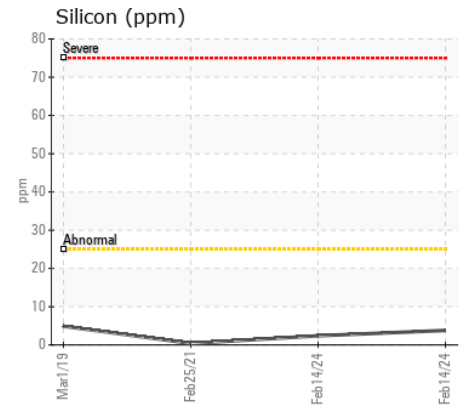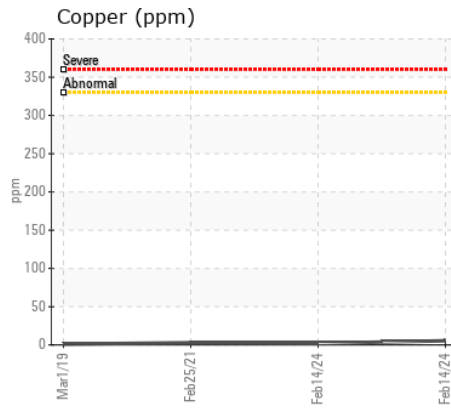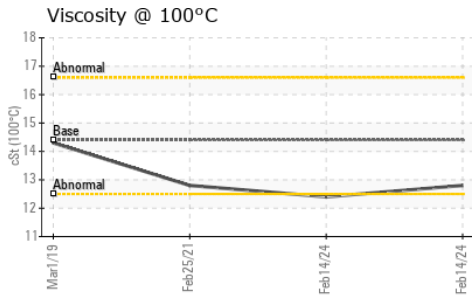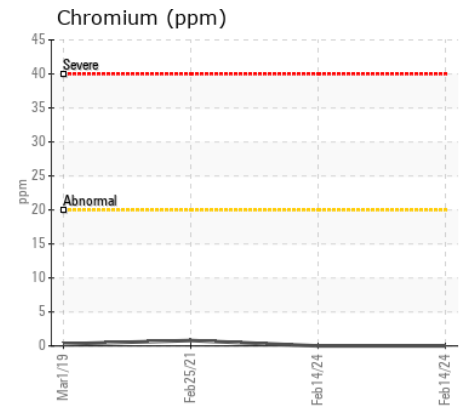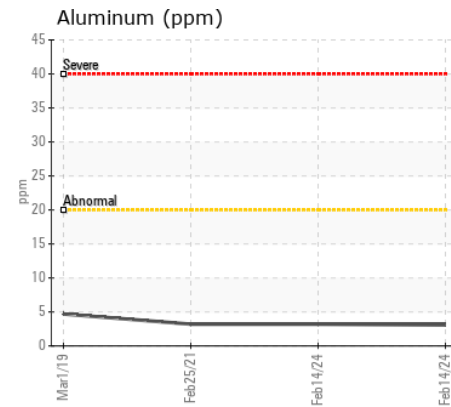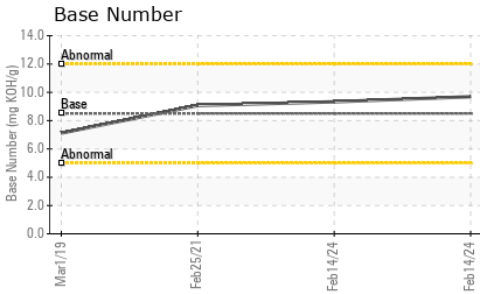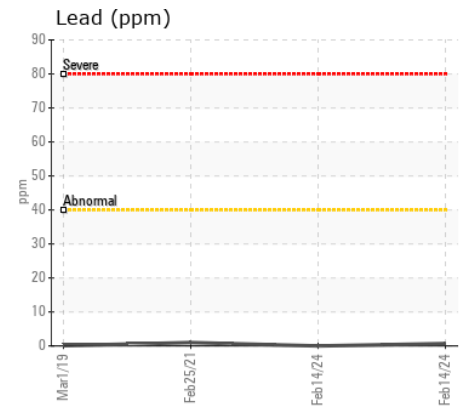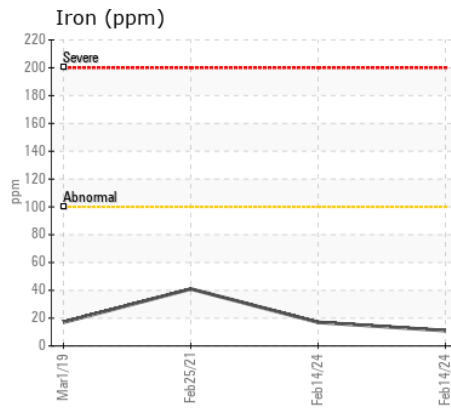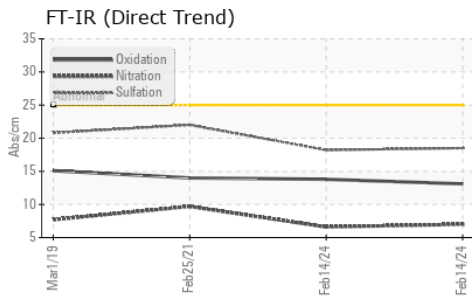

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RW0005163
Lab Number : 06161021
Unique Number : 10996444
Test Package : MOB 2

Received : 25 Apr 2024
Tested : 26 Apr 2024
Diagnosed : 26 Apr 2024 - Wes Davis

HALLACK CONTRACTING, INC.
 4223 W POLK
 HART, MI
 US 49420

Contact: DAN HALLACK KARL BUTCHER
 shop@hallackcontracting.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (231)873-5081
 F: (231)873-2889