



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
JOHN F SECREST
Machine Id
[JOHN F SECREST] 001 565425-1
Component
Port Main Engine
Fluid
CHEVRON DELO 710 LS (250 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0068746	MW0065924	MW0065919
Sample Date		Client Info		19 Apr 2024	01 Apr 2024	01 Mar 2024
Machine Age	hrs	Client Info		13702	13251	12507
Oil Age	hrs	Client Info		13702	13251	12507
Filter Age	hrs	Client Info		0	13251	107
Oil Changed		Client Info		N/A	N/A	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	14	17	15
Chromium	ppm	ASTM D5185m	>8	2	3	2
Nickel	ppm	ASTM D5185m	>2	0	1	0
Titanium	ppm	ASTM D5185m	>3	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	2	2	1
Lead	ppm	ASTM D5185m	>18	5	7	5
Copper	ppm	ASTM D5185m	>80	16	▲ 52	15
Tin	ppm	ASTM D5185m	>14	7	8	6
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	4	5	4
Potassium	ppm	ASTM D5185m	>20	<1	2	0
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	0.0	NEG
Soot %	%	*ASTM D7844	>3	0.6	0.6	0.6
Nitration	Abs/cm	*ASTM D7624	>20	8.4	9.0	8.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.9	16.9	17.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	▲ 0.2%	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	1	5	1
Boron	ppm	ASTM D5185m		44	46	39
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		48	50	46
Manganese	ppm	ASTM D5185m		2	2	1
Magnesium	ppm	ASTM D5185m		20	14	17
Calcium	ppm	ASTM D5185m		3972	3558	3647
Phosphorus	ppm	ASTM D5185m		13	16	9
Zinc	ppm	ASTM D5185m		15	27	6
Sulfur	ppm	ASTM D5185m		3257	2428	2578
Oxidation	Abs/.1mm	*ASTM D7414	>25	9.1	9.2	9.2
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	9.26	9.01	8.96
Visc @ 100°C	cSt	ASTM D445	15.5	14.7	14.7	14.9


FT-IR (Direct Trend)

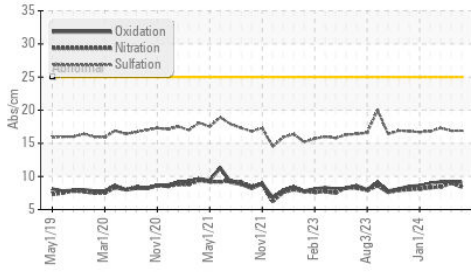


Ferrous Alloys

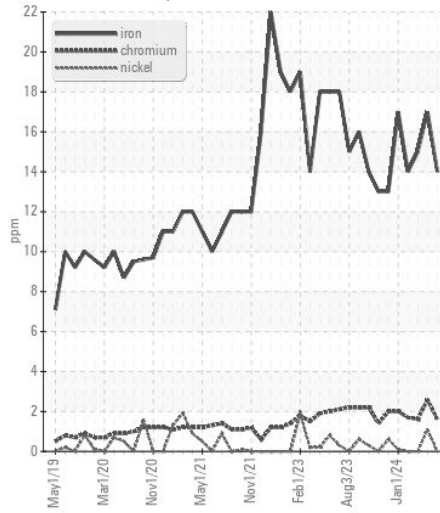


Base Number

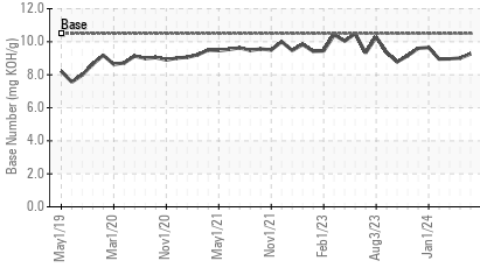


Non-ferrous Metals

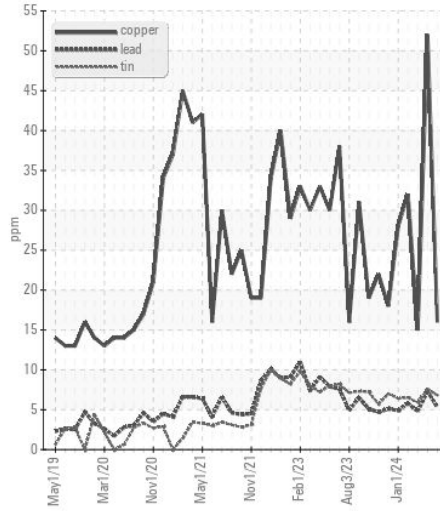


Viscosity @ 100°C

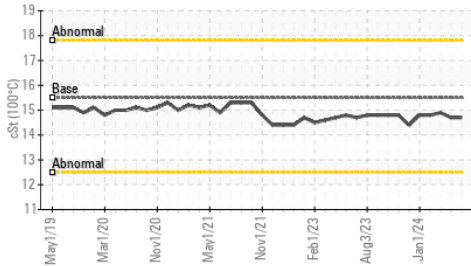

Viscosity @ 100°C

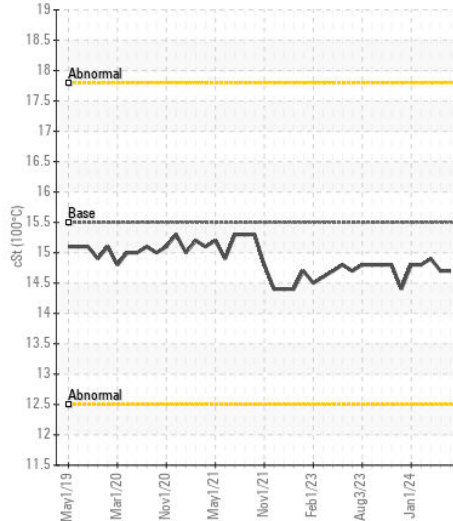

Base Number

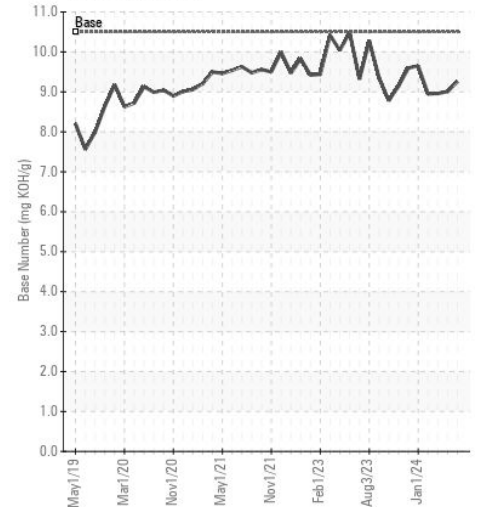

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW0068746

Lab Number : 06161032

Unique Number : 10996455

Test Package : MAR 2

Received : 25 Apr 2024

Tested : 26 Apr 2024

Diagnosed : 29 Apr 2024 - Don Baldrige

INGRAM BARGE

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: ANTHONY VAN CURA

anthony.vancura@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)