



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id
CR1219
Component
Gearbox
Fluid
GEAR OIL ISO 220 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The oil viscosity is higher than normal. Confirm oil type.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0877527	WC0784910	---
Sample Date		Client Info		18 Apr 2024	10 Apr 2023	---
Machine Age	hrs	Client Info		3611	2619	---
Oil Age	hrs	Client Info		992	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	Changed	---
Sample Status				ATTENTION	NORMAL	---
<hr/>						
Iron	ppm	ASTM D5185m	>200	25	162	---
Chromium	ppm	ASTM D5185m	>10	0	2	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	0	<1	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>200	0	0	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
<hr/>						
Silicon	ppm	ASTM D5185m	>50	<1	7	---
Potassium	ppm	ASTM D5185m	>20	1	1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	MODER	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
<hr/>						
Sodium	ppm	ASTM D5185m		1	2	---
Boron	ppm	ASTM D5185m	50	0	0	---
Barium	ppm	ASTM D5185m	15	4	0	---
Molybdenum	ppm	ASTM D5185m	15	0	<1	---
Manganese	ppm	ASTM D5185m		2	2	---
Magnesium	ppm	ASTM D5185m	50	0	1	---
Calcium	ppm	ASTM D5185m	50	5	2	---
Phosphorus	ppm	ASTM D5185m	350	313	68	---
Zinc	ppm	ASTM D5185m	100	34	4	---
Sulfur	ppm	ASTM D5185m	12500	6320	2279	---
Visc @ 40°C	cSt	ASTM D445	220	401	267	---

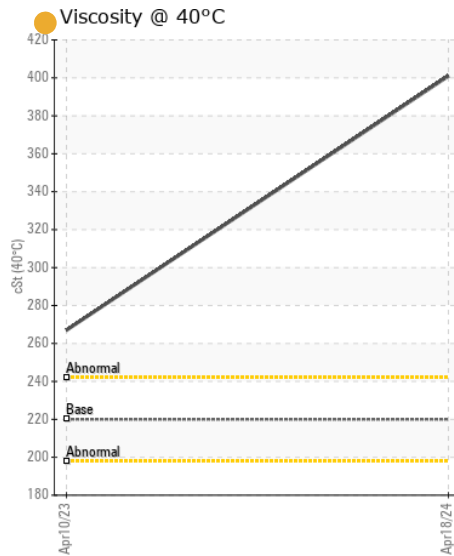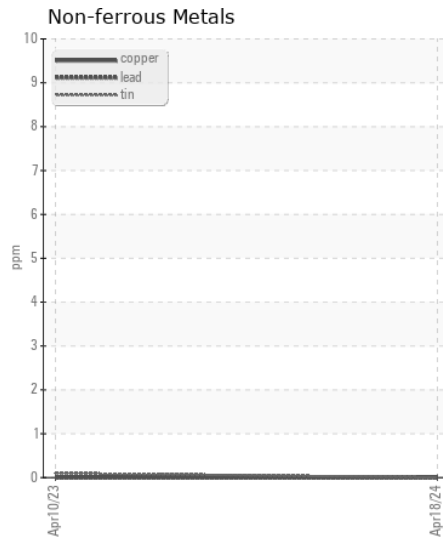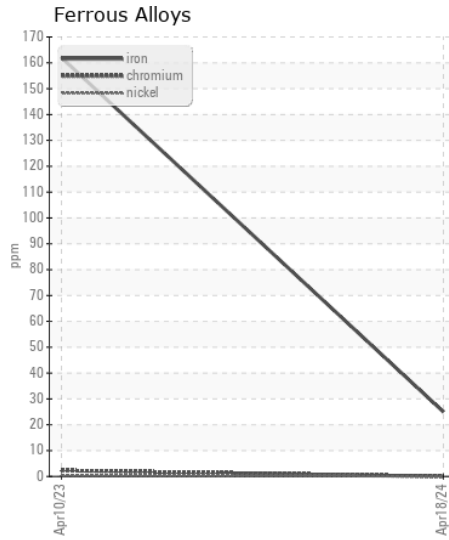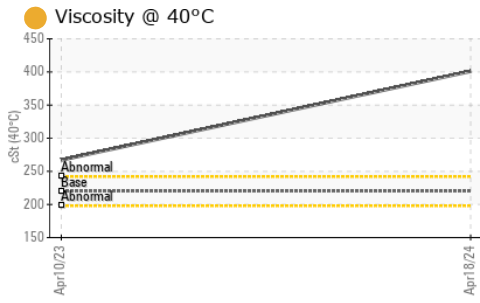

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0877527

Lab Number : 06161060

Unique Number : 10996483

Test Package : CONST

Received : 25 Apr 2024

Tested : 26 Apr 2024

Diagnosed : 29 Apr 2024 - Don Baldrige

BUCKNER HEAVY LIFT

4732 NC 54 EAST

GRAHAM, NC

US 27253-9215

Contact: MICHAEL LAWSON

michaell@bucknercompanies.com

T: (336)376-8888

F: (336)376-4090

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)