WEAR CONTAMINATION **FLUID CONDITION**


NORMAL NORMAL NORMAL

Machine Id

3524

Component Diesel Engine

DIESEL ENGINE OIL SAE 15W40 (QTS)							
RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
	Sample Number		Client Info		WC0903121	WC0875911	WC0875716
Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.	Sample Date		Client Info		17 Apr 2024	15 Feb 2024	14 Dec 2023
	Machine Age	kms	Client Info		0	115862	107154
	Oil Age	kms	Client Info		60000	10000	0
	Filter Age	kms	Client Info		60000	10000	0
	Oil Changed		Client Info		Changed	Changed	Changed
	Filter Changed		Client Info		Changed	Changed	Changed
	Sample Status				NORMAL	NORMAL	MARGINAL
WEAD			AOTM DEADE	400		40	40
WEAR	Iron	ppm	ASTM D5185m		14	16	12
All component wear rates are normal.	Chromium	ppm	ASTM D5185m		1	<1	<1
	Nickel	ppm	ASTM D5185m	>4	<1	0	<1
	Titanium	ppm	ASTM D5185m		2	0	0
	Silver	ppm	ASTM D5185m		0	0	0
	Aluminum	ppm	ASTM D5185m		10	12	11
	Lead	ppm	ASTM D5185m		<1	0	0
	Copper	ppm	ASTM D5185m		2	1	2
	Tin	ppm	ASTM D5185m	>15	<1	1	<1
	Vanadium White Metal	ppm	*Visual	NONE	<1 NONE	<1 NONE	0 NONE
		scalar		NONE	NONE		
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
CONTAMINATION	Silicon	ppm		>25	6	4	4
There is no indication of any contamination in the oil.	Potassium	ppm	ASTM D5185m		8	7	10
	Fuel		WC Method	>5	<1.0	<1.0	0.0
	Water		WC Method	>0.2	NEG	NEG	NEG
	Glycol		WC Method		NEG	NEG	NEG
	Soot %	%	*ASTM D7844		0.3	0.2	0.4
	Nitration	Abs/cm	*ASTM D7624	>20	8.6	6.9	9.6
	Sulfation	Abs/.1mm	*ASTM D7415		21.4	19.5	19.7
	Silt	scalar	*Visual	NONE	NONE	NONE	NONE
	Debris	scalar	*Visual	NONE	NONE	NONE	NONE
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
	Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
	Odor	scalar	*Visual	NORML	NORML	NORML	NORML
	Emulsified Water	Scalar	*Visual	>0.2	NEG	NEG	NEG
FLUID CONDITION	Sodium	ppm	ASTM D5185m	>158	3	<1	3
	Boron	ppm	ASTM D5185m		257	275	7
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.	Barium	ppm	ASTM D5185m		0	0	<1
	Molybdenum	ppm	ASTM D5185m	100	75	77	80
	Manganese	ppm	ASTM D5185m		<1	<1	<1
	Magnesium	ppm	ASTM D5185m	450	470	424	975
	Calcium	ppm	ASTM D5185m		1353	1356	1133
	Phosphorus	ppm	ASTM D5185m	1150	1018	965	1127
	Zinc	ppm	ASTM D5185m	1350	1106	1157	1302
	Sulfur	ppm	ASTM D5185m	4250	3381	3070	3290
	Oxidation	Abs/.1mm	*ASTM D7414	>25	16.6	14.3	16.6
	Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.7	7.3	8.7

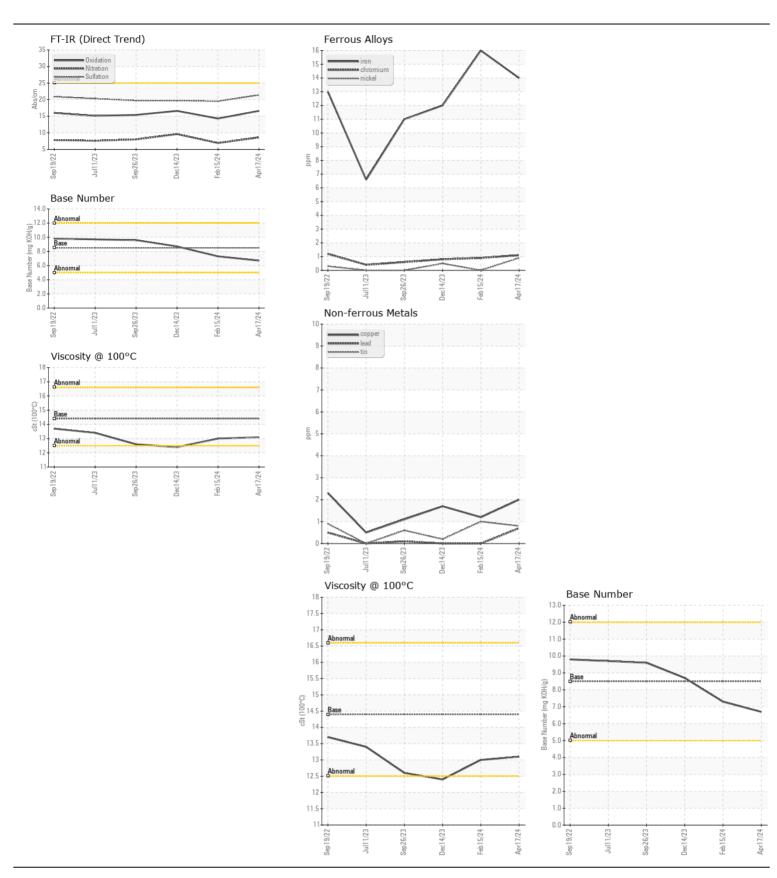





Certificate L2367

Laboratory Sample No.

: WC0903121 Lab Number : 06161093 Unique Number : 10996516 Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested**

: 25 Apr 2024 Diagnosed

: 29 Apr 2024 : 29 Apr 2024 - Wes Davis

SALEM NATIONALEASE CORPORATION 198 PARK PLAZA DRIVE

WINSTON SALEM, NC

US 27105 Contact: Audrey Hopkins

Audrey.Hopkins@salemcorp.com T: (336)767-9642

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: