



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area
(EEY356)
Machine Id
10651
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (7 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | GFL0118075 | GFL0115738 | GFL0112325 |
| Sample Date | | Client Info | | 24 Apr 2024 | 04 Apr 2024 | 13 Feb 2024 |
| Machine Age | hrs | Client Info | | 21638 | 21493 | 21222 |
| Oil Age | hrs | Client Info | | 145 | 271 | 586 |
| Filter Age | hrs | Client Info | | 145 | 271 | 586 |
| Oil Changed | | Client Info | | Not Changd | Changed | Changed |
| Filter Changed | | Client Info | | Not Changd | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | ATTENTION |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >75 | 9 | 4 | 20 |
| Chromium | ppm | ASTM D5185m | >5 | 1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >4 | <1 | <1 | 0 |
| Titanium | ppm | ASTM D5185m | >2 | <1 | <1 | <1 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >15 | 4 | 2 | 3 |
| Lead | ppm | ASTM D5185m | >25 | <1 | <1 | <1 |
| Copper | ppm | ASTM D5185m | >100 | 1 | <1 | 1 |
| Tin | ppm | ASTM D5185m | >4 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | <1 | <1 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION

There is no indication of any contamination in the oil.


| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >25 | 6 | 6 | 6 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 2 | 1 |
| Fuel | | WC Method | >3.0 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >6 | 0.3 | 0.2 | 0.5 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 7.5 | 5.4 | 10.1 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 18.3 | 17.0 | 21.0 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185m | | 9 | 3 | 11 |
| Boron | ppm | ASTM D5185m | 0 | 11 | 11 | 5 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 60 | 82 | 60 | 53 |
| Manganese | ppm | ASTM D5185m | 0 | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 1010 | 1209 | 839 | 758 |
| Calcium | ppm | ASTM D5185m | 1070 | 1416 | 1014 | 977 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 1518 | 917 | 887 |
| Zinc | ppm | ASTM D5185m | 1270 | 1633 | 1116 | 1069 |
| Sulfur | ppm | ASTM D5185m | 2060 | 4819 | 2847 | 2559 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 14.4 | 12.9 | 17.7 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | 7.7 | 8.5 | 5.8 |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 12.6 | 13.4 | 11.5 |


FT-IR (Direct Trend)

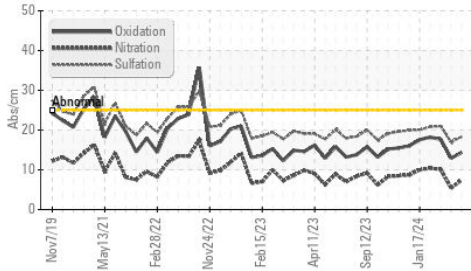


Base Number

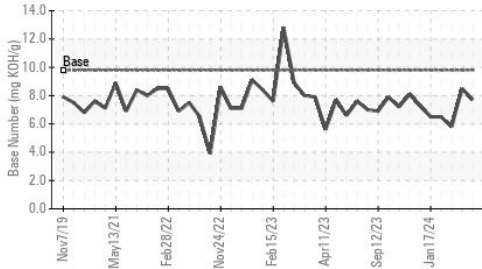


Viscosity @ 100°C

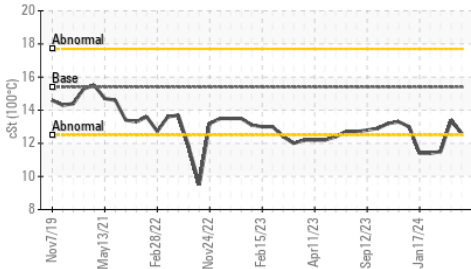


Ferrous Alloys

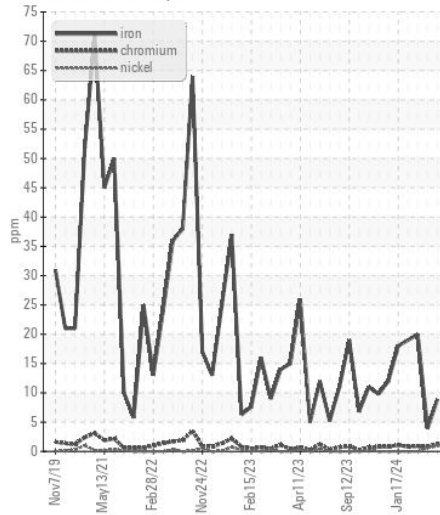


Non-ferrous Metals

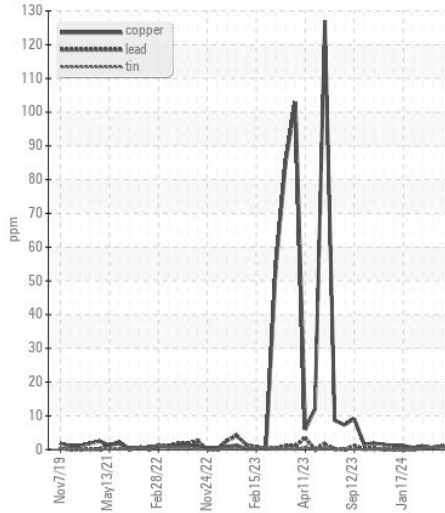

Viscosity @ 100°C

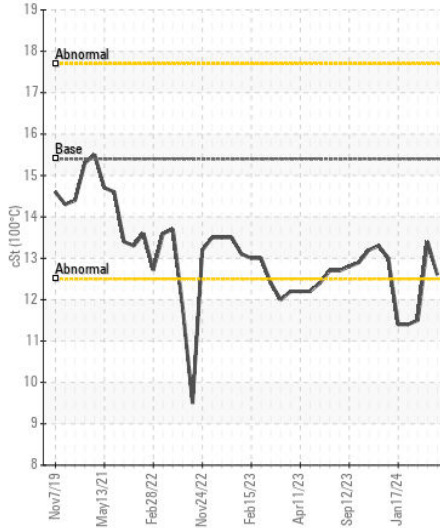

Base Number

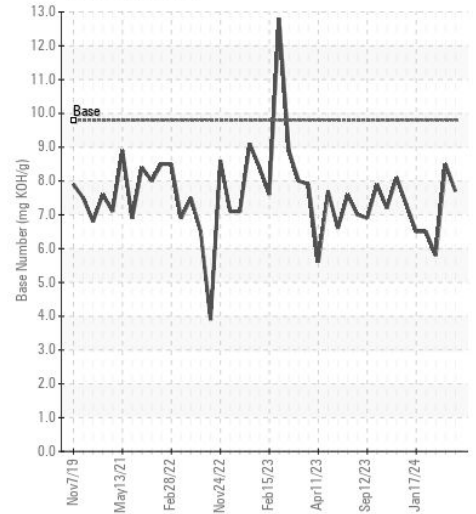

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0118075
Lab Number : 06161111
Unique Number : 10996534
Test Package : FLEET

Received : 25 Apr 2024
Tested : 29 Apr 2024
Diagnosed : 29 Apr 2024 - Don Baldrige

GFL Environmental - 010 - Stockbridge
 1280 Rum Creek Parkway
 Stockbridge, GA
 US 30281
 Contact: JOSHUA TINKER
 joshuatinker@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: