



WEAR
CONTAMINATION
FLUID CONDITION

ATTENTION
ABNORMAL
ATTENTION

Machine Id
ISUZU Charlotte CML
Component
Diesel Engine
Fluid
MOBIL DELVAC 1300 SUPER15W40 (11 QTS)

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0033648	---	---
Sample Date		Client Info		28 Mar 2024	---	---
Machine Age	hrs	Client Info		11828	---	---
Oil Age	hrs	Client Info		11828	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	87	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	16	---	---
Lead	ppm	ASTM D5185m	>40	5	---	---
Copper	ppm	ASTM D5185m	>330	249	---	---
Tin	ppm	ASTM D5185m	>15	5	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. Tests indicate that there is no fuel present in the oil.

Silicon	ppm	ASTM D5185m	>25	50	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Fuel	%	ASTM D3524	>5	0.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.4	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.8	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m	0	103	---	---
Barium	ppm	ASTM D5185m	0	8	---	---
Molybdenum	ppm	ASTM D5185m	0	24	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m	0	209	---	---
Calcium	ppm	ASTM D5185m		1128	---	---
Phosphorus	ppm	ASTM D5185m		897	---	---
Zinc	ppm	ASTM D5185m		1116	---	---
Sulfur	ppm	ASTM D5185m		3225	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	5.4	---	---
Visc @ 100°C	cSt	ASTM D445	14	10.3	---	---

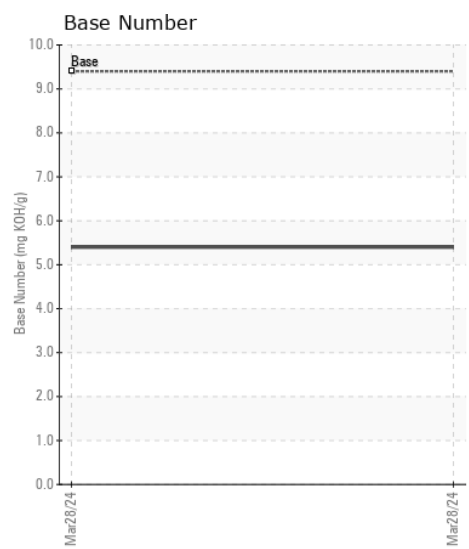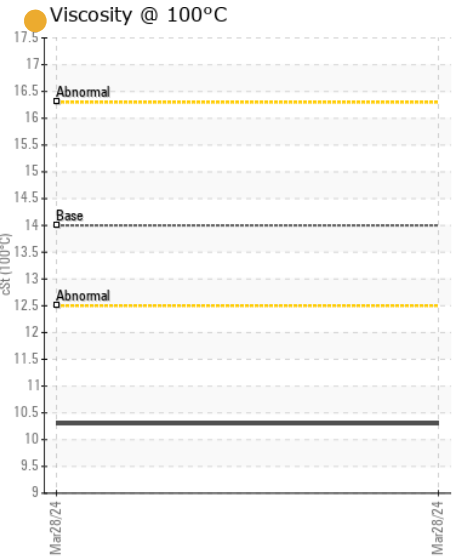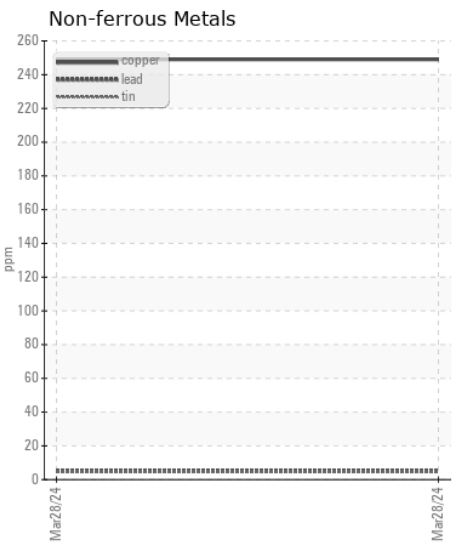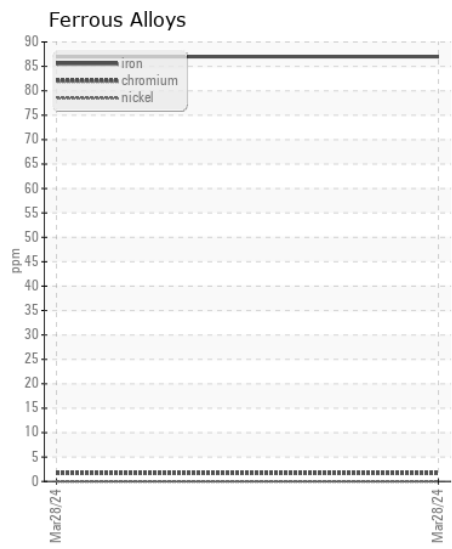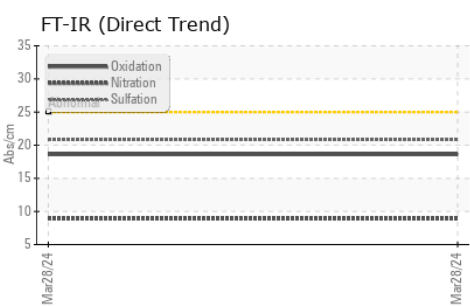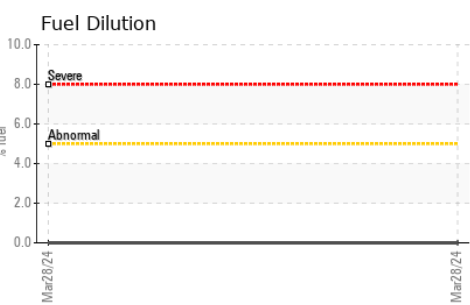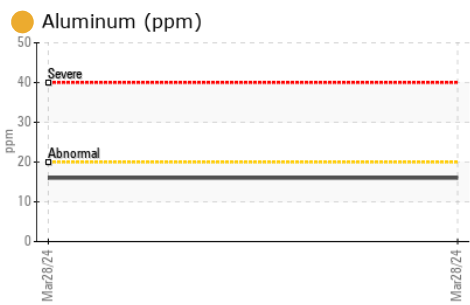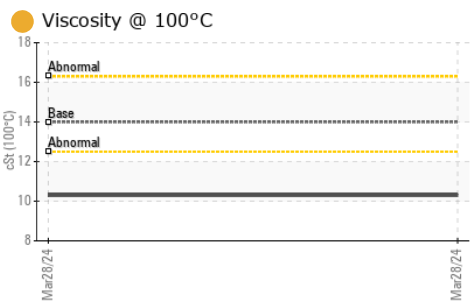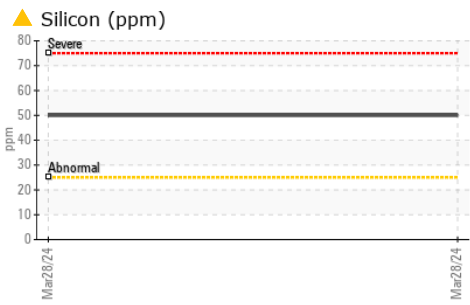

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0033648
Lab Number : 06161185
Unique Number : 10996608
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

RUSH TRUCK LEASING - CHARLOTTE IDEALEASE
 1333 AMERON DR
 CHARLOTTE, NC
 US 28206
 Contact: JERRY DIXON
 dixonj@rushenterprises.com
 T: (704)333-4507
 F: (704)333-4508

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)