



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
INTERNATIONAL 441346
Component
Diesel Engine
Fluid
MOBIL DELVAC 1300 SUPER15W40 (20 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0033816	IL0030605	IL0030523
Sample Date		Client Info		25 Apr 2024	28 Mar 2024	17 Nov 2023
Machine Age	hrs	Client Info		11397	0	383708
Oil Age	hrs	Client Info		0	0	383708
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	16	14	14
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	8	10	6
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	1	6	<1
Tin	ppm	ASTM D5185m	>15	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	5	5	4
Potassium	ppm	ASTM D5185m	>20	1	4	5
Fuel		WC Method	>2.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.8	0.8	0.7
Nitration	Abs/cm	*ASTM D7624	>20	9.3	9.3	9.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.2	20.1	20.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	<1	1
Boron	ppm	ASTM D5185m	0	1	4	3
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	65	61	63
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	0	1032	950	920
Calcium	ppm	ASTM D5185m		1161	1057	1029
Phosphorus	ppm	ASTM D5185m		1096	1028	1005
Zinc	ppm	ASTM D5185m		1314	1256	1218
Sulfur	ppm	ASTM D5185m		3775	3519	3067
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.6	16.4	16.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	8.9	9.0	7.7
Visc @ 100°C	cSt	ASTM D445	14	13.1	12.8	12.9


FT-IR (Direct Trend)

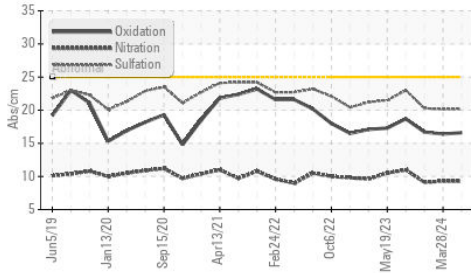


Base Number

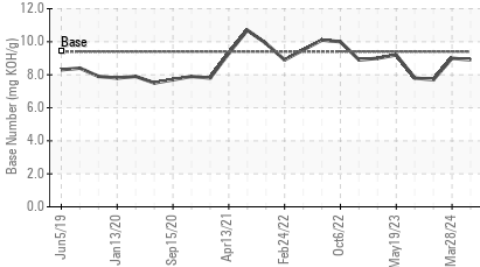


Viscosity @ 100°C

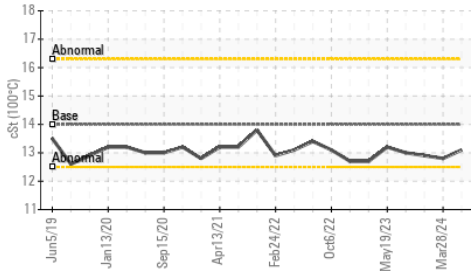


Ferrous Alloys

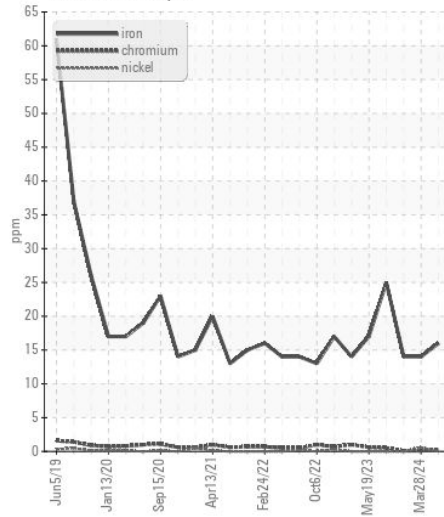


Non-ferrous Metals

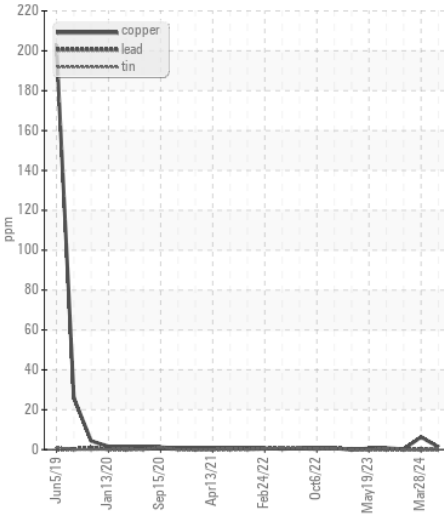

Viscosity @ 100°C

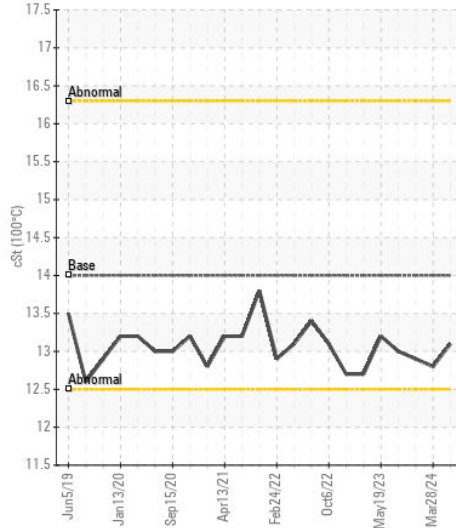

Base Number

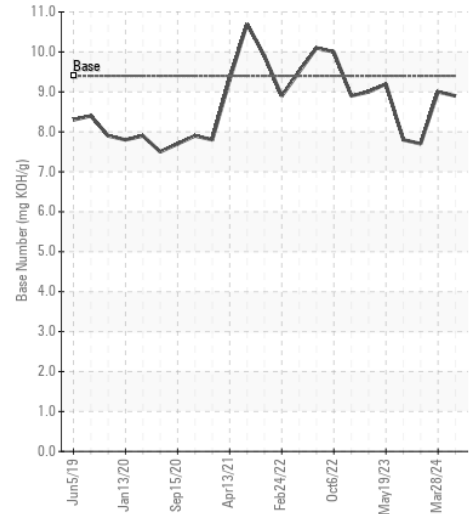

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : IL0033816

Lab Number : 06161188

Unique Number : 10996611

Test Package : FLEET

Received : 26 Apr 2024

Tested : 26 Apr 2024

Diagnosed : 29 Apr 2024 - Sean Felton

RUSH TRUCK LEASING - CHARLOTTE IDEALEASE

1333 AMERON DR

CHARLOTTE, NC

US 28206

Contact: JERRY DIXON

dixonj@rushenterprises.com

T: (704)333-4507

F: (704)333-4508

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)