



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id  
**VOLVO L70H 624755**  
Component  
**Diesel Engine**  
Fluid  
**VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0004800	VCP424047	VCP424085
Sample Date		Client Info		18 Apr 2024	15 Sep 2023	14 Sep 2023
Machine Age	hrs	Client Info		1477	2430	996
Oil Age	hrs	Client Info		500	0	0
Filter Age	hrs	Client Info		500	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	12	9	17
Chromium	ppm	ASTM D5185m	>10	1	1	<1
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	6	5	4
Lead	ppm	ASTM D5185m	>20	<1	0	0
Copper	ppm	ASTM D5185m	>15	1	1	2
Tin	ppm	ASTM D5185m	>10	1	<1	1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

### CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	7	▲ 21	9
Potassium	ppm	ASTM D5185m	>20	2	2	<1
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.0	6.5	6.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.2	21.5	21.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	2
Boron	ppm	ASTM D5185m	2.5	62	46	49
Barium	ppm	ASTM D5185m	0.0	2	0	0
Molybdenum	ppm	ASTM D5185m	0.7	38	40	39
Manganese	ppm	ASTM D5185m	0.0	<1	<1	1
Magnesium	ppm	ASTM D5185m	256	485	518	524
Calcium	ppm	ASTM D5185m	2057	1580	1759	1774
Phosphorus	ppm	ASTM D5185m	935	927	934	916
Zinc	ppm	ASTM D5185m	1223	1085	1166	1130
Sulfur	ppm	ASTM D5185m	4079	3252	3594	3751
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.4	20.0	19.7
Base Number (BN)	mg KOH/g	ASTM D2896	10	10.2	10.4	10.6
Visc @ 100°C	cSt	ASTM D445	15.0	12.8	13.1	12.9

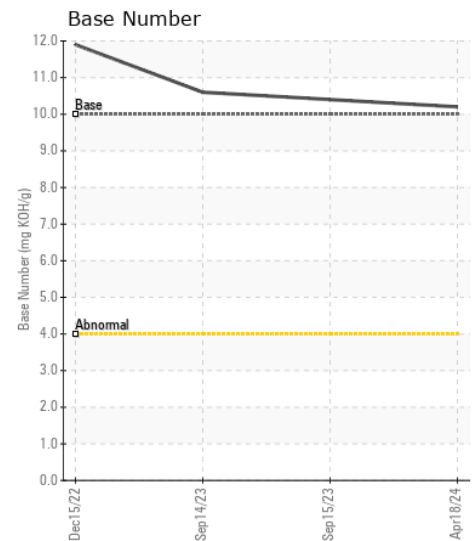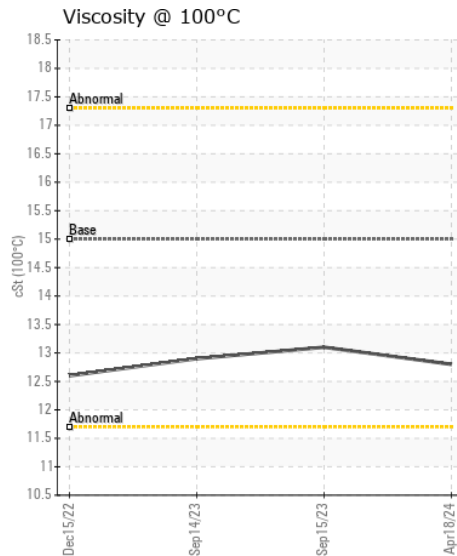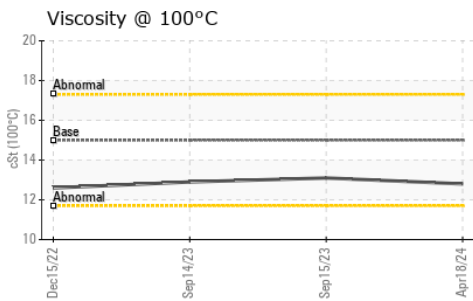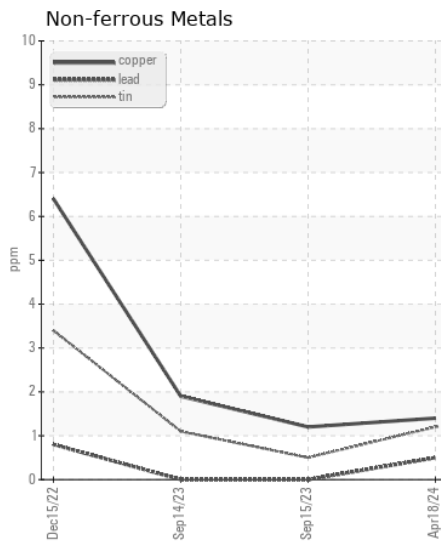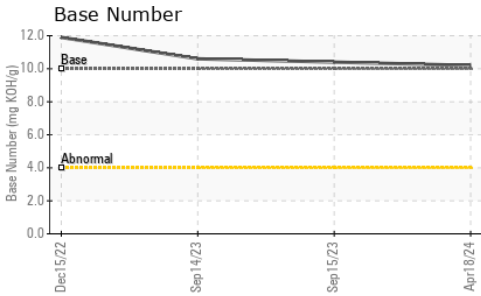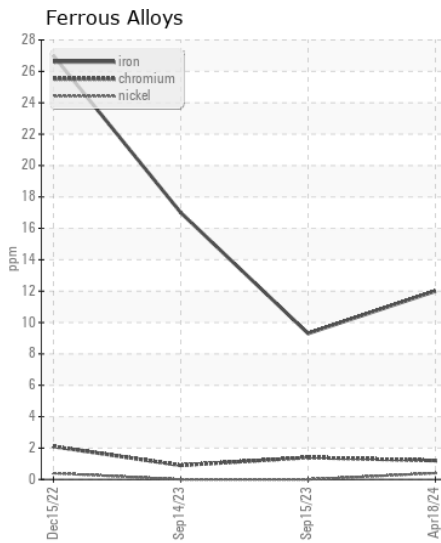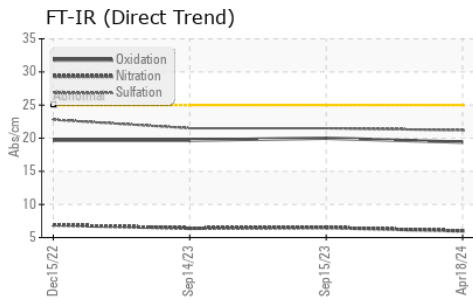

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0004800  
**Lab Number** : 06161288  
**Unique Number** : 10996711  
**Test Package** : CONST ( Additional Tests: TBN )

**Received** : 26 Apr 2024  
**Tested** : 28 Apr 2024  
**Diagnosed** : 28 Apr 2024 - Wes Davis

**365 - ASCENDUM MACHINERY INC - SAVANNAH**  
 54 MEDLINE DR  
 RICHMOND HILL, GA  
 US 31324  
 Contact: JESSE WILSON  
 jesse.wilson@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (912)964-9515