



WEAR	<b>ATTENTION</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[W66260]**

Machine Id  
**JOHN DEERE 350G 1FF350GXCMF815215**

Component  
**Left Final Drive**

Fluid  
**JOHN DEERE GL-5 80W90 (3 GAL)**

### RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. ( Customer Sample Comment: W66260 )

### WEAR

All component wear rates are normal.









### CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0205507</b>	JR0171132	JR0142328
Sample Date		Client Info		<b>23 Apr 2024</b>	13 Jun 2023	02 Mar 2023
Machine Age	hrs	Client Info		<b>3842</b>	3028	2474
Oil Age	hrs	Client Info		<b>3288</b>	554	500
Filter Age	hrs	Client Info		<b>0</b>	0	500
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	Changed
Sample Status				<b>ABNORMAL</b>	NORMAL	NORMAL
PQ		ASTM D8184	>1250	<b>530</b>	26	52
Iron	ppm	ASTM D5185m	>750	<b>1023</b>	36	65
Chromium	ppm	ASTM D5185m	>9	<b>13</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>2</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>5</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>61</b>	2	<1
Lead	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>40	<b>2</b>	0	<1
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silicon	ppm	ASTM D5185m	>75	<b>242</b>	2	2
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	1	0
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG
Sodium	ppm	ASTM D5185m	>51	<b>1</b>	<1	<1
Boron	ppm	ASTM D5185m		<b>195</b>	82	201
Barium	ppm	ASTM D5185m		<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>1</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>13</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>5</b>	<1	1
Calcium	ppm	ASTM D5185m		<b>17</b>	10	23
Phosphorus	ppm	ASTM D5185m		<b>953</b>	655	923
Zinc	ppm	ASTM D5185m		<b>16</b>	0	10
Sulfur	ppm	ASTM D5185m		<b>19541</b>	24738	20494
Visc @ 40°C	cSt	ASTM D445		<b>145</b>	141	143

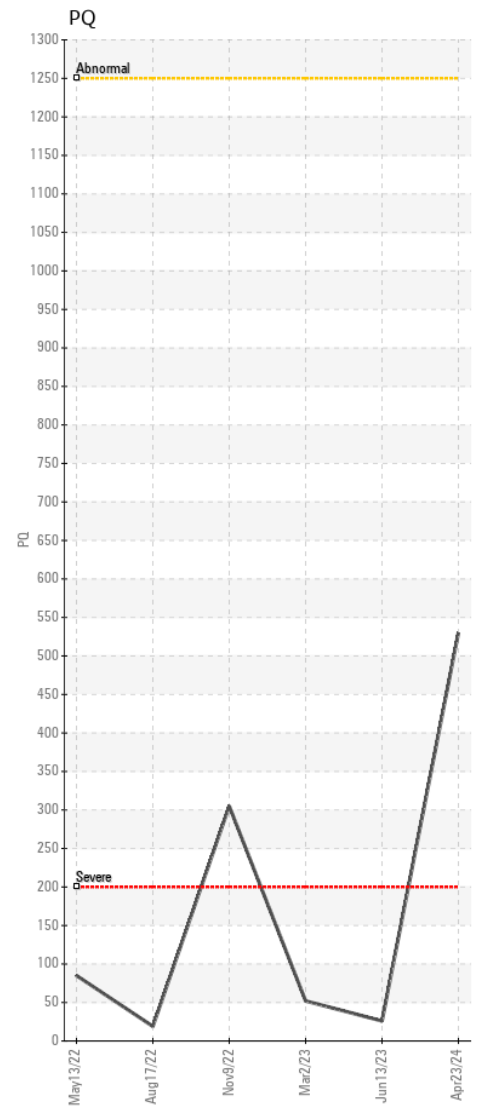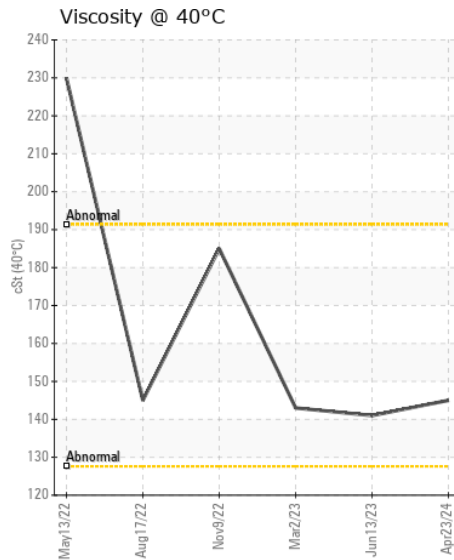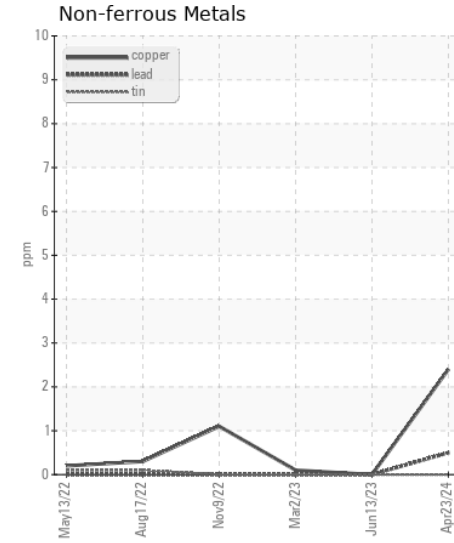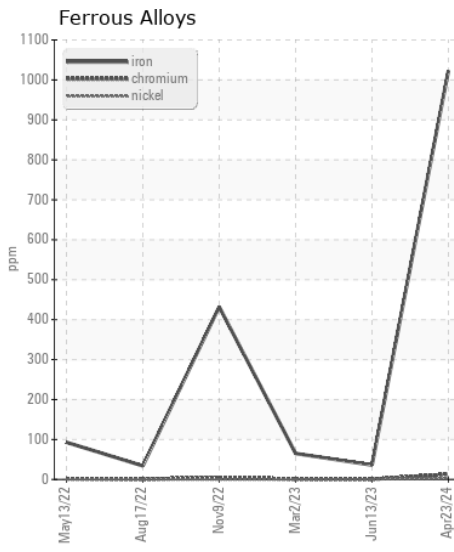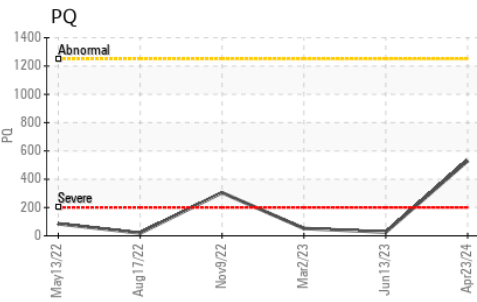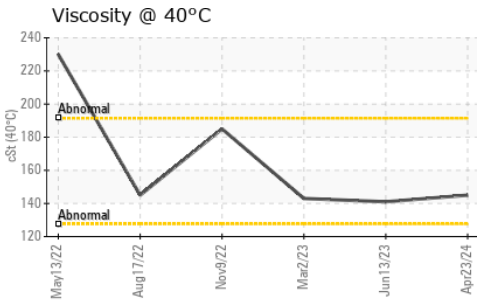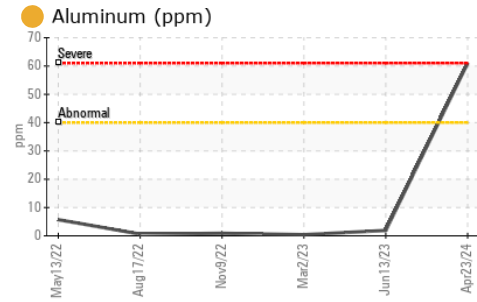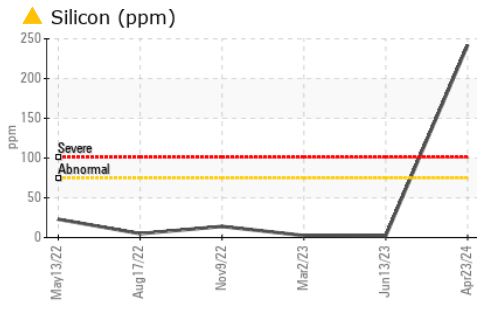

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0205507 **Received** : 26 Apr 2024  
**Lab Number** : 06161736 **Tested** : 28 Apr 2024  
**Unique Number** : 10997159 **Diagnosed** : 29 Apr 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - CHARLOTTE**  
 9550 STATESVILLE ROAD  
 CHARLOTTE, NC  
 US 28269  
 Contact: CHARLOTTE SHOP  
 myoung@jamesriverequipment.com  
 T: (704)597-0211  
 F: (704)596-6198

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)