

Machine Id
48
Component
Natural Gas Engine
Fluid
PETRO CANADA SENTRON LD 3000 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0112037	PCA0117152	PCA0117182
Sample Date		Client Info		01 May 2024	01 Apr 2024	04 Mar 2024
Machine Age	hrs	Client Info		99126	98414	97749
Oil Age	hrs	Client Info		327	5407	4742
Filter Age	hrs	Client Info		327	5407	4742
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	2	9	3
Chromium	ppm	ASTM D5185m	>4	<1	1	0
Nickel	ppm	ASTM D5185m	>2	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>9	<1	1	2
Lead	ppm	ASTM D5185m	>30	1	3	<1
Copper	ppm	ASTM D5185m	>35	3	2	<1
Tin	ppm	ASTM D5185m	>4	<1	1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION













Tests indicate that there is no fuel present in the oil. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>+100	2	4	2
Potassium	ppm	ASTM D5185m	>20	6	37	1
Fuel	%	ASTM D3524	>4.0	0.0	0.2	0.2
Water		WC Method	>0.1	NEG	NEG	NEG
Soot %	%	*ASTM D7844		0	0	0
Nitration	Abs/cm	*ASTM D7624	>20	4.0	9.4	5.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	13.7	19.5	16.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	7	2
Boron	ppm	ASTM D5185m	5	0	0	0
Barium	ppm	ASTM D5185m	1	0	0	0
Molybdenum	ppm	ASTM D5185m	2	2	6	<1
Manganese	ppm	ASTM D5185m	1	<1	1	<1
Magnesium	ppm	ASTM D5185m	5	8	9	10
Calcium	ppm	ASTM D5185m	1220	1257	1383	1410
Phosphorus	ppm	ASTM D5185m	298	291	315	303
Zinc	ppm	ASTM D5185m	350	343	359	394
Sulfur	ppm	ASTM D5185m	1995	2744	2521	2405
Oxidation	Abs/.1mm	*ASTM D7414	>25	7.8	15.7	10.1
Acid Number (AN)	mg KOH/g	ASTM D8045	0.86	0.19	▲ 2.07	1.70
Base Number (BN)	mg KOH/g	ASTM D2896	3.9	3.89	▲ 1.91	1.98
Visc @ 100°C	cSt	ASTM D445	13.7	13.1	13.9	13.7

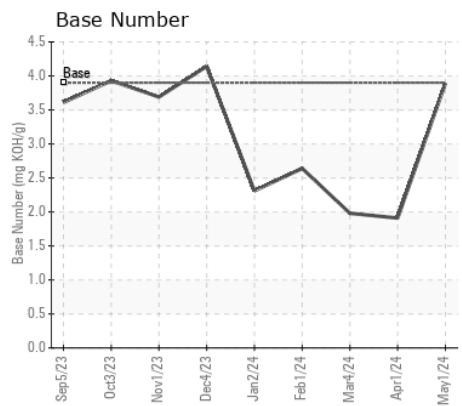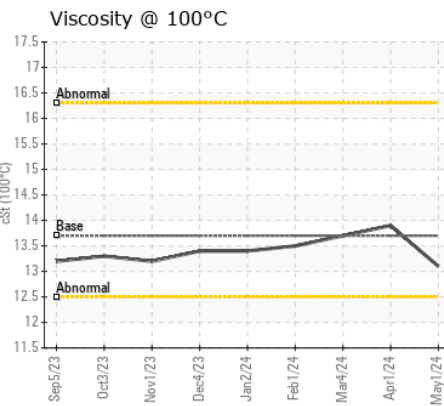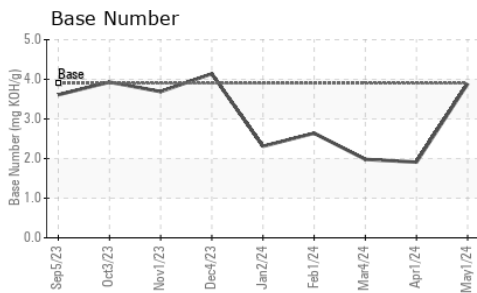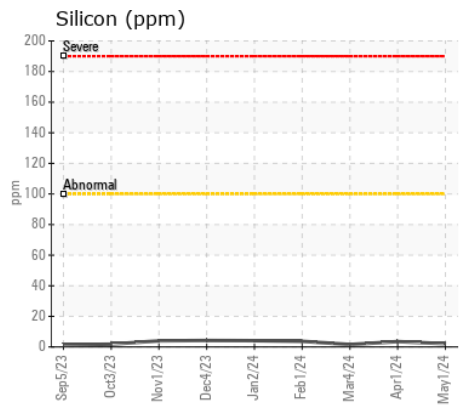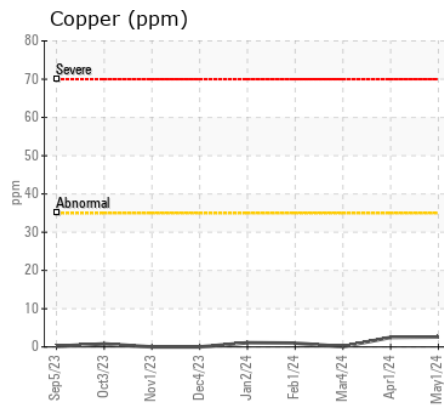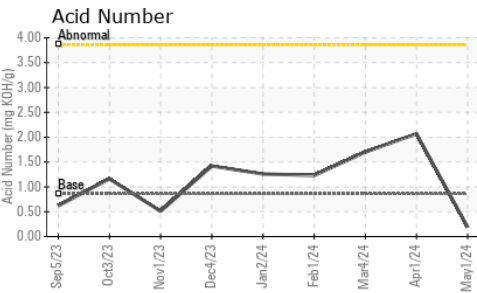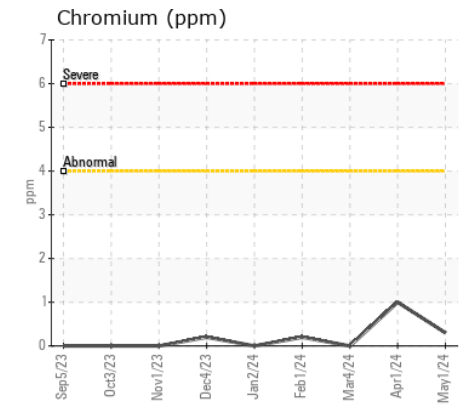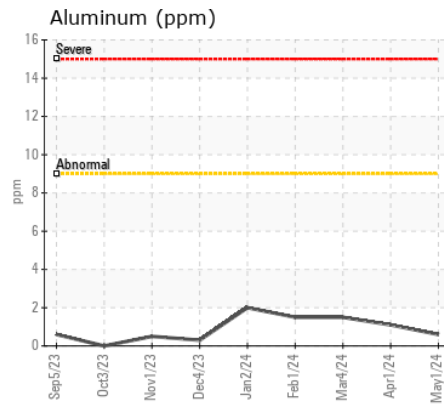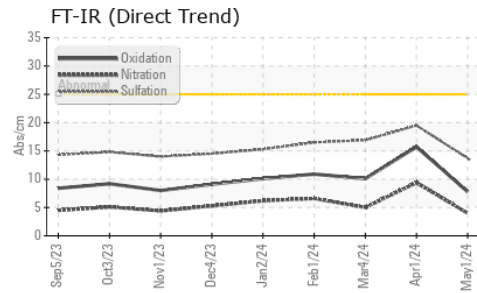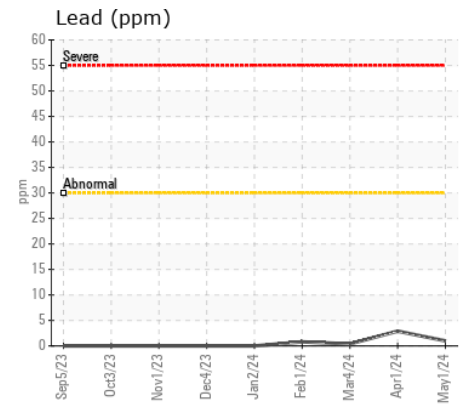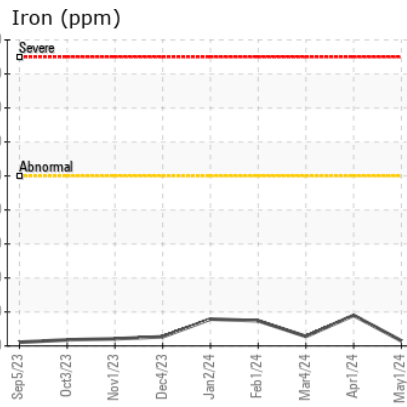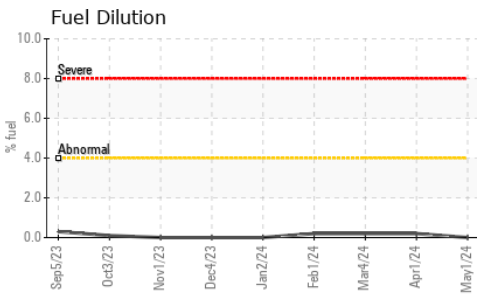

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0112037
Lab Number : 06174054
Unique Number : 11020107
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

Received : 09 May 2024
Tested : 15 May 2024
Diagnosed : 15 May 2024 - Wes Davis

ENERVEST OPERATING - POPLAR GAP A
 1618 CRESCENT ROAD
 GRUNDY, VA
 US 24614
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: