



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**SOUTH HOLLAND**  
Machine Id  
**JLG 600S PL2705 (S/N 262705)**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL 10W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>HPL0005129</b>	HPL008268	---
Sample Date		Client Info		<b>06 May 2024</b>	08 Oct 2022	---
Machine Age	hrs	Client Info		<b>1864</b>	1294	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>23</b>	29	---
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	2	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>10</b>	7	---
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>330	<b>4</b>	4	---
Tin	ppm	ASTM D5185m	>15	<b>1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>13</b>	13	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>17.9</b>	17.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>41.4</b>	36.5	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	<1	---
Boron	ppm	ASTM D5185m	250	<b>17</b>	166	---
Barium	ppm	ASTM D5185m	10	<b>0</b>	4	---
Molybdenum	ppm	ASTM D5185m	100	<b>555</b>	624	---
Manganese	ppm	ASTM D5185m		<b>1</b>	1	---
Magnesium	ppm	ASTM D5185m	450	<b>867</b>	440	---
Calcium	ppm	ASTM D5185m	3000	<b>2638</b>	3689	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1023</b>	831	---
Zinc	ppm	ASTM D5185m	1350	<b>1185</b>	1014	---
Sulfur	ppm	ASTM D5185m	4250	<b>8998</b>	17969	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>49.4</b>	31.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>12.78</b>	11.4	---
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.7</b>	14.3	---

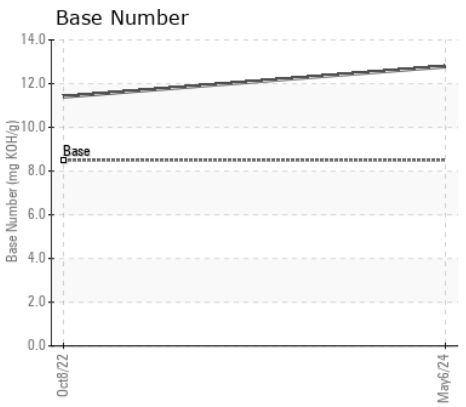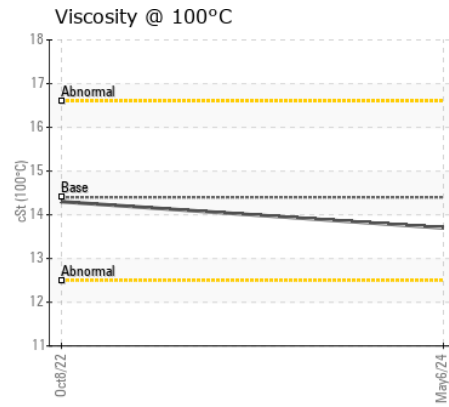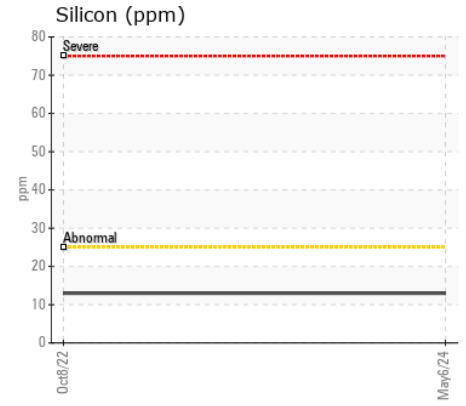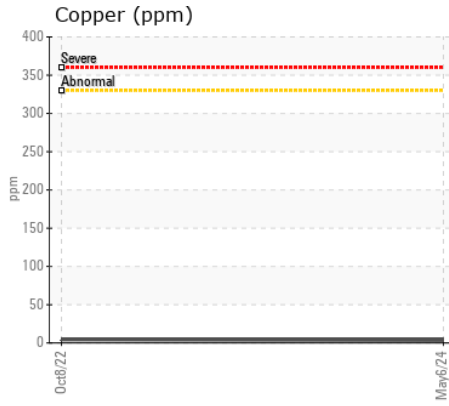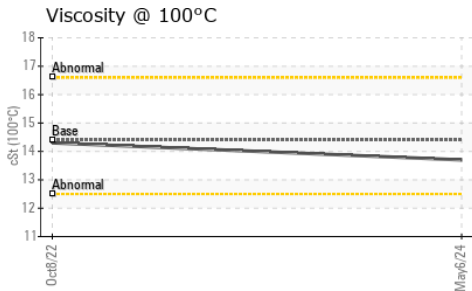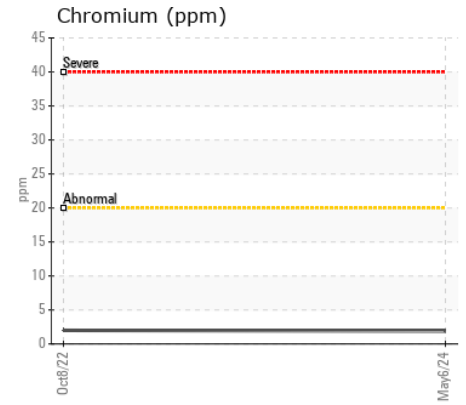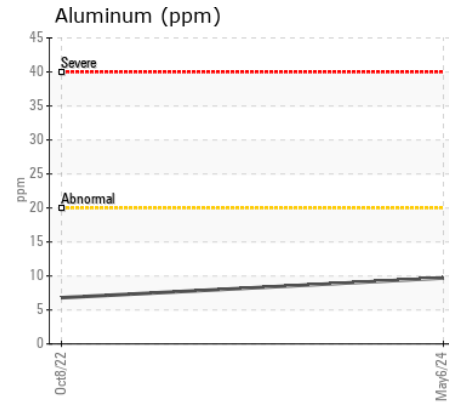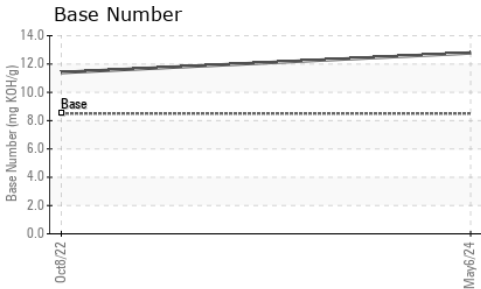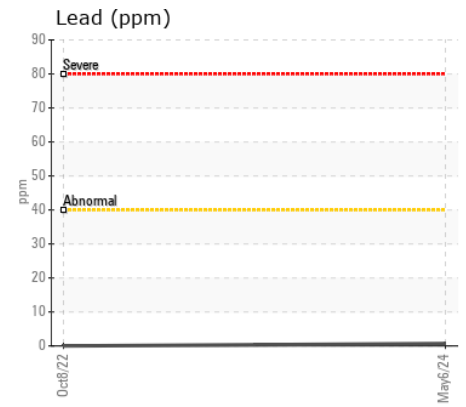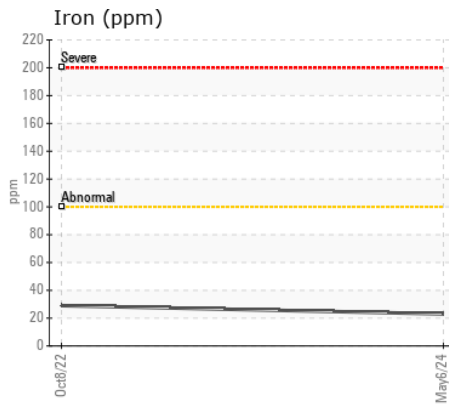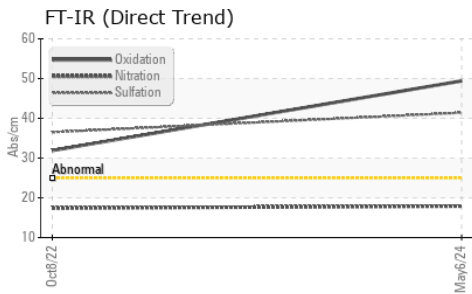

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : HPL0005129 **Received** : 09 May 2024  
**Lab Number** : 06174064 **Tested** : 10 May 2024  
**Unique Number** : 11020117 **Diagnosed** : 12 May 2024 - Don Baldrige  
**Test Package** : MOB 2

**STEVENS ON CRANE**  
 410 STEVENSON DR  
 BOLINGBROOK, IL  
 US 60440

Contact: DAVE KOEHNE  
 davidk@stevensoncrane.com

T: (630)972-9199

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)