



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FORD COFFMAN - RED
 Component
Diesel Engine
 Fluid
TRC PRO-SPEC III SYNTHETIC BLEND 15W40 (13 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06174075	TR05949426	---
Sample Date		Client Info		08 May 2024	12 Sep 2023	---
Machine Age	mls	Client Info		139517	130036	---
Oil Age	mls	Client Info		9184	8855	---
Filter Age	mls	Client Info		9184	8855	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	15	14	---
Chromium	ppm	ASTM D5185m	>20	1	<1	---
Nickel	ppm	ASTM D5185m	>2	<1	0	---
Titanium	ppm	ASTM D5185m	>2	<1	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>25	3	2	---
Lead	ppm	ASTM D5185m	>40	<1	0	---
Copper	ppm	ASTM D5185m	>330	1	0	---
Tin	ppm	ASTM D5185m	>15	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	13	10	---
Potassium	ppm	ASTM D5185m	>20	13	10	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	7.0	6.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.0	17.2	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	4	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		8	0	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m		31	26	---
Calcium	ppm	ASTM D5185m		5083	5388	---
Phosphorus	ppm	ASTM D5185m		1062	1055	---
Zinc	ppm	ASTM D5185m		1179	1271	---
Sulfur	ppm	ASTM D5185m		5017	5533	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	10.2	9.3	---
Base Number (BN)	mg KOH/g	ASTM D2896		14.06	13.97	---
Visc @ 100°C	cSt	ASTM D445	15.5	14.0	14.1	---

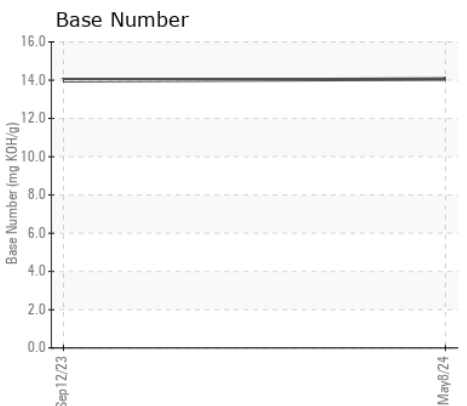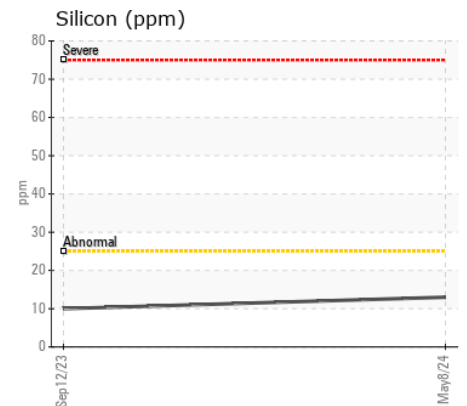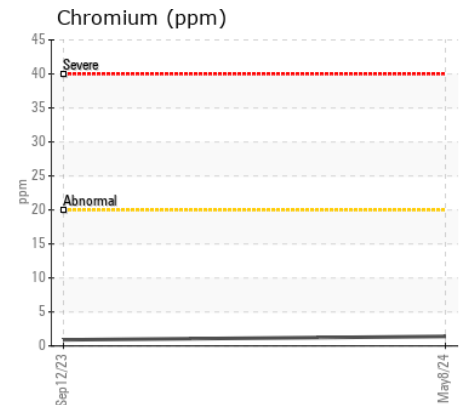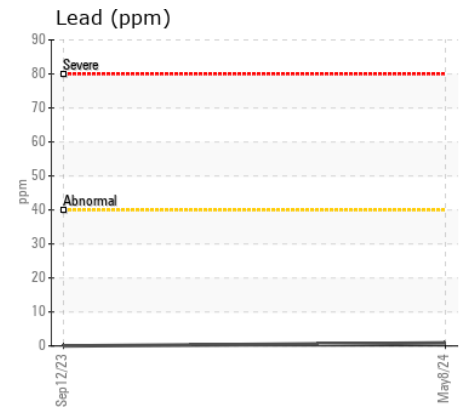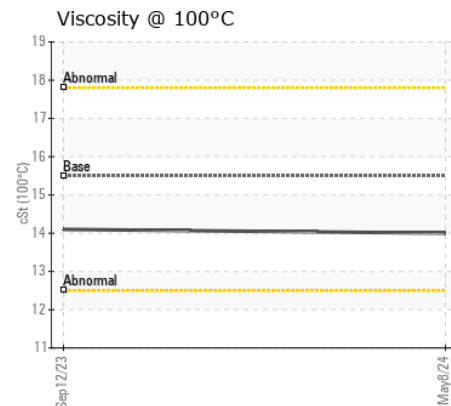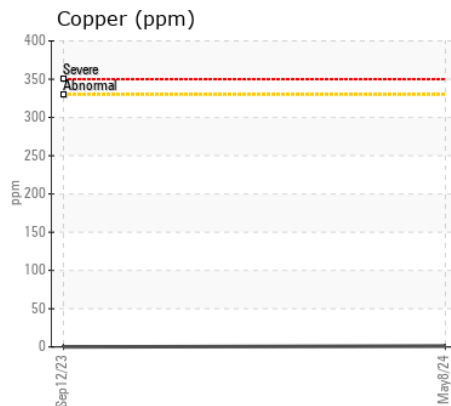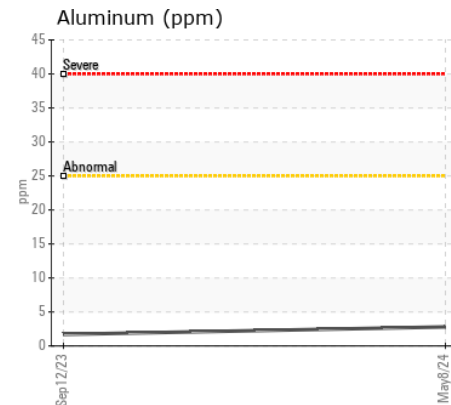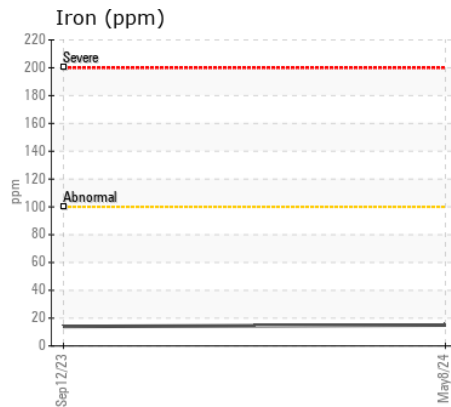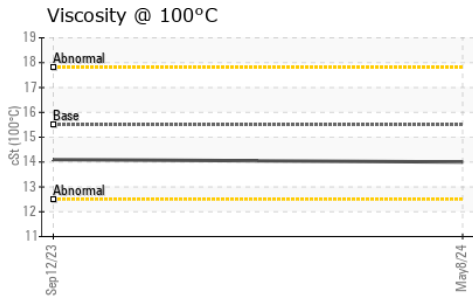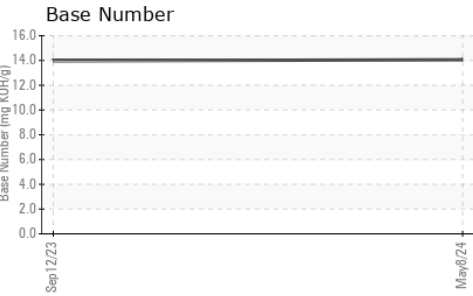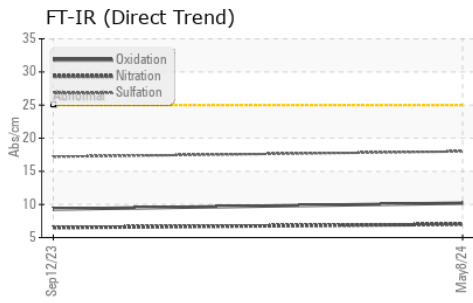

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06174075
Lab Number : 06174075
Unique Number : 11020128
Test Package : MOB 2

Received : 09 May 2024
Tested : 10 May 2024
Diagnosed : 10 May 2024 - Wes Davis

COFFMAN INDUSTRIES
 10800 CEMETERY RD
 CANYON, TX
 US 79015
 Contact: MIKE LEWIS

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (806)655-2577
 F: (806)655-2577