



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FORD CHARLIE BRADLEY
 Component
Front Gasoline Engine
 Fluid
TRC PRO-SPEC SYNTHETIC 5W30 (8 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06174080	---	---
Sample Date		Client Info		26 Apr 2024	---	---
Machine Age	mls	Client Info		12676	---	---
Oil Age	mls	Client Info		10051	---	---
Filter Age	mls	Client Info		10051	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	16	---	---
Chromium	ppm	ASTM D5185m	>20	1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>40	4	---	---
Lead	ppm	ASTM D5185m	>50	1	---	---
Copper	ppm	ASTM D5185m	>155	10	---	---
Tin	ppm	ASTM D5185m	>10	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	26	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	14.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	4	---	---
Boron	ppm	ASTM D5185m		8	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m	400	18	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	600	57	---	---
Calcium	ppm	ASTM D5185m	1500	3985	---	---
Phosphorus	ppm	ASTM D5185m	800	1008	---	---
Zinc	ppm	ASTM D5185m	900	1158	---	---
Sulfur	ppm	ASTM D5185m		4522	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	10.16	---	---
Visc @ 100°C	cSt	ASTM D445	10.5	10.9	---	---

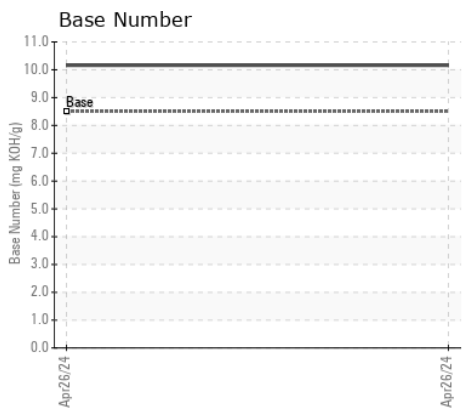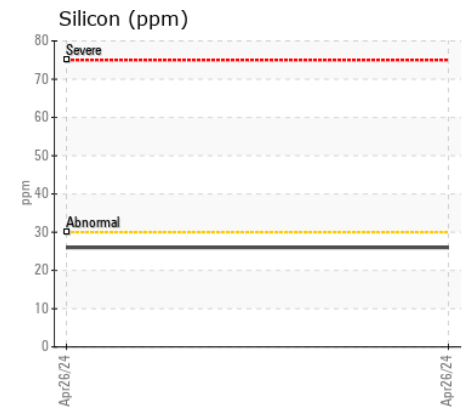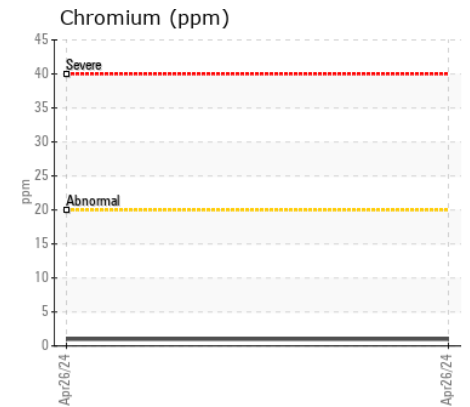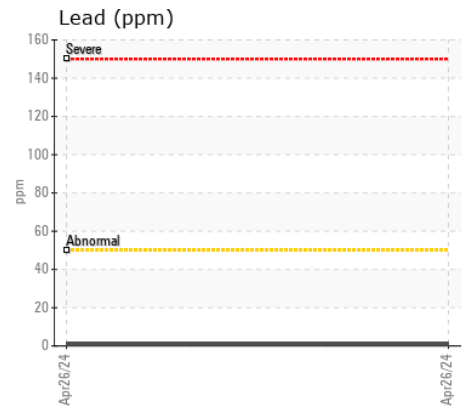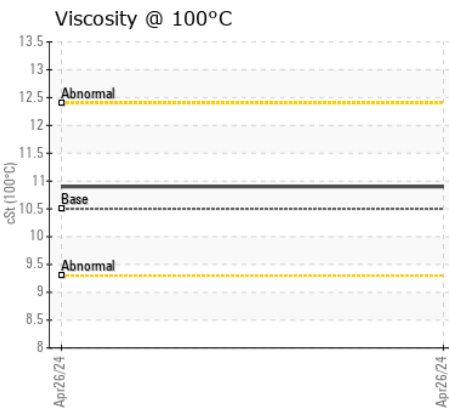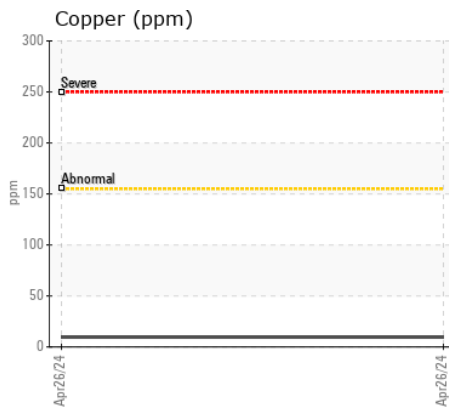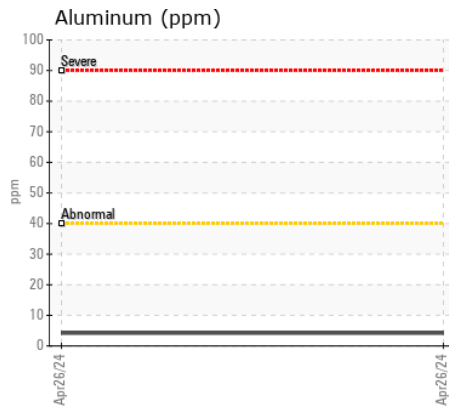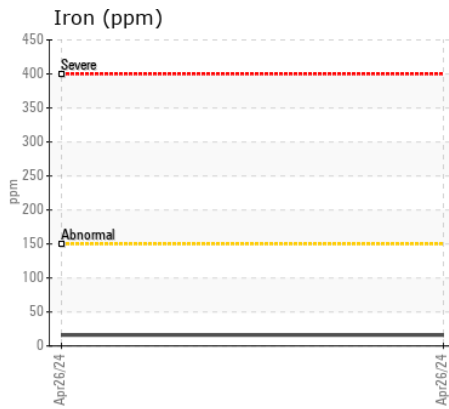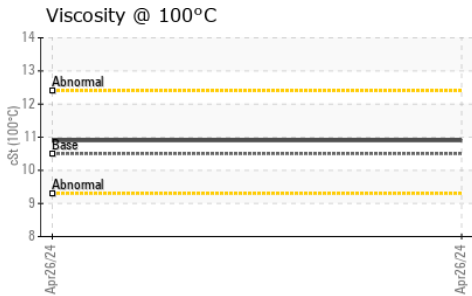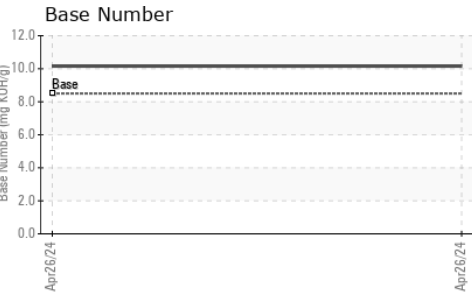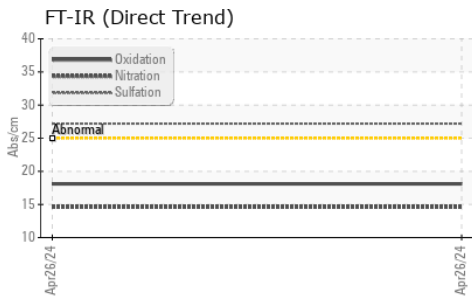

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : TR06174080

Lab Number : 06174080

Unique Number : 11020133

Test Package : MOB 2

Received : 09 May 2024

Tested : 10 May 2024

Diagnosed : 12 May 2024 - Don Baldrige

COFFMAN INDUSTRIES

10800 CEMETERY RD

CANYON, TX

US 79015

Contact: MIKE LEWIS

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: (806)655-2577