



TRAAP

Texas Refinery Advanced Analysis Program

# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**DODGE 1 DODGE 2500**

Component  
**Gasoline Engine**

Fluid  
**TRC MOLY XL PRO-SPEC IV HD SYN 5W40 (7 QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06174081	---	---
Sample Date		Client Info		04 May 2024	---	---
Machine Age	mls	Client Info		83713	---	---
Oil Age	mls	Client Info		83448	---	---
Filter Age	mls	Client Info		83448	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	33	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>40	3	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>155	28	---	---
Tin	ppm	ASTM D5185m	>10	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	6	---	---
Potassium	ppm	ASTM D5185m	>20	5	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	18.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	31.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	<1	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		3	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		15	---	---
Calcium	ppm	ASTM D5185m	4500	4164	---	---
Phosphorus	ppm	ASTM D5185m		980	---	---
Zinc	ppm	ASTM D5185m	1200	1087	---	---
Sulfur	ppm	ASTM D5185m		4580	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	15	10.03	---	---
Visc @ 100°C	cSt	ASTM D445	15	15.8	---	---

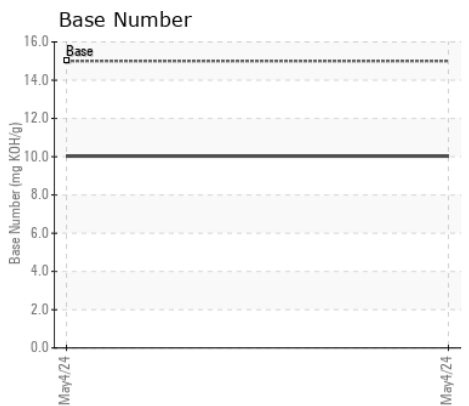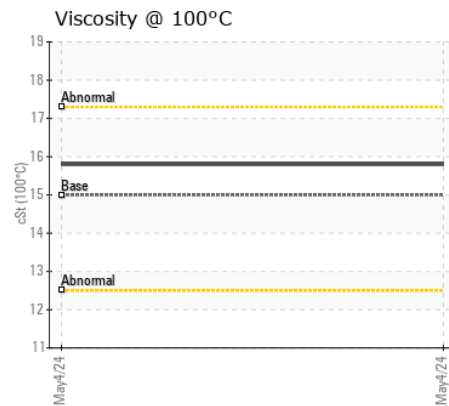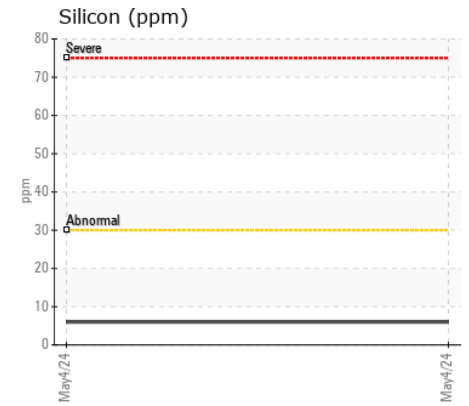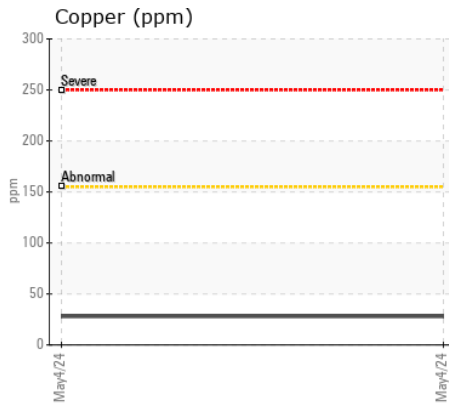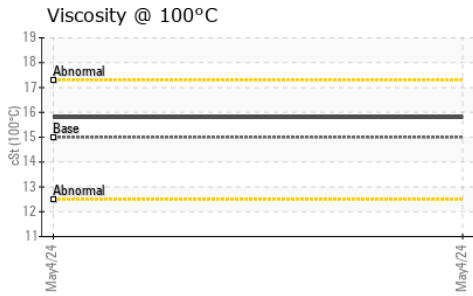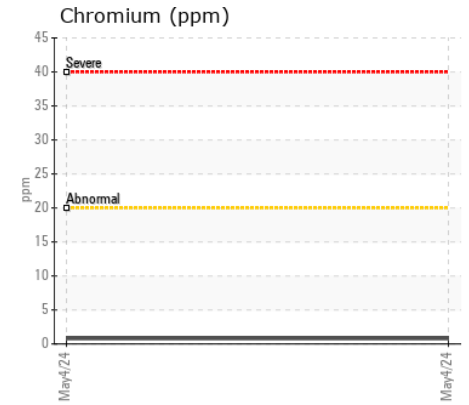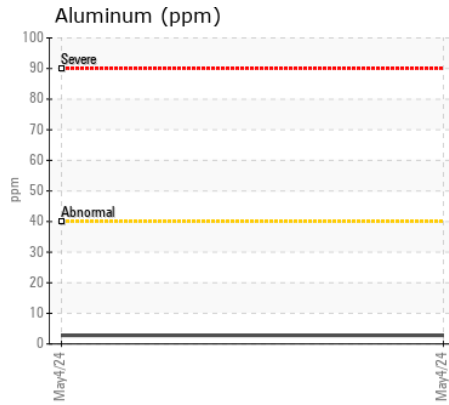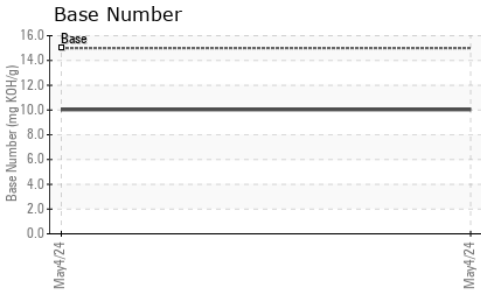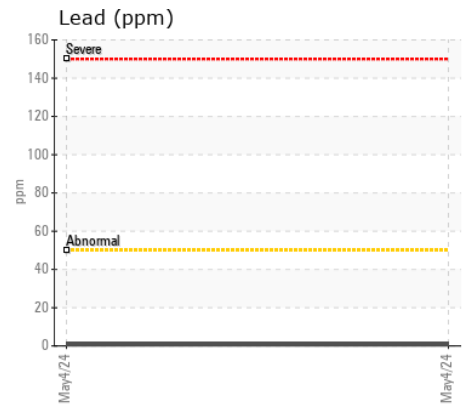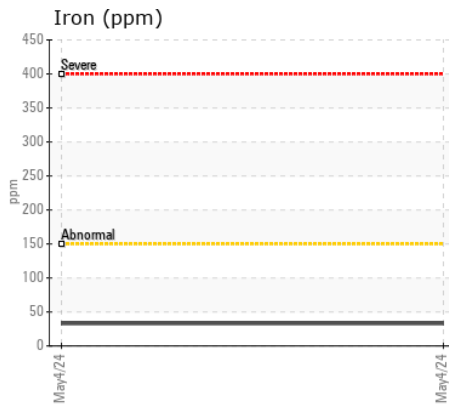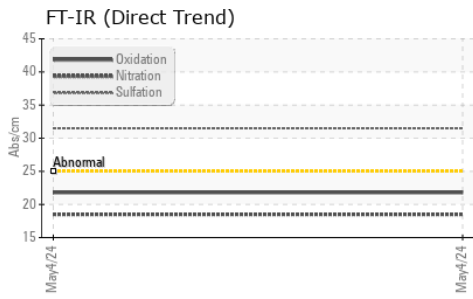

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TR06174081 **Received** : 09 May 2024  
**Lab Number** : 06174081 **Tested** : 10 May 2024  
**Unique Number** : 11020134 **Diagnosed** : 12 May 2024 - Don Baldrige  
**Test Package** : MOB 2

**MERLE WININGS**

CANYON, TX  
 US 79015  
 Contact: MIKE LEWIS

To discuss this sample report, contact Customer Service at 1-800-827-0711.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: