



# OIL ANALYSIS REPORT

WEAR	ATTENTION
CONTAMINATION	ABNORMAL
FLUID CONDITION	ATTENTION



Area  
**Store 4 - Fairmont**  
Machine Id  
**JOHN DEERE 250G 1FF250GXTNF612002**  
Component  
**Right Propel Gearbox**  
Fluid  
**JOHN DEERE GL-5 80W90 (2 GAL)**

## RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0049750	LEC0043925	---
Sample Date		Client Info		06 May 2024	18 Oct 2023	---
Machine Age	hrs	Client Info		1439	665	---
Oil Age	hrs	Client Info		774	665	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		None	None	---
Sample Status				ABNORMAL	NORMAL	---

## WEAR

All component wear rates are normal.

PQ		ASTM D8184		284	319	---
Iron	ppm	ASTM D5185m	>1250	383	168	---
Chromium	ppm	ASTM D5185m	>10	7	5	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		2	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m		37	2	---
Lead	ppm	ASTM D5185m		<1	<1	---
Copper	ppm	ASTM D5185m		<1	1	---
Tin	ppm	ASTM D5185m		<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

## CONTAMINATION










Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m		124	22	---
Potassium	ppm	ASTM D5185m	>20	9	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	LIGHT	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

## FLUID CONDITION

The oil viscosity is lower than normal. This plus the additive levels indicates the addition of a different brand, or type of oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		2	0	---
Boron	ppm	ASTM D5185m		36	83	---
Barium	ppm	ASTM D5185m		3	13	---
Molybdenum	ppm	ASTM D5185m		<1	<1	---
Manganese	ppm	ASTM D5185m		7	5	---
Magnesium	ppm	ASTM D5185m		80	<1	---
Calcium	ppm	ASTM D5185m		2584	26	---
Phosphorus	ppm	ASTM D5185m		914	559	---
Zinc	ppm	ASTM D5185m		937	29	---
Sulfur	ppm	ASTM D5185m		7193	18140	---
Visc @ 40°C	cSt	ASTM D445		71.0	185	---

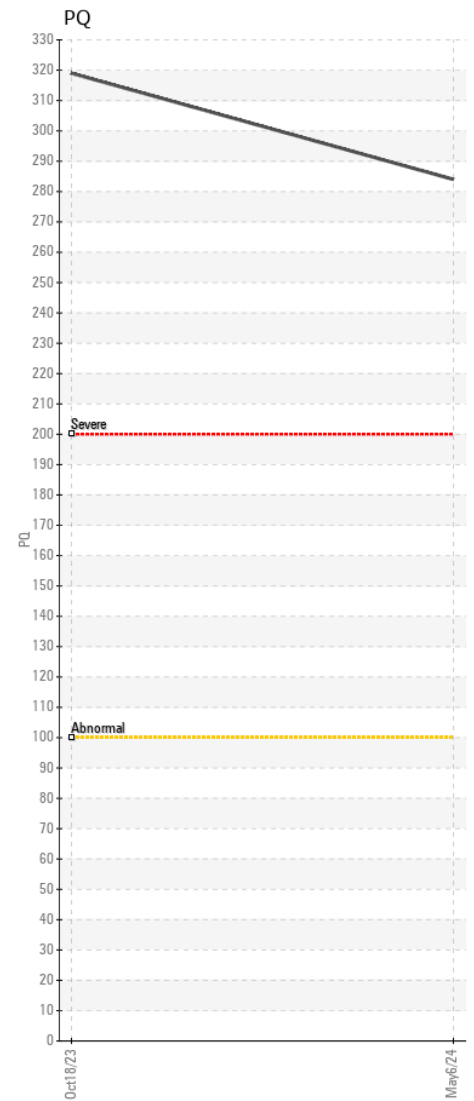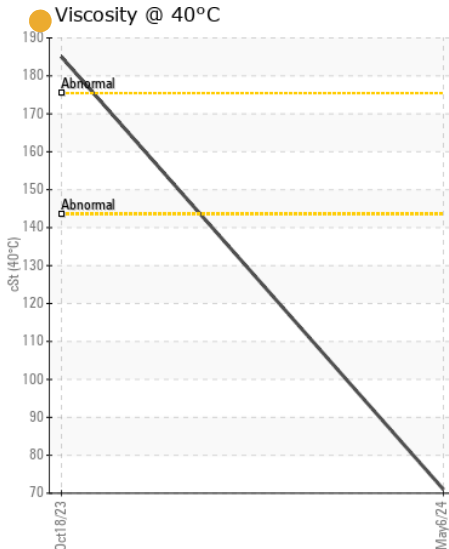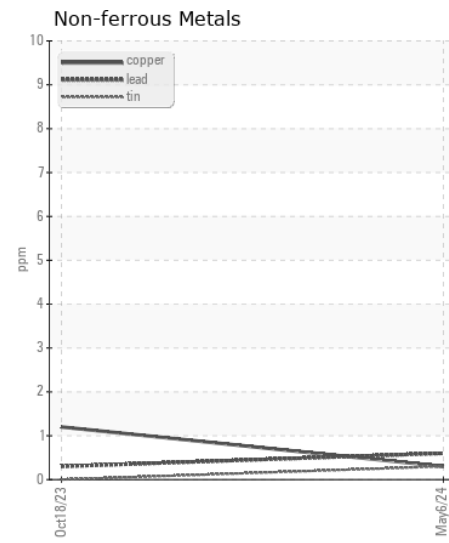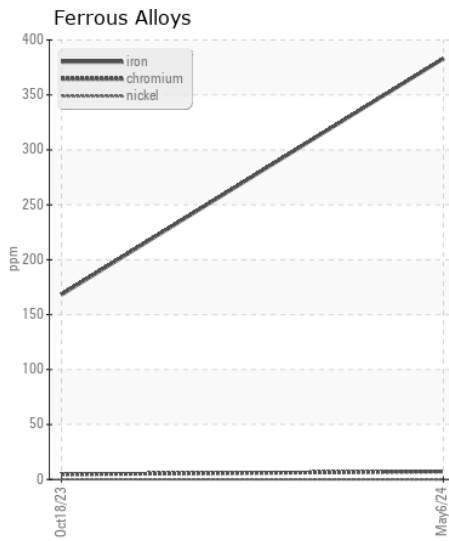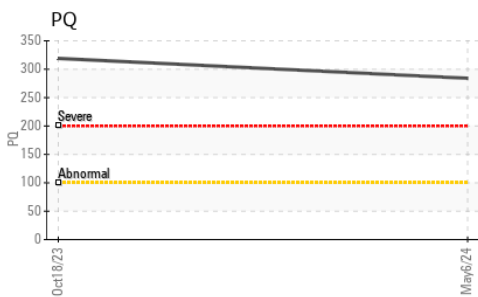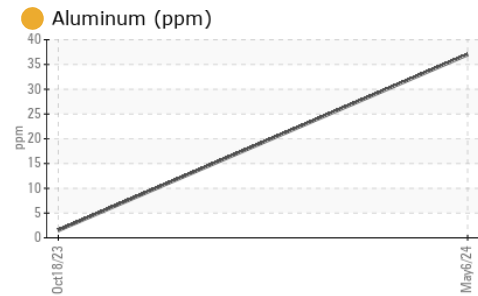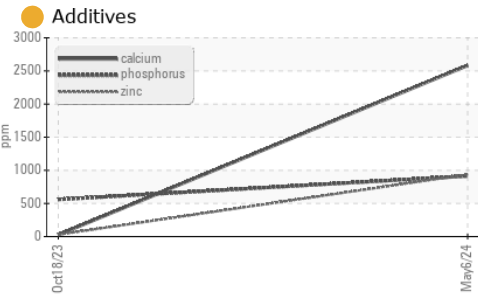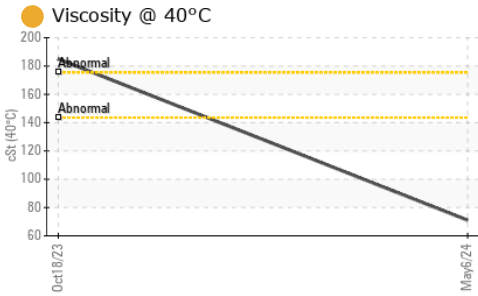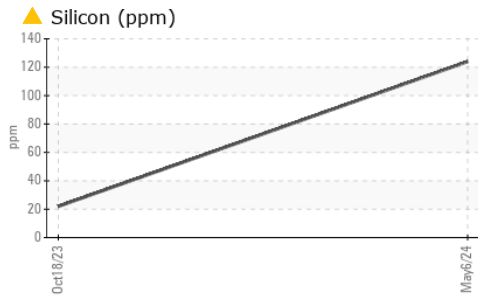

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0049750 **Received** : 09 May 2024  
**Lab Number** : 06174143 **Tested** : 10 May 2024  
**Unique Number** : 11020196 **Diagnosed** : 12 May 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com  
 T:  
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)