



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 160G 1FF160GXKMF058261**  
 Component  
**Swing Drive Gear Case**  
 Fluid  
**JOHN DEERE GL-5 85W140LS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0211450</b>	JR0164285	---
Sample Date		Client Info		<b>07 May 2024</b>	23 Jul 2023	---
Machine Age	hrs	Client Info		<b>2101</b>	1243	---
Oil Age	hrs	Client Info		<b>0</b>	1243	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>21</b>	33	---
Iron	ppm	ASTM D5185m	>200	<b>54</b>	82	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	1	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m		<b>0</b>	<1	---
Lead	ppm	ASTM D5185m		<b>0</b>	0	---
Copper	ppm	ASTM D5185m		<b>0</b>	<1	---
Tin	ppm	ASTM D5185m		<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		<b>6</b>	17	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	2	---
Boron	ppm	ASTM D5185m		<b>14</b>	62	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	5	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	1	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185m		<b>2</b>	<1	---
Calcium	ppm	ASTM D5185m		<b>54</b>	53	---
Phosphorus	ppm	ASTM D5185m		<b>407</b>	561	---
Zinc	ppm	ASTM D5185m		<b>19</b>	26	---
Sulfur	ppm	ASTM D5185m		<b>15938</b>	19635	---
Visc @ 40°C	cSt	ASTM D445	350.7	<b>144</b>	182	---

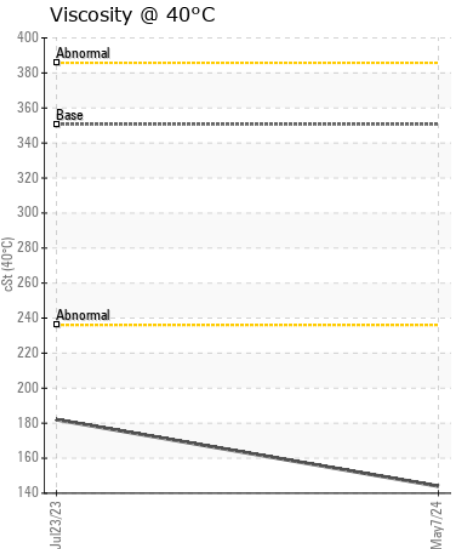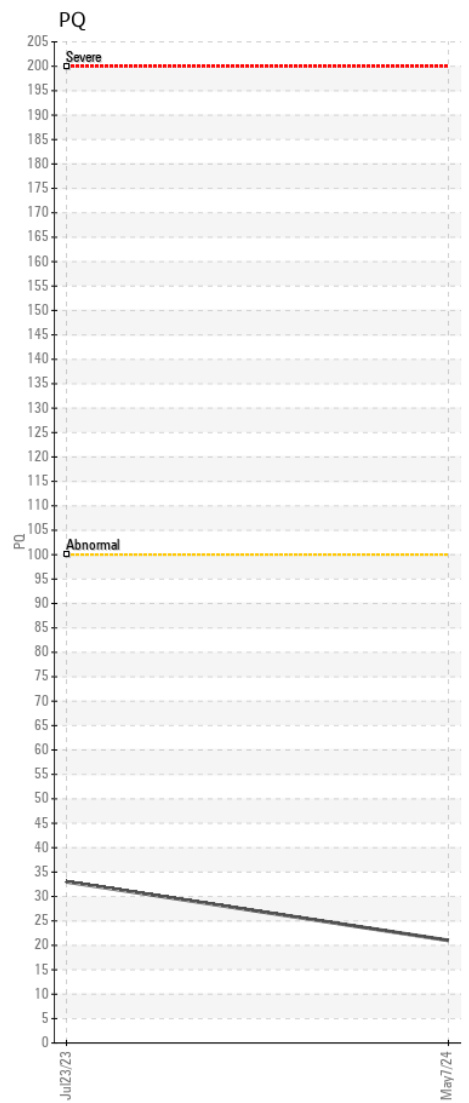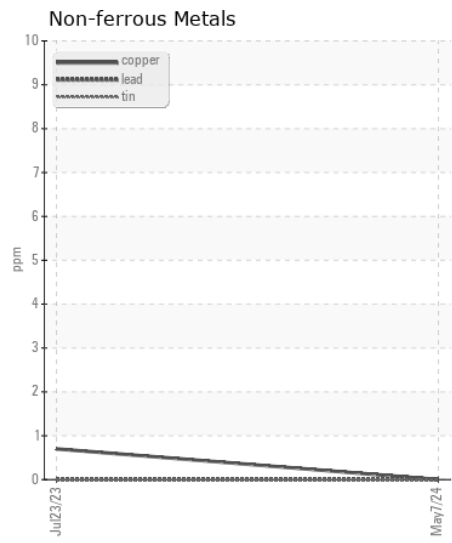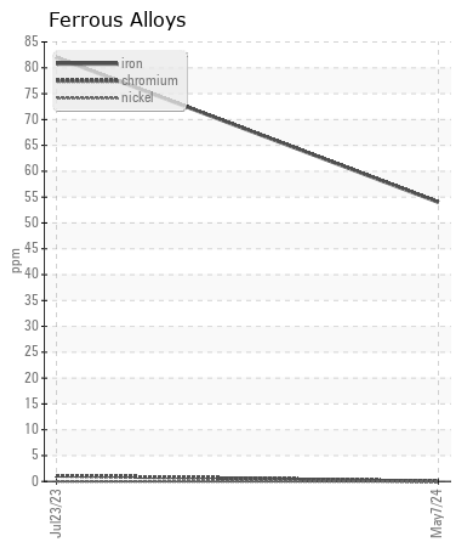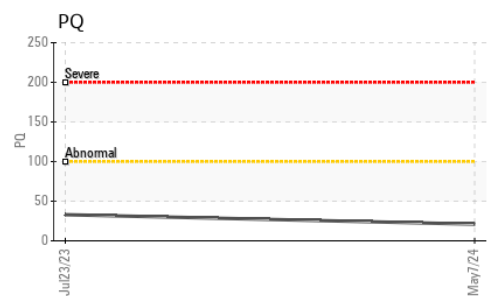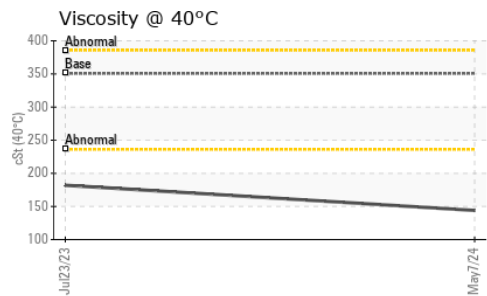

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0211450 **Received** : 09 May 2024  
**Lab Number** : 06174165 **Tested** : 10 May 2024  
**Unique Number** : 11020218 **Diagnosed** : 12 May 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005  
 Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)