



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[W30601]**

Machine Id  
**JOHN DEERE 410R 1N0410RXPR0242396**

Component  
**Front Left Final Drive**

Fluid  
**JOHN DEERE GL-5 85W140LS (--- QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0204279</b>	---	---
Sample Date		Client Info		<b>22 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>96</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>363</b>	---	---
Iron	ppm	ASTM D5185m	>750	<b>379</b>	---	---
Chromium	ppm	ASTM D5185m	>9	<b>10</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>40	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>40	<b>18</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>15</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	---	---
Water		WC Method	>0.075	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	---	---

### FLUID CONDITION

Confirm oil type. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>133</b>	---	---
Boron	ppm	ASTM D5185m		<b>2</b>	---	---
Barium	ppm	ASTM D5185m		<b>9</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>8</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>3</b>	---	---
Calcium	ppm	ASTM D5185m		<b>161</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>271</b>	---	---
Zinc	ppm	ASTM D5185m		<b>36</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>24546</b>	---	---
Visc @ 40°C	cSt	ASTM D445	350.7	<b>245</b>	---	---

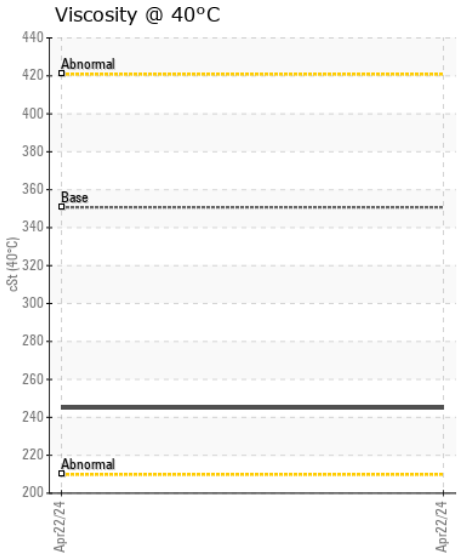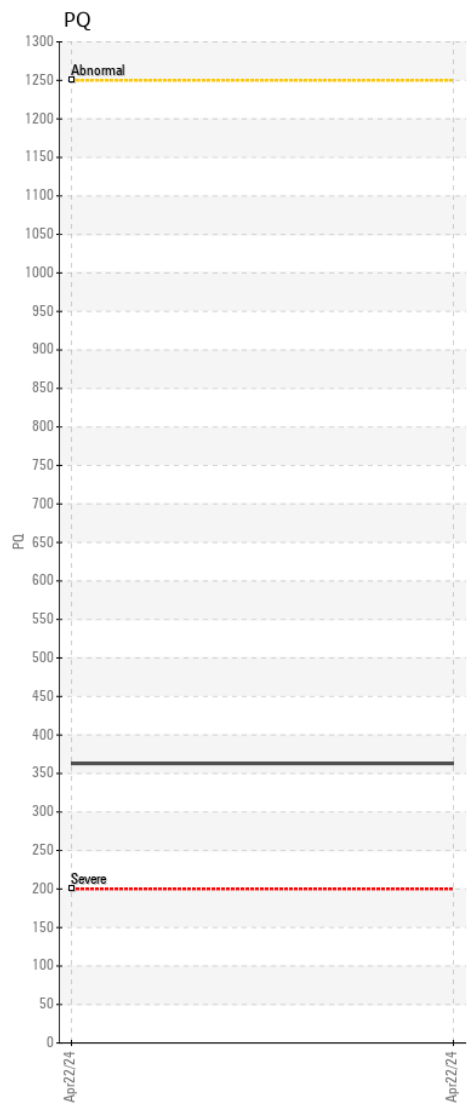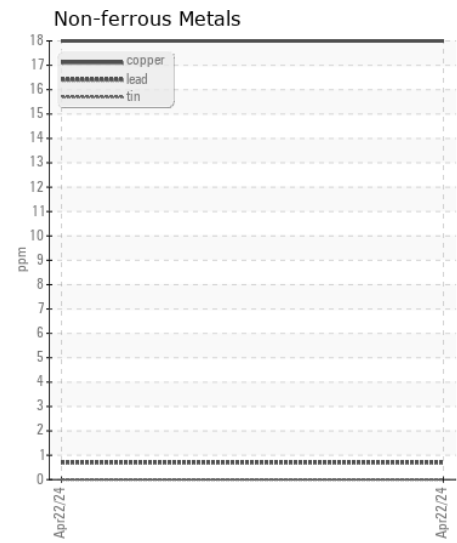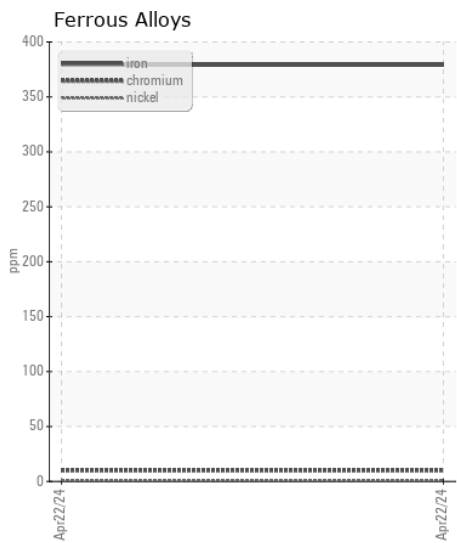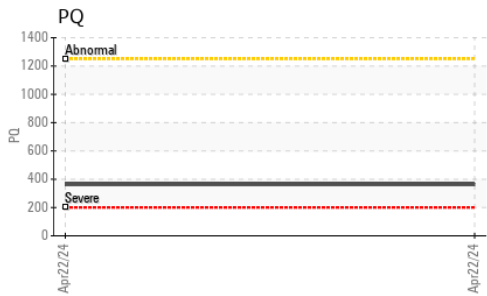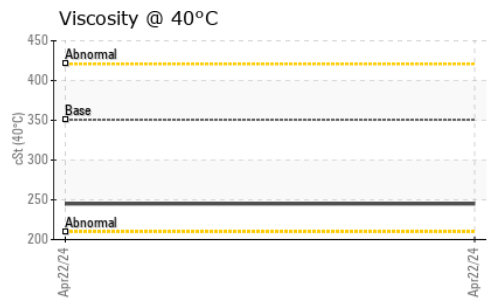

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0204279 **Received** : 09 May 2024  
**Lab Number** : 06174202 **Tested** : 10 May 2024  
**Unique Number** : 11020255 **Diagnosed** : 12 May 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - STATESVILLE**  
 635 MOCKSVILLE HWY  
 STATESVILLE, NC  
 US 28625

Contact: MIKE CRANFILL  
 MCRANFILL@JAMESRIVEREQUIPMENT.COM  
 T: (704)872-6411  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)