



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[715086 ALTA RENTS]
 Machine Id
VOLVO A25G 752923
 Component
Bogie/Center Axle
 Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP449659	VCP437965	---
Sample Date		Client Info		06 May 2024	29 Jan 2024	---
Machine Age	hrs	Client Info		1106	574	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Not Changed	Not Changed	---
Sample Status				NORMAL	ATTENTION	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	149	250	---
Chromium	ppm	ASTM D5185m	>20	3	6	---
Nickel	ppm	ASTM D5185m	>10	2	4	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	0	<1	---
Lead	ppm	ASTM D5185m	>50	<1	<1	---
Copper	ppm	ASTM D5185m	>150	8	21	---
Tin	ppm	ASTM D5185m	>20	0	1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	3	5	---
Potassium	ppm	ASTM D5185m	>20	<1	4	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	0	---
Boron	ppm	ASTM D5185m	111	71	301	---
Barium	ppm	ASTM D5185m	0.0	<1	0	---
Molybdenum	ppm	ASTM D5185m	0.9	3	9	---
Manganese	ppm	ASTM D5185m	0.0	4	13	---
Magnesium	ppm	ASTM D5185m	39	4	3	---
Calcium	ppm	ASTM D5185m	93	133	155	---
Phosphorus	ppm	ASTM D5185m	920	738	1304	---
Zinc	ppm	ASTM D5185m	104	61	73	---
Sulfur	ppm	ASTM D5185m	20179	24397	24019	---
Visc @ 40°C	cSt	ASTM D445	333	275	101	---

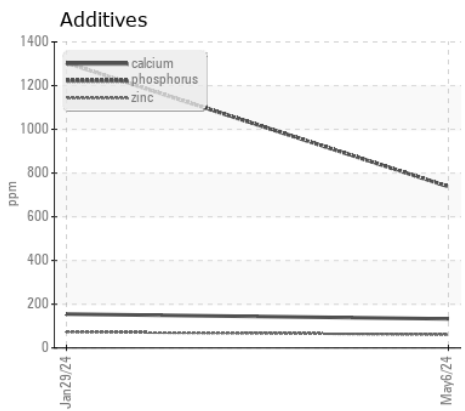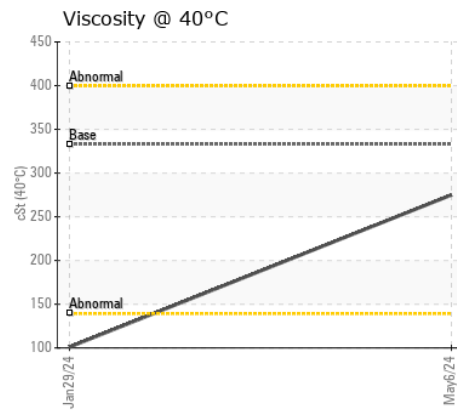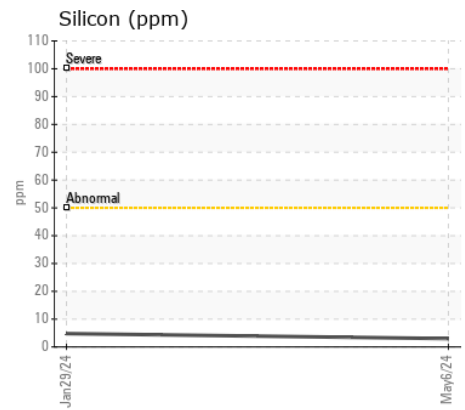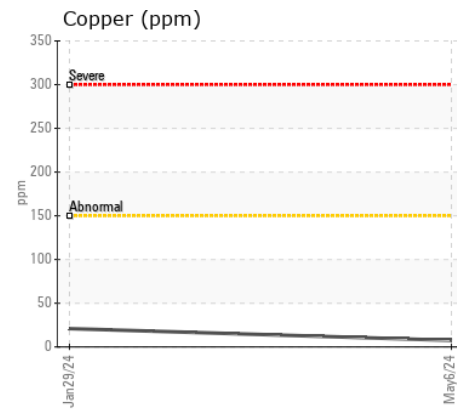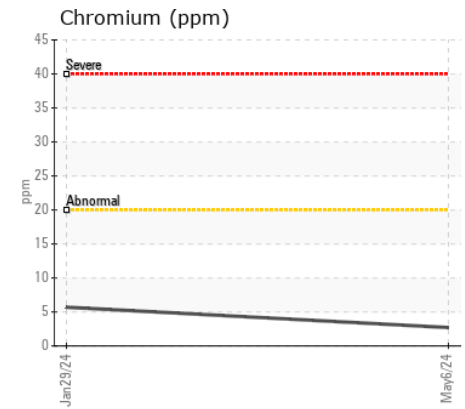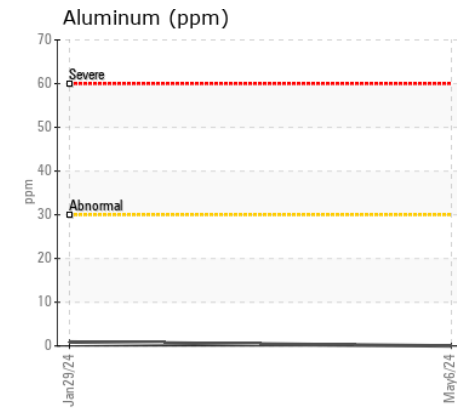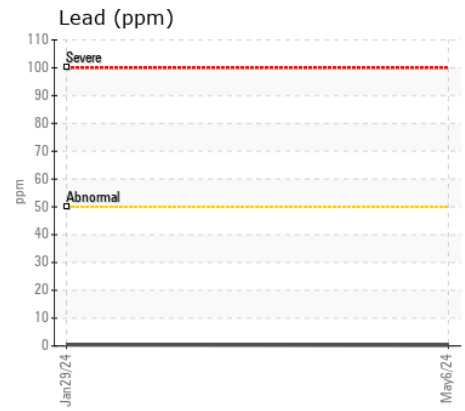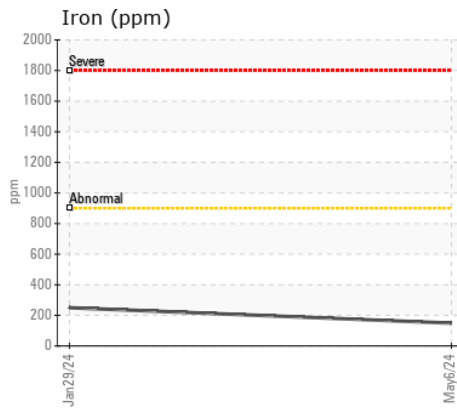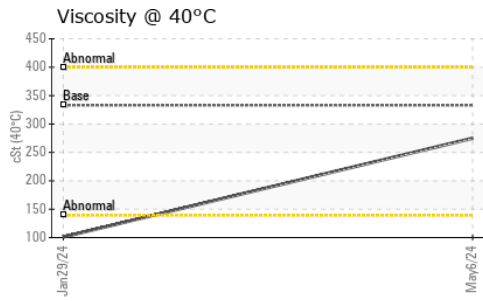

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP449659
Lab Number : 06174227
Unique Number : 11020280
Test Package : MOB 1

Received : 09 May 2024
Tested : 10 May 2024
Diagnosed : 10 May 2024 - Wes Davis

ALTA EQUIPMENT/FLAGLER EQUIPMENT LLC
 9601 BOGGY CREEK RD
 ORLANDO, FL
 US 32824

Contact: Robert LaPlante
 robert.laplante@altg.com

T: (407)508-9736
 F: (407)659-8720

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)