



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[SWO-071569]
 Machine Id
VOLVO A45G 353090
 Component
Brake
 Fluid
SAE 80 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION










The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP453726	VCP447538	VCP432852
Sample Date		Client Info		02 May 2024	03 Jan 2024	19 Sep 2023
Machine Age	hrs	Client Info		3089	2588	2023
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Not Changed	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

Iron	ppm	ASTM D5185m	>50	37	37	23
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	6	8	6
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>30	1	2	3
Lead	ppm	ASTM D5185m	>50	4	<1	0
Copper	ppm	ASTM D5185m	>200	155	▲ 209	136
Tin	ppm	ASTM D5185m	>20	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>50	20	26	18
Potassium	ppm	ASTM D5185m	>20	<1	3	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m		11	8	9
Boron	ppm	ASTM D5185m		118	144	110
Barium	ppm	ASTM D5185m		0	8	0
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		1	2	<1
Magnesium	ppm	ASTM D5185m		11	11	6
Calcium	ppm	ASTM D5185m		3529	4504	3287
Phosphorus	ppm	ASTM D5185m		1403	1608	1256
Zinc	ppm	ASTM D5185m		1637	1983	1474
Sulfur	ppm	ASTM D5185m		5187	5446	4430
Visc @ 40°C	cSt	ASTM D445	77.9	77.3	40.9	40.6

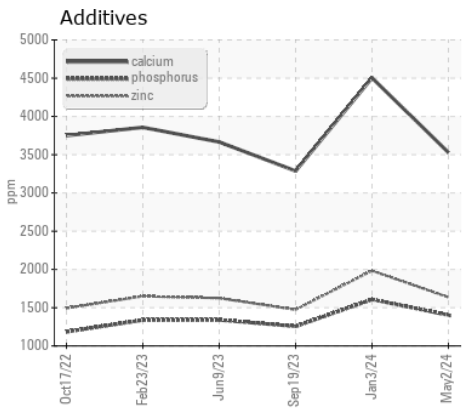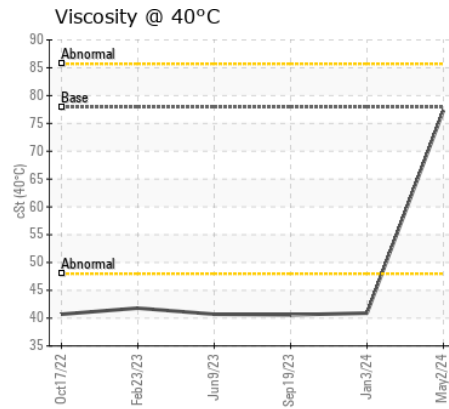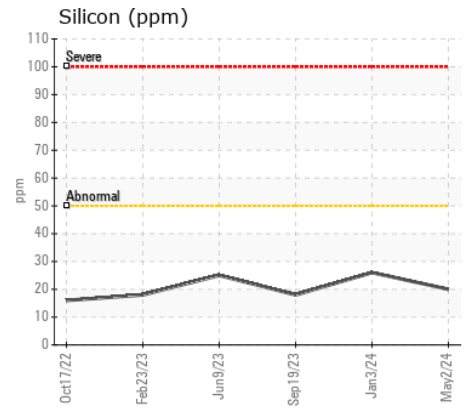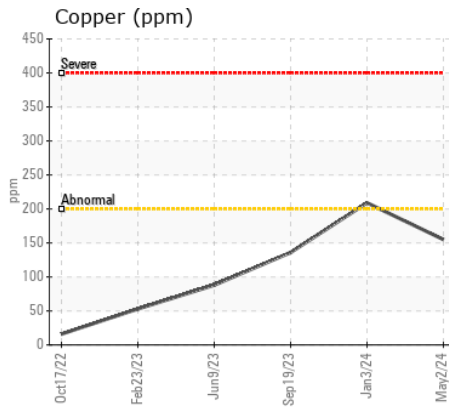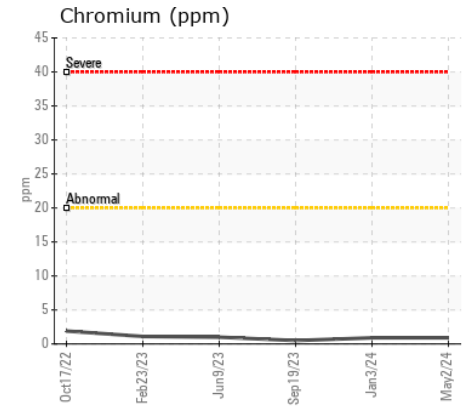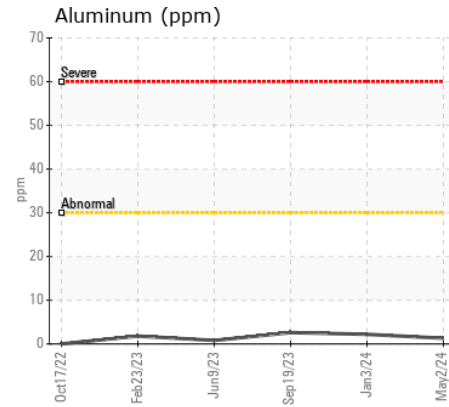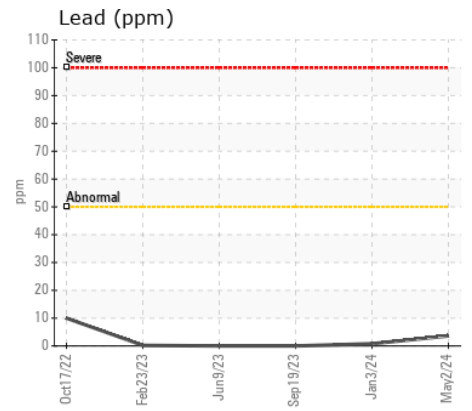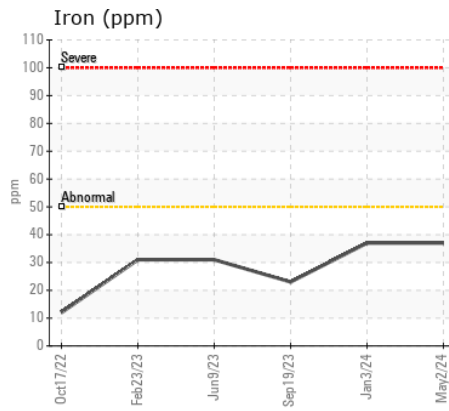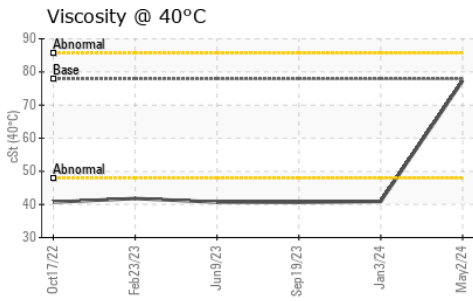

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP453726

Lab Number : 06174259

Unique Number : 11020312

Test Package : MOB 1

Received : 09 May 2024

Tested : 10 May 2024

Diagnosed : 13 May 2024 - Angela Borella

SAIIA CONSTRUCTION LLC

4400 LEWISBURG RD

BIRMINGHAM, AL

US 35207

Contact: STEPHANI BRITTON

sbritton@saiia.com;doug.bogart@wearcheck.com

T: (205)943-2268

F: (205)943-2269

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)