



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Area

[MARKS CLEAR/GRADING]

Machine Id

VOLVO EC250EL E30 (S/N 316501)

Component

Right Final Drive

Fluid

VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011391	ASC0008901	---
Sample Date		Client Info		08 May 2024	02 Feb 2024	---
Machine Age	hrs	Client Info		1417	951	---
Oil Age	hrs	Client Info		417	951	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				ATTENTION	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	3	284	---
Chromium	ppm	ASTM D5185m	>10	0	4	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	0	2	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>50	0	<1	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

### CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<1	27	---
Potassium	ppm	ASTM D5185m	>20	<1	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

### FLUID CONDITION

The oil viscosity is higher than normal. Confirm oil type.

Sodium	ppm	ASTM D5185m		0	2	---
Boron	ppm	ASTM D5185m	379	219	0	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.8	0	<1	---
Manganese	ppm	ASTM D5185m	0.0	0	5	---
Magnesium	ppm	ASTM D5185m	31	0	0	---
Calcium	ppm	ASTM D5185m	38	26	0	---
Phosphorus	ppm	ASTM D5185m	1077	1097	266	---
Zinc	ppm	ASTM D5185m	46	4	0	---
Sulfur	ppm	ASTM D5185m	23526	35212	15898	---
Visc @ 40°C	cSt	ASTM D445	139	371	171	---

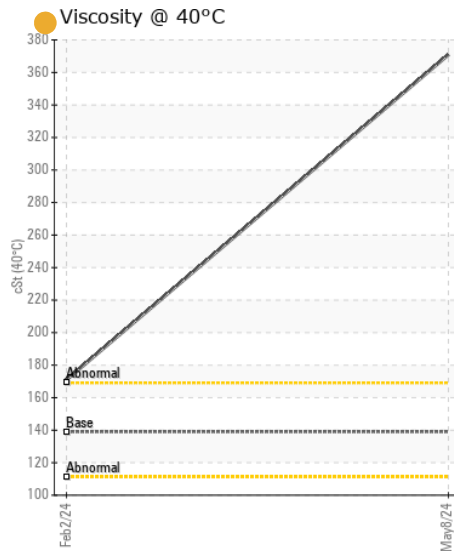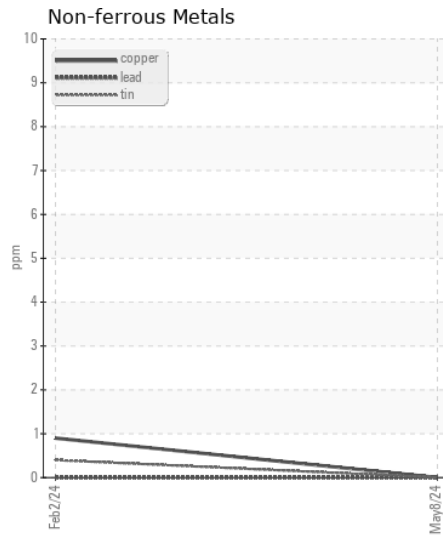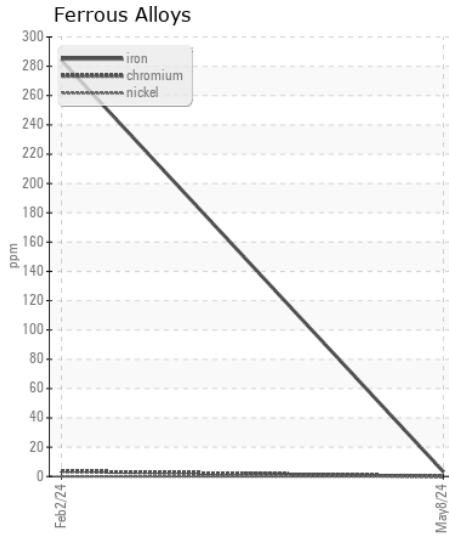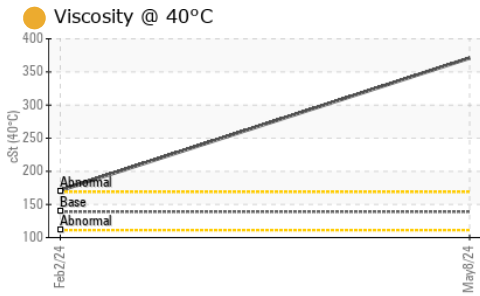

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0011391  
**Lab Number** : 06174322  
**Unique Number** : 11020375  
**Test Package** : CONST

**Received** : 09 May 2024  
**Tested** : 10 May 2024  
**Diagnosed** : 13 May 2024 - Don Baldrige

**113 - ASCENDUM MACHINERY INC - GARNER**  
 3561 JONES SAUSAGE ROAD  
 GARNER, NC  
 US 27529  
 Contact: KYLE STETSON  
 kyle.stetson@ascendummachinery.com  
 T:  
 F: (919)661-9038

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)