



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[MARKS CLEAR/GRADING]
 Machine Id
VOLVO A30G E94 (S/N 752530)
 Component
Bogie/Center Axle
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011444	---	---
Sample Date		Client Info		07 May 2024	---	---
Machine Age	hrs	Client Info		2088	---	---
Oil Age	hrs	Client Info		1088	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	263	---	---
Chromium	ppm	ASTM D5185m	>20	5	---	---
Nickel	ppm	ASTM D5185m	>10	3	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	<1	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>150	32	---	---
Tin	ppm	ASTM D5185m	>20	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	4	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		263	---	---
Barium	ppm	ASTM D5185m		5	---	---
Molybdenum	ppm	ASTM D5185m		15	---	---
Manganese	ppm	ASTM D5185m		15	---	---
Magnesium	ppm	ASTM D5185m		<1	---	---
Calcium	ppm	ASTM D5185m		974	---	---
Phosphorus	ppm	ASTM D5185m		1383	---	---
Zinc	ppm	ASTM D5185m		409	---	---
Sulfur	ppm	ASTM D5185m		23114	---	---
Visc @ 40°C	cSt	ASTM D445		85.9	---	---

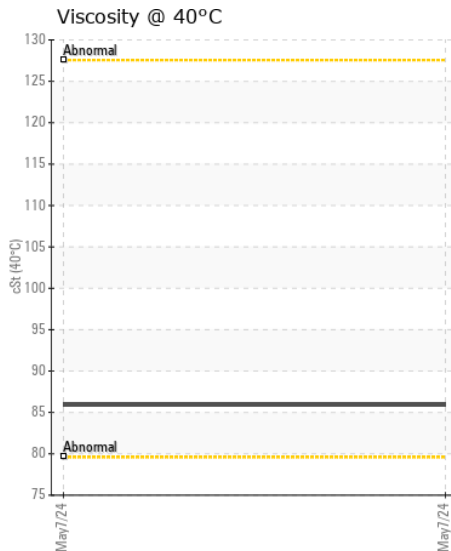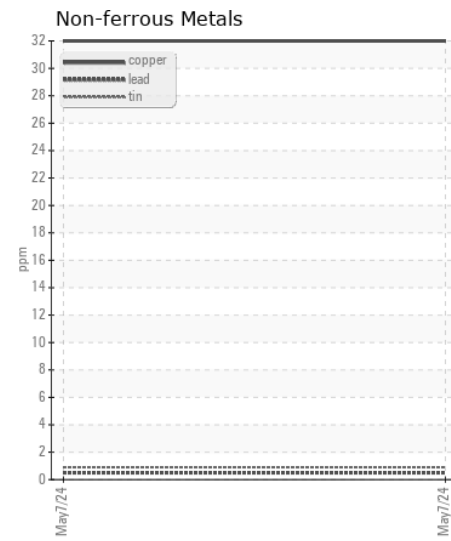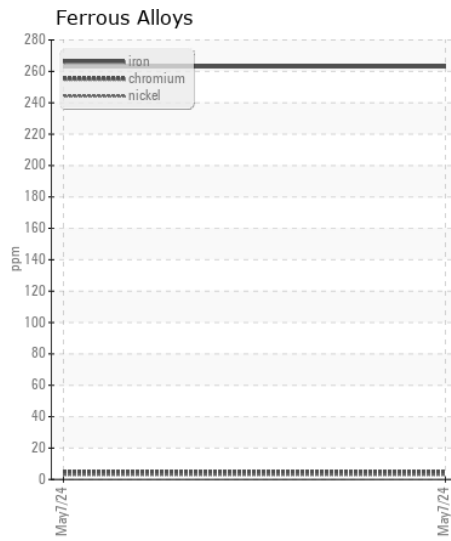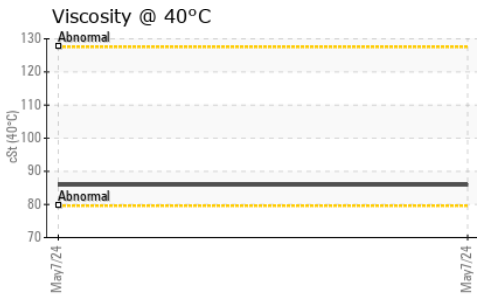

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0011444
Lab Number : 06174323
Unique Number : 11020376
Test Package : CONST

Received : 09 May 2024
Tested : 10 May 2024
Diagnosed : 10 May 2024 - Wes Davis

113 - ASCENDUM MACHINERY INC - GARNER
 3561 JONES SAUSAGE ROAD
 GARNER, NC
 US 27529

Contact: TRENT BROADWELL
 trent.broadwell@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)661-8817
 F: (919)661-9038