



**McCLUNG-LOGAN**  
EQUIPMENT COMPANY, INC.

OIL ANALYSIS REPORT

|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |



Area  
**[W02008250]**  
Machine Id  
**VOLVO A30G 752448**  
Component  
**Front Axle**  
Fluid  
**{not provided} (11 GAL)**

**RECOMMENDATION**

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample. ( Customer Sample Comment: W02008250 )

**WEAR**

All component wear rates are normal.





**CONTAMINATION**

There is no indication of any contamination in the oil.

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

| Test             | UOM    | Method      | Limit/Abn | Current            | History1 | History2 |
|------------------|--------|-------------|-----------|--------------------|----------|----------|
| Sample Number    |        | Client Info |           | <b>ML0001023</b>   | ---      | ---      |
| Sample Date      |        | Client Info |           | <b>07 May 2024</b> | ---      | ---      |
| Machine Age      | hrs    | Client Info |           | <b>2760</b>        | ---      | ---      |
| Oil Age          | hrs    | Client Info |           | <b>2760</b>        | ---      | ---      |
| Filter Age       | hrs    | Client Info |           | <b>0</b>           | ---      | ---      |
| Oil Changed      |        | Client Info |           | <b>Changed</b>     | ---      | ---      |
| Filter Changed   |        | Client Info |           | <b>N/A</b>         | ---      | ---      |
| Sample Status    |        |             |           | <b>NORMAL</b>      | ---      | ---      |
| Iron             | ppm    | ASTM D5185m | >900      | <b>315</b>         | ---      | ---      |
| Chromium         | ppm    | ASTM D5185m | >20       | <b>5</b>           | ---      | ---      |
| Nickel           | ppm    | ASTM D5185m | >10       | <b>4</b>           | ---      | ---      |
| Titanium         | ppm    | ASTM D5185m |           | <b>&lt;1</b>       | ---      | ---      |
| Silver           | ppm    | ASTM D5185m |           | <b>0</b>           | ---      | ---      |
| Aluminum         | ppm    | ASTM D5185m | >30       | <b>2</b>           | ---      | ---      |
| Lead             | ppm    | ASTM D5185m | >50       | <b>0</b>           | ---      | ---      |
| Copper           | ppm    | ASTM D5185m | >150      | <b>25</b>          | ---      | ---      |
| Tin              | ppm    | ASTM D5185m | >20       | <b>1</b>           | ---      | ---      |
| Vanadium         | ppm    | ASTM D5185m |           | <b>&lt;1</b>       | ---      | ---      |
| White Metal      | scalar | *Visual     | NONE      | <b>NONE</b>        | ---      | ---      |
| Yellow Metal     | scalar | *Visual     | NONE      | <b>NONE</b>        | ---      | ---      |
| Silicon          | ppm    | ASTM D5185m | >50       | <b>7</b>           | ---      | ---      |
| Potassium        | ppm    | ASTM D5185m | >20       | <b>6</b>           | ---      | ---      |
| Water            |        | WC Method   | >0.2      | <b>NEG</b>         | ---      | ---      |
| Silt             | scalar | *Visual     | NONE      | <b>MODER</b>       | ---      | ---      |
| Debris           | scalar | *Visual     | NONE      | <b>NONE</b>        | ---      | ---      |
| Sand/Dirt        | scalar | *Visual     | NONE      | <b>NONE</b>        | ---      | ---      |
| Appearance       | scalar | *Visual     | NORML     | <b>NORML</b>       | ---      | ---      |
| Odor             | scalar | *Visual     | NORML     | <b>NORML</b>       | ---      | ---      |
| Emulsified Water | scalar | *Visual     | >0.2      | <b>NEG</b>         | ---      | ---      |
| Sodium           | ppm    | ASTM D5185m |           | <b>&lt;1</b>       | ---      | ---      |
| Boron            | ppm    | ASTM D5185m |           | <b>294</b>         | ---      | ---      |
| Barium           | ppm    | ASTM D5185m |           | <b>4</b>           | ---      | ---      |
| Molybdenum       | ppm    | ASTM D5185m |           | <b>9</b>           | ---      | ---      |
| Manganese        | ppm    | ASTM D5185m |           | <b>9</b>           | ---      | ---      |
| Magnesium        | ppm    | ASTM D5185m |           | <b>2</b>           | ---      | ---      |
| Calcium          | ppm    | ASTM D5185m |           | <b>864</b>         | ---      | ---      |
| Phosphorus       | ppm    | ASTM D5185m |           | <b>1514</b>        | ---      | ---      |
| Zinc             | ppm    | ASTM D5185m |           | <b>374</b>         | ---      | ---      |
| Sulfur           | ppm    | ASTM D5185m |           | <b>21844</b>       | ---      | ---      |
| Visc @ 40°C      | cSt    | ASTM D445   |           | <b>86.9</b>        | ---      | ---      |

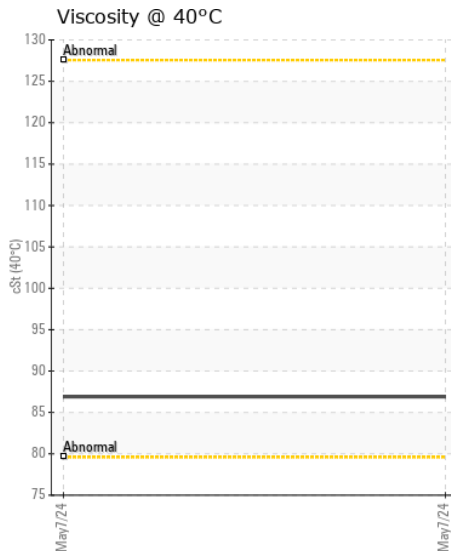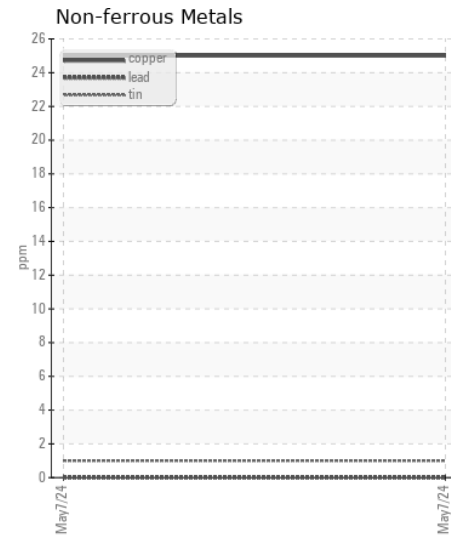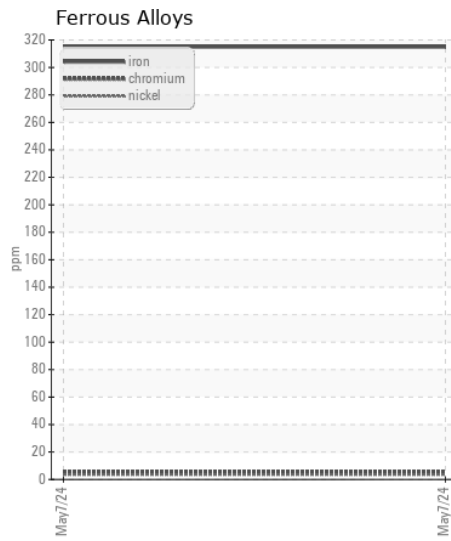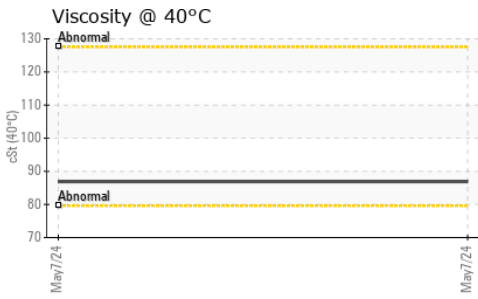

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0001023  
**Lab Number** : 06174353  
**Unique Number** : 11020406  
**Test Package** : CONST  
**Received** : 09 May 2024  
**Tested** : 10 May 2024  
**Diagnosed** : 13 May 2024 - Don Baldrige

**WILLIAM HAZEL**  
 PO BOX 600  
 CHANTILLY, VA  
 US 20153

Contact: SERVICE MANAGER  
 jimmy\_elswick@wahazel.com

T: (703)378-8300

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: