



OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[W02008234]**  
Machine Id  
**VOLVO A30F 82081**  
Component  
**Drop Box**  
Fluid  
**GEAR OIL SAE 80W140 (3 GAL)**

**RECOMMENDATION**

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. ( Customer Sample Comment: W02008234 )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ML0000959</b>	---	---
Sample Date		Client Info		<b>07 May 2024</b>	---	---
Machine Age	hrs	Client Info		<b>11330</b>	---	---
Oil Age	hrs	Client Info		<b>2000</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>22</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>30	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>30	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>7</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Boron	ppm	ASTM D5185m	400	<b>179</b>	---	---
Barium	ppm	ASTM D5185m	200	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	12	<b>3</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m	12	<b>11</b>	---	---
Calcium	ppm	ASTM D5185m	150	<b>135</b>	---	---
Phosphorus	ppm	ASTM D5185m	1650	<b>938</b>	---	---
Zinc	ppm	ASTM D5185m	125	<b>74</b>	---	---
Sulfur	ppm	ASTM D5185m	22500	<b>25814</b>	---	---
Visc @ 40°C	cSt	ASTM D445	263	<b>300</b>	---	---

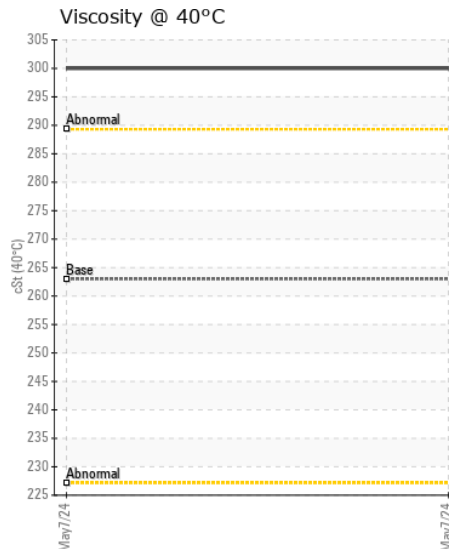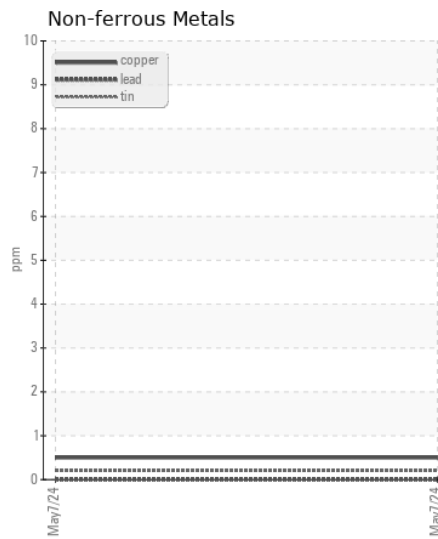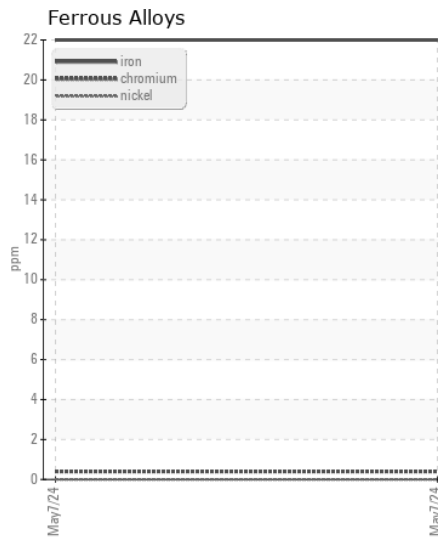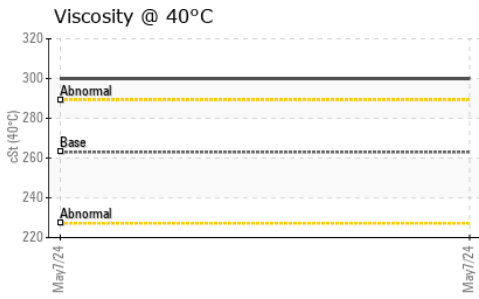

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : ML0000959

**Lab Number** : 06174363

**Unique Number** : 11020416

**Test Package** : CONST

**Received** : 09 May 2024

**Tested** : 10 May 2024

**Diagnosed** : 13 May 2024 - Don Baldrige

**WILLIAM HAZEL**

PO BOX 600

CHANTILLY, VA

US 20153

Contact: SERVICE MANAGER

jimmy\_elswick@wahazel.com

T: (703)378-8300

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)