



McCLUNG-LOGAN
EQUIPMENT COMPANY, INC.

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area
[W05004186]
Machine Id
VOLVO A40F 11613
Component
Drop Box
Fluid
VOLVO SUPER GEAR OIL 75W-80-GO102 (3 GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: W05004186)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0001007	VCP192274	VCP195667
Sample Date		Client Info		02 May 2024	23 May 2017	30 Aug 2016
Machine Age	hrs	Client Info		15926	6189	4160
Oil Age	hrs	Client Info		2000	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	Not Changed	Not Changed
Sample Status				ATTENTION	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	75	60	122
Chromium	ppm	ASTM D5185m	>20	<1	<1	2
Nickel	ppm	ASTM D5185m	>10	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	<1	16
Lead	ppm	ASTM D5185m	>30	0	0	0
Copper	ppm	ASTM D5185m	>30	<1	<1	<1
Tin	ppm	ASTM D5185m	>20	<1	0	2
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	LIGHT	HEAVY
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	4	2	56
Potassium	ppm	ASTM D5185m	>20	2	0	3
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The oil viscosity is higher than normal. Confirm oil type.

Sodium	ppm	ASTM D5185m		0	2	5
Boron	ppm	ASTM D5185m		282	242	230
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		4	<1	1
Manganese	ppm	ASTM D5185m		<1	0	2
Magnesium	ppm	ASTM D5185m		22	2	10
Calcium	ppm	ASTM D5185m		140	15	31
Phosphorus	ppm	ASTM D5185m		1032	2372	2291
Zinc	ppm	ASTM D5185m		85	14	20
Sulfur	ppm	ASTM D5185m		22181	28953	26230
Visc @ 40°C	cSt	ASTM D445		235	52.04	52.32

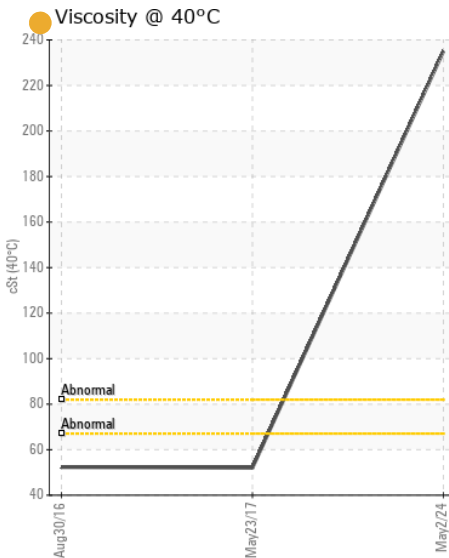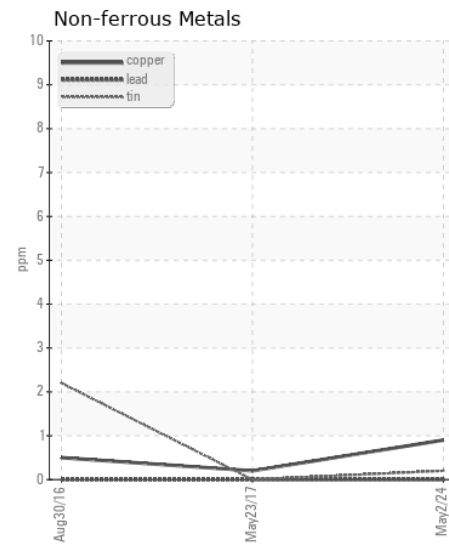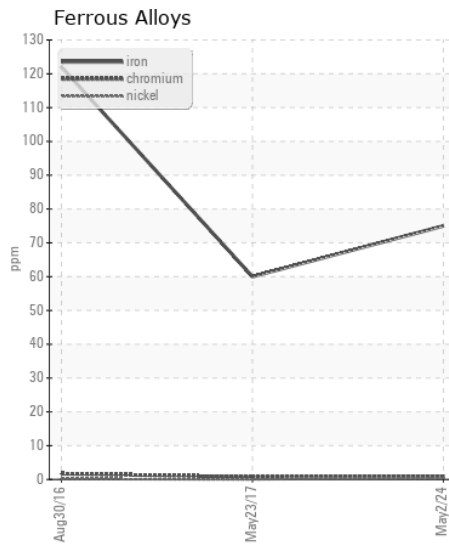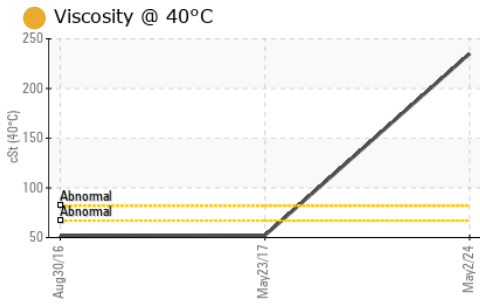

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001007
Lab Number : 06174367
Unique Number : 11020420
Test Package : CONST

Received : 09 May 2024
Tested : 10 May 2024
Diagnosed : 13 May 2024 - Don Baldrige

MCCLUNG-LOGAN EQUIPMENT CO - MANASSAS
 8450 QUARRY ROAD
 MANASSAS, VA
 US 20110
 Contact: MIKE MAYHUGH
 MMAYHUGH@MCCLUNG-LOGAN.COM
 T: (703)393-7344
 F: (703)393-7844

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)