



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
420086
 Component
Transmission (Auto)
 Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Transmissi9n)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0112053	GFL0112091	GFL0105454
Sample Date		Client Info		04 May 2024	01 Apr 2024	07 Feb 2024
Machine Age	mls	Client Info		223991	221489	217346
Oil Age	mls	Client Info		223991	221489	217346
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	10	18	23
Chromium	ppm	ASTM D5185m	>5	<1	<1	0
Nickel	ppm	ASTM D5185m	>5	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	3	6	7
Lead	ppm	ASTM D5185m	>50	2	2	5
Copper	ppm	ASTM D5185m	>225	155	119	72
Tin	ppm	ASTM D5185m	>10	<1	1	1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	6	8	6
Potassium	ppm	ASTM D5185m	>20	2	2	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		7	8	2
Boron	ppm	ASTM D5185m		98	50	31
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		4	3	<1
Calcium	ppm	ASTM D5185m		652	563	298
Phosphorus	ppm	ASTM D5185m		655	516	360
Zinc	ppm	ASTM D5185m		28	41	8
Sulfur	ppm	ASTM D5185m		1858	1477	861
Visc @ 40°C	cSt	ASTM D445	35.0	23.2	23.8	27.2

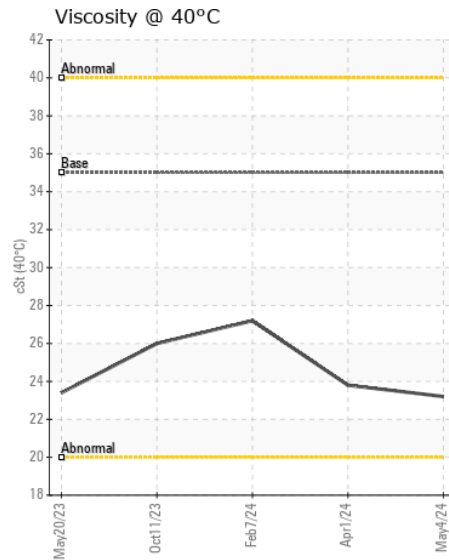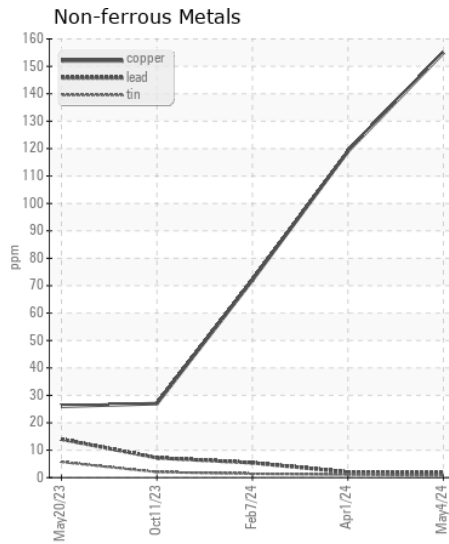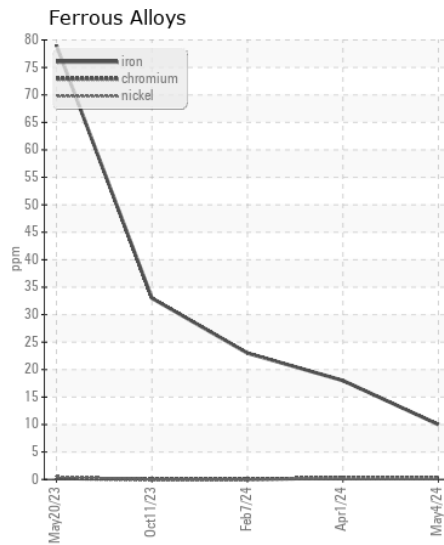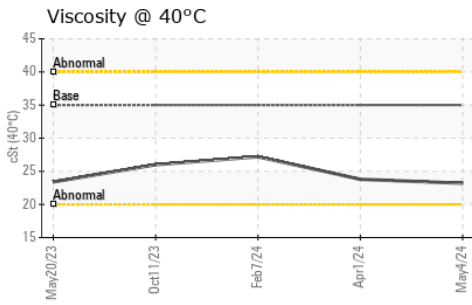

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0112053
Lab Number : 06174416
Unique Number : 11020469
Test Package : FLEET

Received : 09 May 2024
Tested : 10 May 2024
Diagnosed : 13 May 2024 - Don Baldrige

GFL Environmental - 983 - Sugar Land Hauling
 16011 West Belfort Street
 Sugar Land, TX
 US 77498
 Contact: TECHNICIAN ACCOUNT
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: