



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area

**[715086 ALTA RENTS]**

Machine Id

**VOLVO A25G 752923**

Component

**Transmission (Auto)**

Fluid

**VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP449664</b>	VCP436613	---
Sample Date		Client Info		<b>06 May 2024</b>	29 Jan 2024	---
Machine Age	hrs	Client Info		<b>1106</b>	574	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changed</b>	Not Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	<b>28</b>	23	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>6</b>	6	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>50	<b>19</b>	12	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>225	<b>45</b>	37	---
Tin	ppm	ASTM D5185m	>10	<b>7</b>	5	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>14</b>	16	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	3	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>5</b>	<1	---
Boron	ppm	ASTM D5185m	187	<b>95</b>	83	---
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	0.0	<b>0</b>	<1	---
Manganese	ppm	ASTM D5185m	0.0	<b>3</b>	3	---
Magnesium	ppm	ASTM D5185m	6.8	<b>1</b>	2	---
Calcium	ppm	ASTM D5185m	215	<b>78</b>	70	---
Phosphorus	ppm	ASTM D5185m	445	<b>207</b>	190	---
Zinc	ppm	ASTM D5185m	56	<b>8</b>	0	---
Sulfur	ppm	ASTM D5185m	1336	<b>1945</b>	1849	---
Visc @ 40°C	cSt	ASTM D445	35.3	<b>28.8</b>	28.7	---

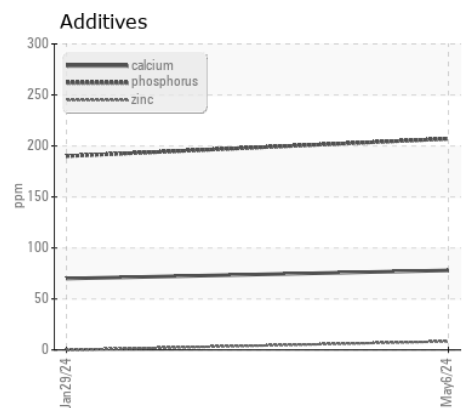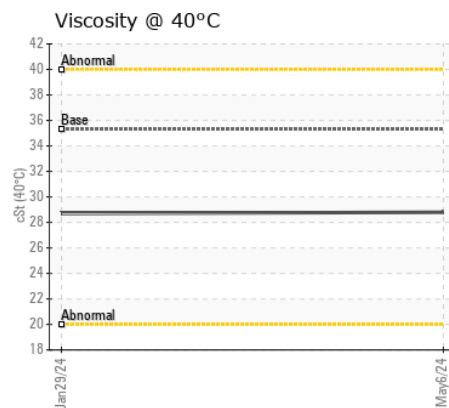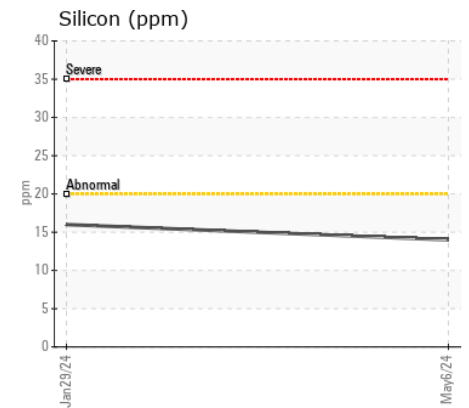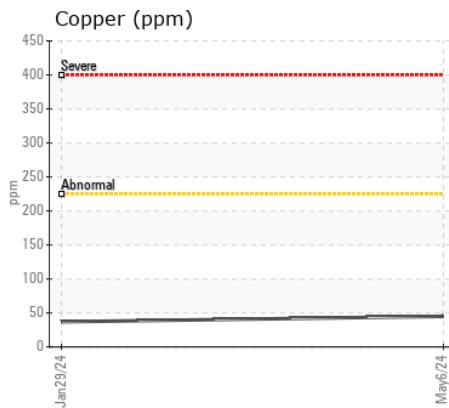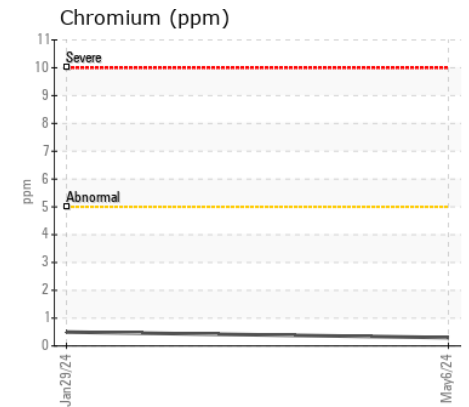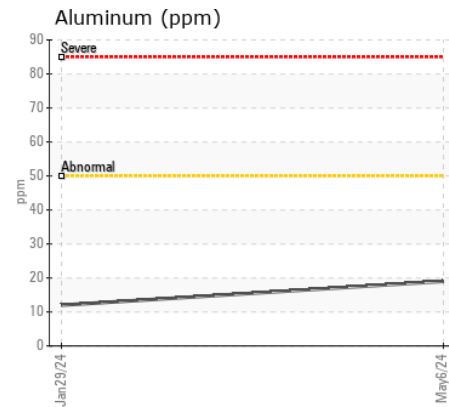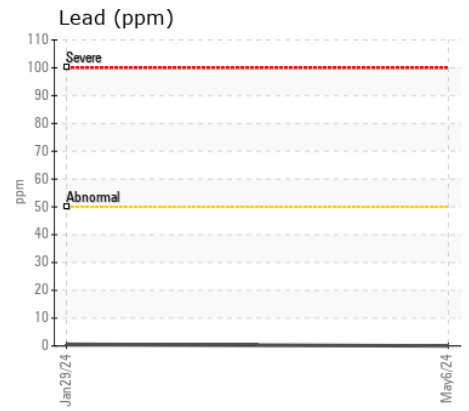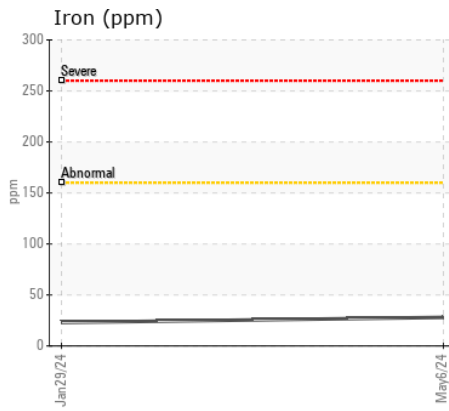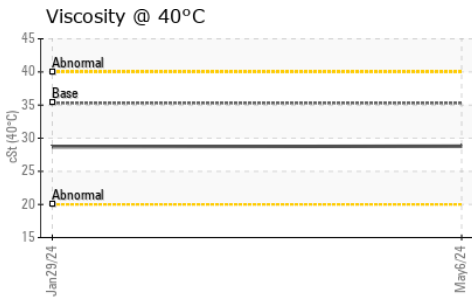

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP449664  
**Lab Number** : 06174443  
**Unique Number** : 11020496  
**Test Package** : MOB 1

**Received** : 09 May 2024  
**Tested** : 10 May 2024  
**Diagnosed** : 13 May 2024 - Don Baldrige

**ALTA EQUIPMENT/FLAGLER EQUIPMENT LLC**  
 9601 BOGGY CREEK RD  
 ORLANDO, FL  
 US 32824

Contact: Robert LaPlante  
 robert.laplante@altg.com

T: (407)508-9736  
 F: (407)659-8720

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)